


INFORMATION

MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP) or plated (AN)
IMPELLER:	Glass reinforced thermoplastic, UL 94V-0
BEARING:	Two-ball or sleeve available
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type -20°C~+70°C; Sleeve type -10°C~+55°C
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
LIFE EXPECTANCY:	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
WEIGHT:	4,240 gm (4.5 pounds)

sA28089

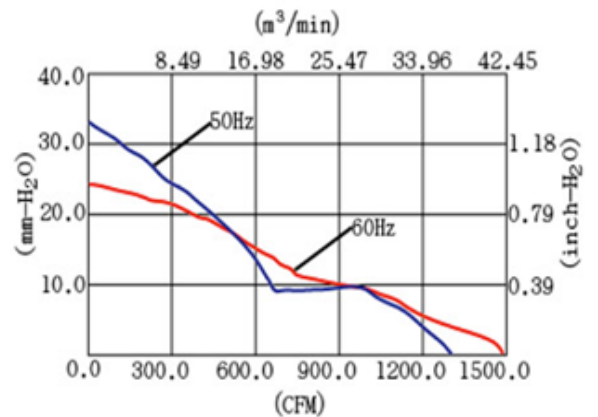

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m³/min	CFM	mm-H2O	inch-H2O	
sA28089V1H	115	50/60	2800/3200	1.07/2.84	185/300	39.1/41.9	1380/1480	33.0/24.0	1.30/0.94	67/69
sA28089V1M	115	50/60	1500/1700	0.82/0.67	61/60	19.2/22.9	680/810	9.8/12.8	0.39/0.50	56/59
sA28089V2H	230	50/60	2800/3200	0.80/1.29	185/290	39.1/41.9	1380/1480	33.0/24.0	1.30/0.94	73/75
sA28089V2M	230	50/60	1500/1700	0.42/0.35	62/65	19.2/22.9	680/810	9.8/12.8	0.39/0.50	56/59