


INFORMATION

MOTOR:	Shaded Pole Motor. Impedance Protected
HOUSING:	Aluminum Die Casting, Painted Black
IMPELLER:	Thermoplastic PBT, UL94V-0
BEARING:	Ball type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
IP LEVEL	IP44
WEIGHT:	140 gm

sA6030

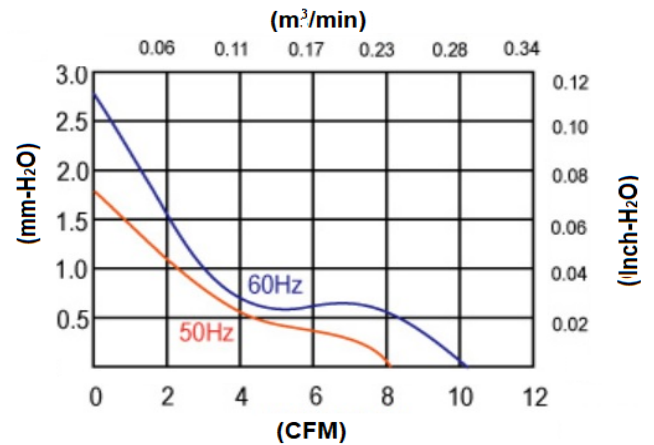

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m^3/min	CFM	mm-H ₂ O	inch-H ₂ O	
sA6030V1H	115	50/60	2400/3000	0.063/0.051	5.2/4.0	0.23/0.29	8.1/10.24	1.78/2.79	0.07/1.11	27/28
sA6030V2H	230	50/60	2400/3000	0.040/0.032	6.0/4.5	0.23/0.29	8.1/10.24	1.78/2.79	0.07/1.11	27/28