



INFORMATION

SIZE	80x80x38mm
MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Metal
BEARING:	Ball Type or Sleeve Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-10°C~+70°C
Safety	Impedance Protected
INSULATION RESISTANCE:	100 MΩ min.@500VDC
DIELECTRIC STRENGTH:	5mA Max. at 1500 VAC for 1 second
TYPE of PROTECTION	IP21 (special IP rating on request)
RoHS	Yes
WEIGHT:	421g

sA8038M

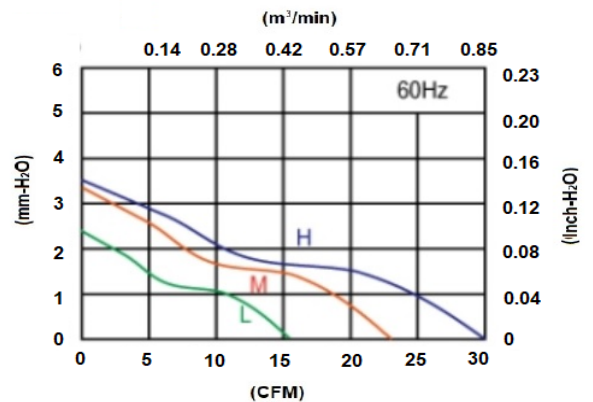

sA8038M

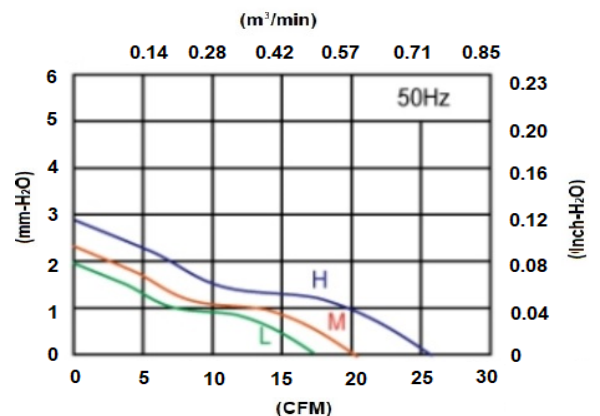

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA8038V1HM	115	50/60	2700/3100	0.14/0.12	13/12	0.74/0.88	26/30	2.90/3.40	0.12/0.14	30/35
sA8038V1MM	230	50/60	2150/2500	0.12/0.10	10/9	0.60/0.65	21/23	2.28/3.30	0.09/0.13	24/27
sA8038V1LM	115	50/60	1750/2000	0.08/0.06	10/9	0.50/0.47	17/16	1.95/2.35	0.08/0.09	21/23
sA8038V2HM	230	50/60	2700/3100	0.10/0.12	13/12	0.74/0.88	26/30	2.90/3.40	0.12/0.14	30/35
sA8038V2MM	115	50/60	2150/2500	0.08/0.07	10/9	0.60/0.65	21/23	2.28/3.30	0.09/0.13	24/27
sA8038V2LM	230	50/60	1750/2000	0.07/0.07	12/11	0.50/0.47	17/16	1.95/2.35	0.08/0.09	21/23