



INFORMATION

SIZE	80x80x38mm
MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Metal
BEARING:	Ball Type or Sleeve Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-10°C~+70°C
Safety	Impedance Protected
INSULATION RESISTANCE:	100 MΩ min.@500VDC
DIELECTRIC STRENGTH:	5mA Max. at 1500 VAC for 1 second
TYPE of PROTECTION	IP21 (special IP rating on request)
RoHS	Yes
WEIGHT:	421g

sA9238M

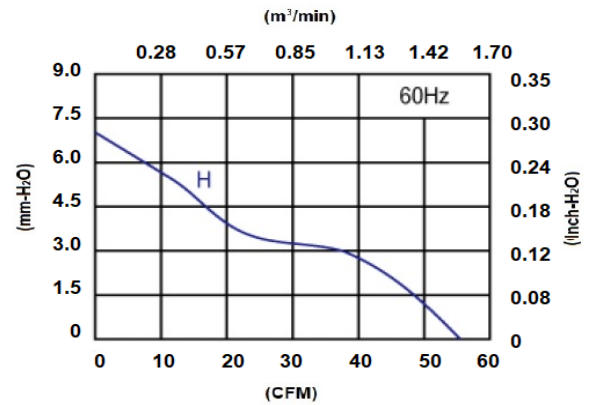

sA9238M

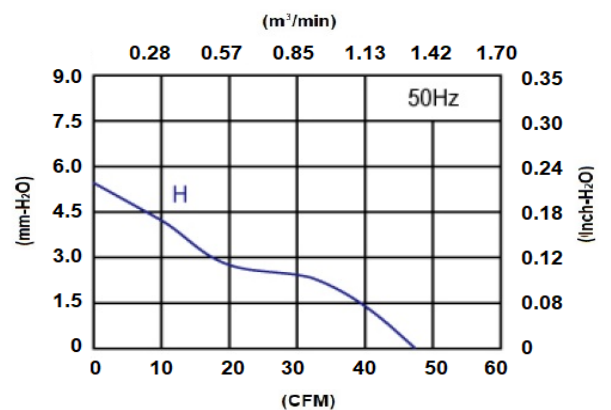

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA9238V1HM	115	50/60	2600/3000	0.25/0.24	16/14	1.33/1.56	47/55	5.4/6.9	0.21/0.27	38/43
sA9238V2HM	230	50/60	2600/3000	0.22/0.20	16/14	1.33/1.56	47/55	5.4/6.9	0.21/0.27	38/43