


## GENERAL INFORMATION

HOUSING	Plastic(PC+20% glass fiber)+Metal Piece
IMPELLER	Plastic PA. Covering Glass Fiber
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class B
OPERATING VOLTAGE RANGE	103 VAC to 106 VAC for 115V Type 207 VAC to 253 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Thermally Protected
TERMINATION	Lead Wire
WEIGHT	1.73kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

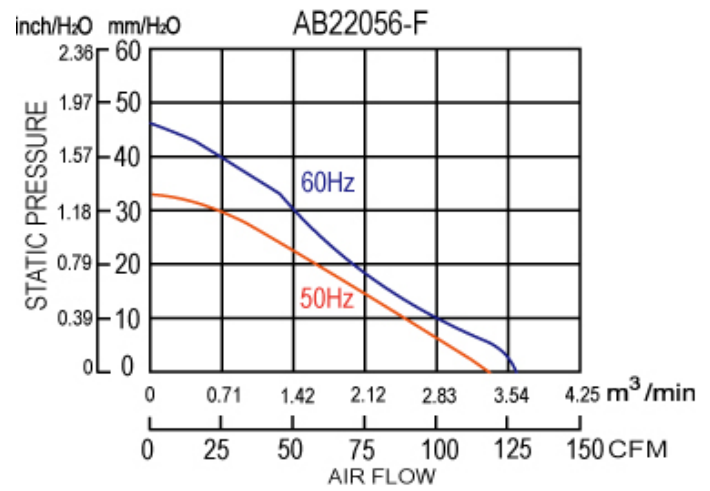

## SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m³/min	CFM	mm-H2O	inch-H2O	
sAB22056V1HB-F	115	50/60	2700/2900	0.7/0.6	50/52	3.3/3.6	118/126	33/46	1.3/1.8	63/65
sAB22056V2HB-F	230	50/60	2700/2900	0.4/0.3	50/53	3.3/3.6	118/126	33/46	1.3/1.8	63/65