


12725 127x127x25MM

General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)
Impeller: Plastic (UL94V-0)
Lead Wire: UL1007AWG#24
- ◆ Expected Life..... Ball Bearing 50,000hrs (40°C)
- ◆ Temperature Range.... Operating temperature -40°C~80°C (Non-condensing)
Storage temperature -40°C~70°C (Non-condensing)
- ◆ Safety Standards..... UL, RoHS, CE
- ◆ DC Fan Specials..... RD, FG, IPXX

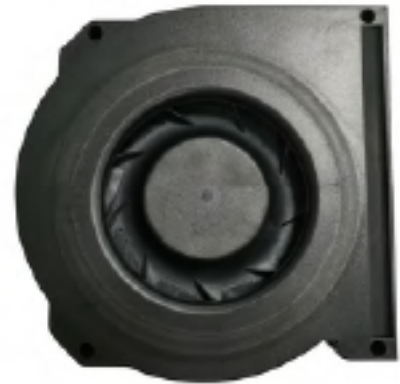


Specifications

Model	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m ³ /min	Inch-H ₂ O	mmH ₂ O	dB-A	g
sDB12725V12H	B	12	7.0~13.5	0.60	7.20	4800	34.80	0.98	1.50	39.80	62.50	272.3
sDB12725V12H	B	12	7.0~13.5	0.80	9.60	5100	36.40	1.03	1.75	44.30	64.00	272.3
sDB12725V12H	B	12	7.0~13.5	1.56	18.70	6400	46.30	1.31	2.93	74.30	69.20	272.3
sDB12725V24H	B	24	18.0~26.5	0.30	7.20	4800	34.80	0.98	1.50	39.80	62.50	272.3
sDB12725V24H	B	24	18.0~26.5	0.40	9.60	5100	36.40	1.03	1.75	44.30	64.00	272.3
sDB12725V24H	B	24	18.0~26.5	0.76	18.70	6400	46.30	1.31	2.93	74.30	69.20	272.3
sDB12725V48H	B	48	36.0~54.0	0.15	7.20	4800	34.80	0.98	1.50	39.80	62.50	272.3
sDB12725V48H	B	48	36.0~54.0	0.20	9.60	5100	36.40	1.03	1.75	44.30	64.00	272.3
sDB12725V48H	B	48	36.0~54.0	0.39	18.70	6400	46.30	1.31	2.93	74.30	69.20	272.3

Specifications are subject to change without notice. Please visit our website at <http://www.sofasco.com> for update information

Dimensions (Unit:mm)

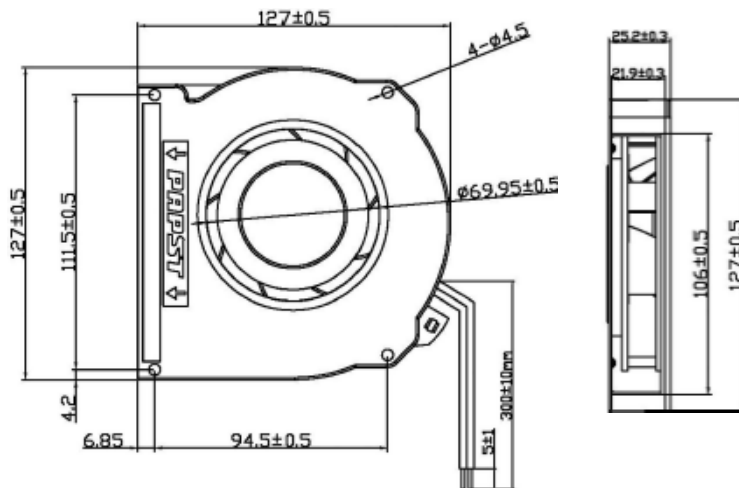

PQ Curve (At rated Voltage)

