

## 7020

## ø70x20MM

### General Specifications

- ◆ Material..... Frame: Plastic (UL94V-0)  
Impeller: Plastic (UL94V-0)  
Lead Wire: UL1007AWG#22350mm
- ◆ Expected Life..... Ball Bearing 50,000hrs (40°C)
- ◆ Temperature Range.... Operating temperature -40°C~80°C  
(Non-condensing)
- ◆ Safety Standards..... RoHS , CE
- ◆ DC Fan Specials..... RD, FG, PWM, IPXX (available with special IP rating)
- ◆ Weight ..... 90 g





### Specifications


Model	#Bearing Type	Rated Voltage	Operating Voltage	Input Current	Input Power	Speed	Max Air Flow		Max Static Pressure		Noise	Weight
Part No.	B	VDC	VDC	Amp	Watt	RPM	CFM	m <sup>3</sup> /min	Inch-H <sub>2</sub> O	mmH <sub>2</sub> O	dB-A	g
sDCF7020V12HB	B	12	7.00~13.5	1.00	12.00	9200	39.90	1.13	2.24	56.9	61.00	90.00
sDCF7020V24HB	B	24	18.0~26.5	0.50	12.00	9200	39.90	1.13	2.24	56.9	61.00	90.00
sDCF7020V48HB	B	48	36.0~54.0	0.25	12.00	9200	39.90	1.13	2.24	56.9	61.00	90.00

Specifications are subject to change without notice. Please visit our website at <http://www.sofasco.com> for update information

### Dimensions (Unit:mm)

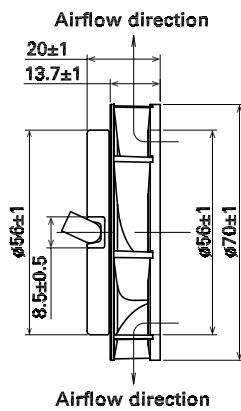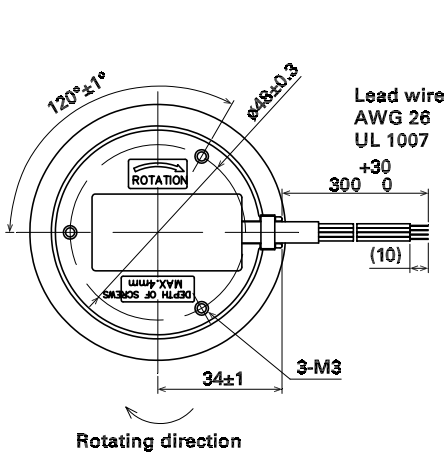

### PQ Curve (At rated Voltage)

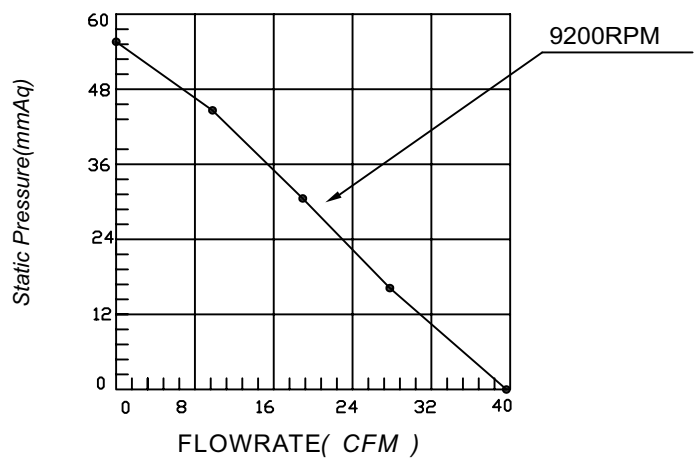

UNIT:  $\frac{\text{mm}}{(\text{INCH})}$