




HOUSING Metal/Aluminum  
 IMPELLER Aluminum, Ø43mm  
 BEARING Ball  
 OPERATING TEMPERATURE 0°C to + 45°C  
 DIELECTRIC STRENGTH 5mA Max. at 500 VAC for 1 minute  
 INSULATION RESISTANCE 10M Ω min. @500 VDC  
 MOTOR TYPE DC Brushless Motor  
 ROHS COMPLIANCE Yes  
 IP LEVEL IP21 (Special IP Rating On Request)

\* FAN IS FOR HORIZONTAL USE ONLY \*

# 43mm

43mm

## DIMENSION

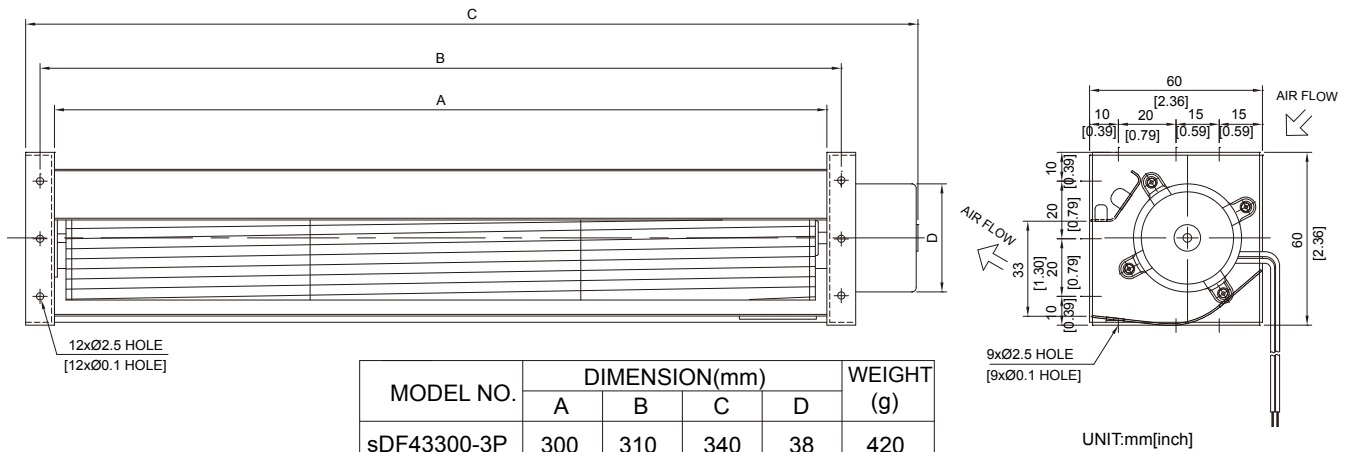

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A)@ 1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
sDF43300V24HB-3P	24	0.33	7.92	2500	0.075	1.9	88.34	2.5	37
sDF43360V24HB-3P	24	0.35	8.4	2400	0.063	1.6	98.94	2.8	37

## AIR PERFORMANCE

