




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

\* FAN IS FOR HORIZONTAL USE ONLY \*

# 60mm

60 mm

## DIMENSION

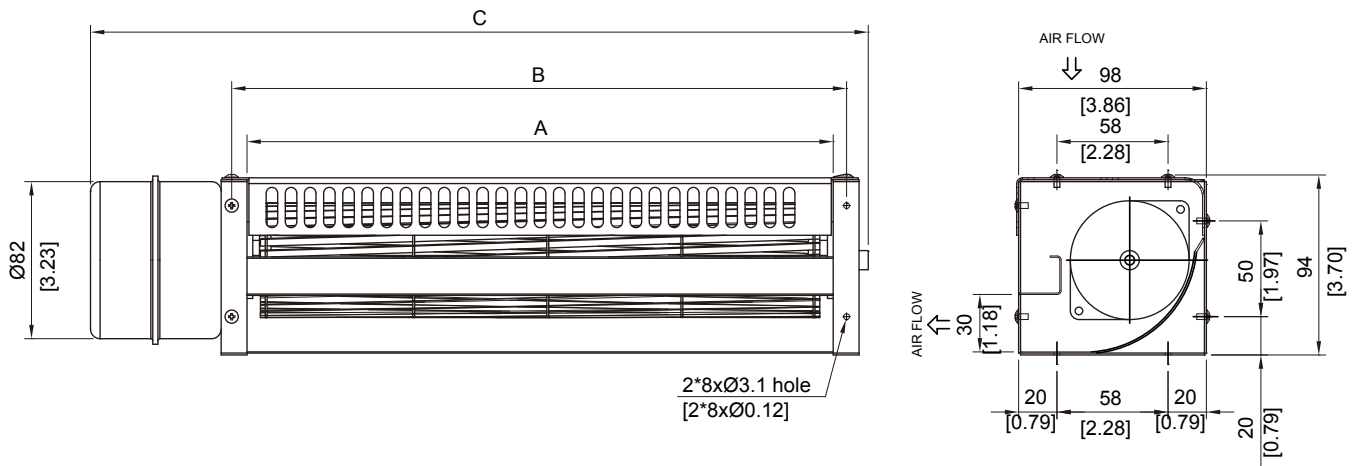

MODEL NO.	DIMENSION(mm)			WEIGHT (kg)
	A	B	C	
sDFB60306V24HBL-3P	306	321	406	1.4
sDFB60306V48HBL-3P	306	321	406	1.4
sDFB60360V48HBL-3P	368	383	469	1.6
sDFB60406V48HBL-3P	406	444	530	1.8

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A)@ 1M
					inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
sDFB60306V24HBL-3P	24	2.3	55.20	3500	0.394	10.0	265.02	7.5	62
sDFB60306V48HBL-3P	48	1.0	48.00	3500	0.394	10.0	265.02	7.5	62
sDFB60368V48HBL-3P	48	1.1	52.80	3300	0.339	8.6	289.75	8.2	60
sDFB60406V48HBL-3P	48	1.1	52.80	3150	0.319	8.1	328.62	9.3	60

## AIR PERFORMANCE

