


INFORMATION

- MOTOR:** Single phase induction capacitor motor, thermally protected
- HOUSING:** Die-cast aluminum, Painted black (AP)
or plated (AN)
- IMPELLER:** Glass reinforced thermoplastic, UL 94V-0
- BEARING:** Two-ball or sleeve available
- TERMINATION:** T-Terminal type or W-Lead wire type
- OPERATING TEMPERATURE:** Ball type -20°C~+70°C; Sleeve type -10°C~+55°C
- OPERATING VOLTAGE RANGE :** 103 VAC to 126 VAC for 115V Type
207 VAS to 253 VAC for 230V Type
- DIELECTRIC STRENGTH:** 1 min. at 1,500VAC, 50/60Hz
- INSULATION RESISTANCE:** 10M Ω min. @500 VDC
- LIFE EXPECTANCY:** Ball bearing 60,000 hours at 60°C;
Sleeve bearing 20,000 hours at 45°C
- WEIGHT:** 1.4 Kg (3.09 pound)

sA16062

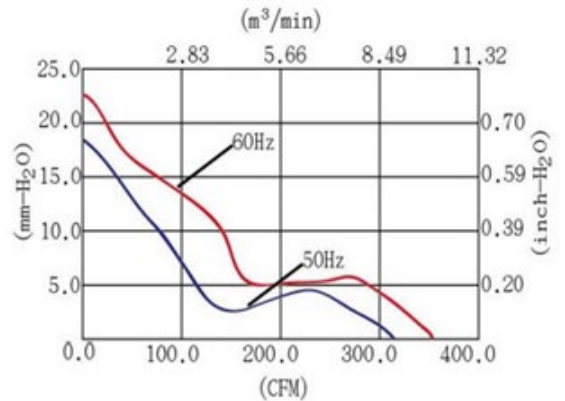

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA16062V1H	115	50/60	2800/3100	0.49/0.49	48/55	8.9/10	315/356	18.4/22.5	0.72/0.89	60/64
sA16062V2H	230	50/60	2800/3100	0.25/0.25	48/55	8.9/10	315/356	18.4/22.5	0.72/0.89	60/64