


INFORMATION

MOTOR:	Shaded pole, impedance protected or Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP) or plated (AN)
IMPELLER:	Glass reinforced thermoplastic, UL 94V-0
BEARING:	Two-ball or sleeve available
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type -20°C~+70°C; Sleeve type -10°C~+55°C
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
LIFE EXPECTANCY:	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
WEIGHT:	1.050 gm(2.32 pound)

sA17251-S

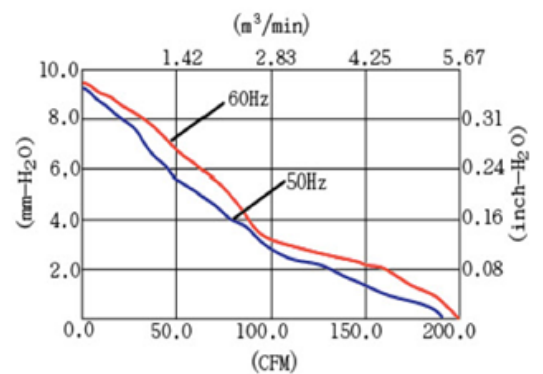

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA17251V1H-S	115	50/60	2600/2850	0.56/0.50	38/36	5.4/6.5	190/200	16/20	0.63/0.79	50
sA17251V1M-S	115	50/60	2400/2000	0.28/0.27	25/23	4.5/4.2	159/148	13/14	0.51/0.55	40
sA17251V1L-S	115	50/60	2170/1300	0.21/0.19	22/20	3.2/2.9	113/100	10/8	0.40/0.31	32
sA17251V2H-S	230	50/60	2600/2850	0.30/0.25	38/36	5.4/6.5	190/200	16/20	0.63/0.79	50
sA17251V2M-S	230	50/60	2400/2000	0.17/0.16	25/23	4.5/4.2	159/148	13/14	0.51/0.55	40
sA17251V2L-S	230	50/60	2170/1300	0.13/0.12	22/20	3.2/2.9	113/100	10/8	0.40/0.31	32