


GENERAL INFORMATION

MOTOR:	Shaded pole, impedance protected
HOUSING:	Die-cast aluminum, Painted black (AF)
IMPELLER:	Glass reinforced thermoplastic, UL 94V-0
BEARING:	Two-ball or sleeve available
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$; Sleeve type $-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
LIFE EXPECTANCY:	Ball bearing 60,000 hours at 60°C ; Sleeve bearing 20,000 hours at 45°C
WEIGHT:	290 gm(0.64 pound)

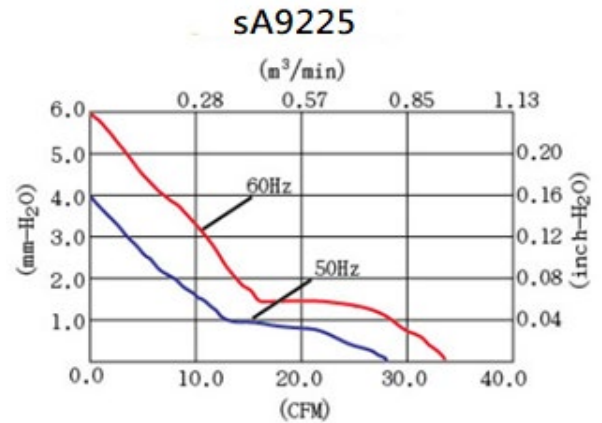

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA9225V1H	115	50/60	2400/3000	0.18/0.16	15/13	0.79/0.96	28/34	4.0/6.0	0.16/0.24	31/39
sA9225V1M	115	50/60	2100/2300	0.09/0.08	10/9	0.65/0.76	23/27	2.7/3.1	0.11/0.12	28/31
sA0225V1L	115	50/60	1700/1750	0.07/0.06	7/6	0.51/0.54	18/19	1.4 /1.5	0.05/0.06	26/27
sA9225V2H	230	50/60	2400/2900	0.08/0.07	15/13	0.79/0.96	28/34	4.0/6.0	0.16/0.24	31/38
sA9225V2M	230	50/60	2100/2350	0.06/0.05	10/9	0.65/0.76	23/27	2.7/3.1	0.11/0.12	28/32
sA9225V2L	230	50/60	1650/1850	0.05/0.04	7/6	0.51/0.54	18/19	1.4 /1.5	0.05/0.06	21/23