


GENERAL INFORMATION

MOTOR:	Shaded pole, impedance protected
HOUSING:	Die-cast aluminum, Painted black (AF)
IMPELLER:	Glass reinforced thermoplastic, UL 94V-0
BEARING:	Two-ball or sleeve available
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type -20°C~+70°C; Sleeve type -10°C~+55°C
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
LIFE EXPECTANCY:	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
WEIGHT:	450 gm(0.99 pound)

sA9238

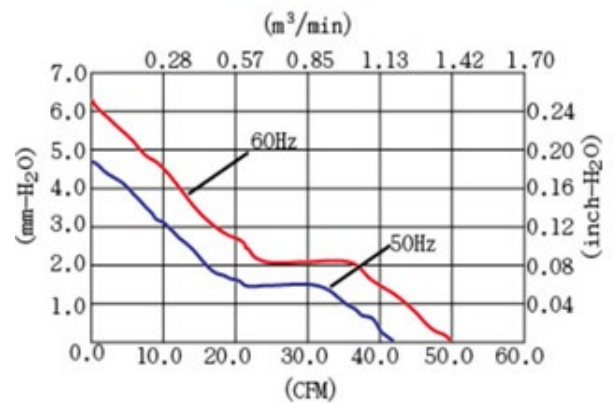

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m³/min	CFM	mm-H2O	inch-H2O	
sA9238V1H	115	50/60	2700/3200	0.12/0.11	14/12	1.19/1.42	42/50	4.7/6.3	0.19/0.25	34/39
sA9238V1M	115	50/60	2400/2550	0.07/0.06	11/9	1.16/1.25	41/44	4.1/4.2	0.16/0.17	32/35
sA9238V1L	115	50/60	2200/1950	0.05/0.04	7/5	1.08/1.02	38/36	3.3/2.4	0.13/0.09	30/27
sA9238V2H	230	50/60	2600/3050	0.06/0.05	14/12	1.19/1.42	42/50	4.7/6.3	0.19/0.25	35/40
sA9238V2M	230	50/60	2400/2550	0.05/0.04	11/9	1.16/1.25	41/44	4.1/4.2	0.16/0.17	34/36