

sAFC

150

Ø150mm(Ø5.91")



HOUSING Metal/Aluminum
IMPELLER Aluminum, Ø150mm
BEARING Ball
INSULATION Class A
OPERATING TEMPERATURE 0°C to + 45°C
OPERATING VOLTAGE RANGE 85 VAC to 125 VAC for 115V Type
 185 VAS to 245 VAC for 230V Type
DIELECTRIC STRENGTH 1,500 VAC for 1 second
INSULATION RESISTANCE 10M Ω min. @500 VDC
SAFETY Thermally Protected
MOTOR TYPE Capacitor Motor
ROHS COMPLIANCE Yes
IP LEVEL IP21 (Special IP Rating On Request)


* FAN IS FOR HORIZONTAL USE ONLY *

150

mm

100 mm

DIMENSION

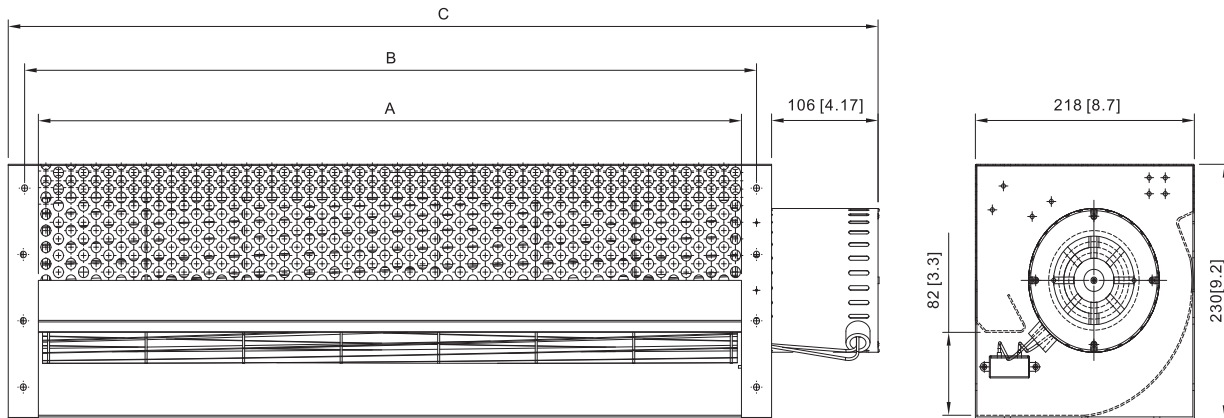

MODEL NO.	DIMENSION(mm)			WEIGHT (kg)
	A	B	C	
sAFC150700V2H	700	730	866	13.6
sAFC1501000V2H	1000	1030	1166	15.8

UNIT:mm[inch]

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @ 1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
sAFC150700V2H	220	50/60	1.2/1.1	156/210	950/1150	0.20/0.28	5.0/7.2	1168/1274	33/36	59/63
sAFC1501000V2H	220	50/60	1.3/1.3	190/265	900/1100	0.20/0.27	5.0/6.9	1593/1770	45/50	59/63

AIR PERFORMANCE

