

# sAFC 60



Ø60mm(Ø2.36")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	0°C to + 45°C
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAS to 245 VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
MOTOR TYPE	Capacitor Motor
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

\* FAN IS FOR HORIZONTAL USE ONLY \*

# 60 mm

60 mm

## DIMENSION

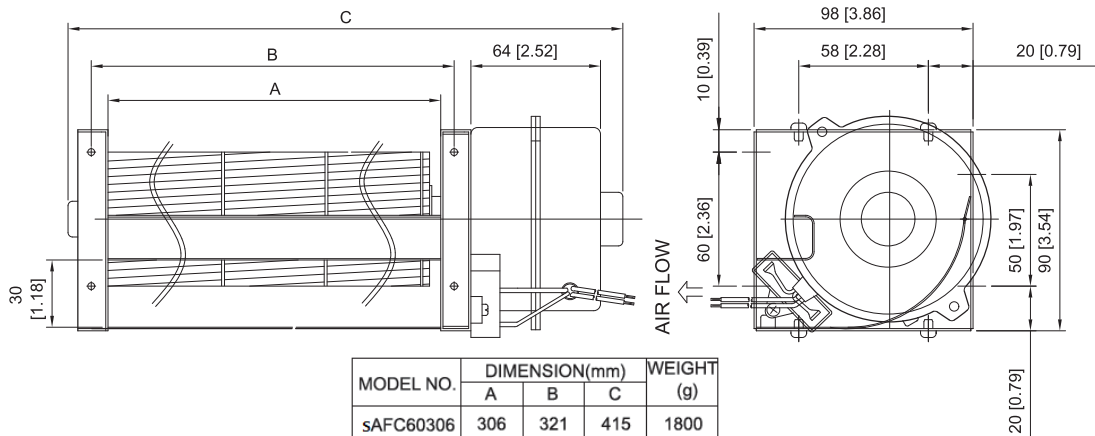

MODEL NO.	DIMENSION(mm)			WEIGHT (g)
	A	B	C	
sAFC60306	306	321	415	1800
sAFC60368	368	383	477	1850
sAFC60429	429	444	538	1930

UNIT:mm[inch]

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @ 1M
						inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
sAFC60306V1H	120	60	0.33	39	2900	0.31	7.8	205	5.8	55
sAFC60306V2H	230	50	0.15	31	2600	0.20	5.0	183	5.2	50
sAFC60368V1H	120	60	0.35	42	2600	0.26	6.7	240	6.8	54
sAFC60368V2H	230	50	0.16	34	2500	0.21	5.3	223	6.3	53
sAFC60429V1H	120	60	0.39	47	2600	0.23	5.9	267	7.5	54
sAFC60429V2H	230	50	0.17	36	2500	0.17	4.4	252	7.1	53

## AIR PERFORMANCE

