



# Item# SML222030 Specifications

Category: Pendant

Fixture Dimension: D30" x H30"- 108"

Wire/Chain Length: 10ft.(3m) / 6.5ft.(2m)

Fixture Weight: 10.45Lbs. (4.75Kg)

Fixture Finish: Satin Steel

Bulb: 6x60W E26 Base - NOT INCLUDED

Maximum Wattage: 60W

Voltage: 120V

Approved Location: Dry Location

Safety Certification: CETL




### **Wire Connections**

#### **ATTENTION:**

FIXTURE INSTALLATION MUST BE DONE BY A LICENSED ELECTRICIAN

SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER

USE ONLY THE SPECIFIED BULBS & DON'T EXCEED THE MAXIMUM WATTAGE

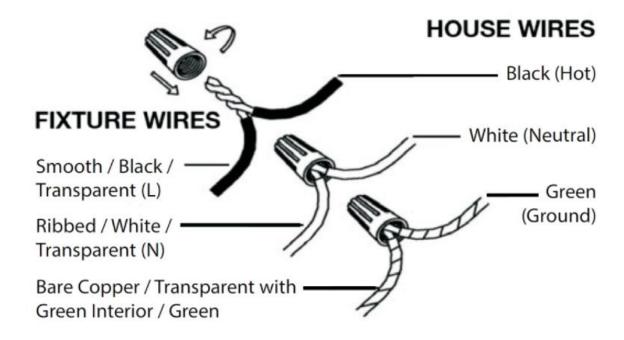


Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into outlet box.



## Assembly Instructions Item# SML222030

#### Parts List:

- 1. Fixture Assembly / 3 ring / Center Tube
- 2. Canopy / Bracket / Upper Loop with Collar
- 3. Chain
- 4. Wire Nuts x 3 / Mounting Screws x 2 / Spacer x 4
- 5. Instruction Manual

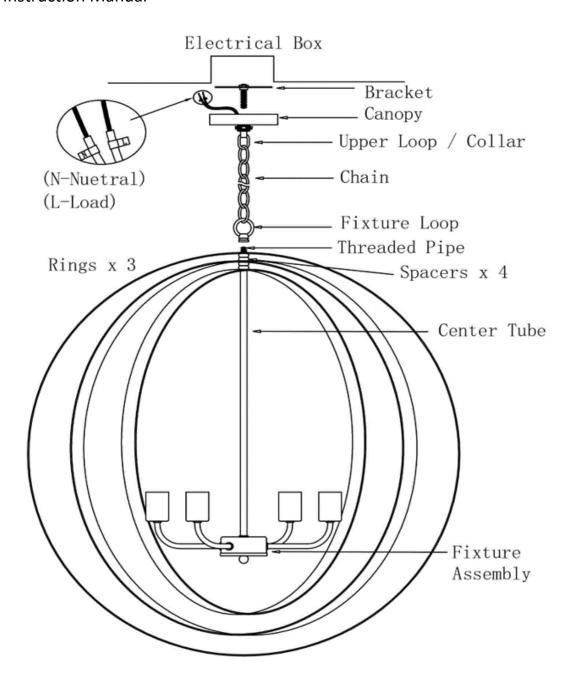



- 1. Unpack and check to ensure you have all parts as per list on previous page.
- 2. Feed supply /ground wires through center tube and thread tube onto fixture assembly.
- 3. Add rings one at a time starting with smallest ring first. 2 x spacing collars are added between the small and medium ring and the medium and large ring. Use fixture loop to secure all rings together. Hand tight only.
- 4. Attach desired amount of chain to fixture loop. The supply and ground wires are fed through chain. Feed chain and supply wire through canopy collar and canopy. Slide collar and canopy down chain. Attach upper loop assembly with mounting bracket to chain.
- 5. Attach mounting bracket to electrical box with screws provided.
- 6. Connect the ground wire(Bare copper) to grounding screw in electrical box.

  Use wire nuts provided to connect the Neutral (N) to white wire in box.

  Connect the Load wire (L) to black wire in electrical box. Ensure all connections are secure and tuck wires into electrical box
- 7. Slide canopy and canopy collar up the chain and secure canopy in place.

  Ensure no wires are pinched between edge of canopy and ceiling.
- 8. Install the bulbs. Bulbs are not included. **DO NOT** EXCEED THE MAXIMUM WATTAGE.
- 9. Adjust rings as desired for final look.