SUMMIT

BIM26



25.5" x 14.88" x 16.75" (H x W x D)

Built-In undercounter manual defrost icemaker with a stainless steel door and a black cabinet; no drain required

Highlights:

Produces 15 lbs of crescent-shaped ice and stores up to 12 lbs

Convenient drain-free design allows more flexibility in positioning the unit

Specifically designed for use in kitchen islands, home bars, break rooms, health offices, RVs, and even boat kitchens

Product Features:

| No-Drain 15" Wide Icemaker | Built-in or undercounter capable icemaker designed for kitchen islands, home bars, break rooms, health offices, RVs, and even boat kitchens. |
|----------------------------|--|
| Built-In capable | Make the best use of space by installing your icemaker under the counter |
| Large capacity | Produces 15 lbs of crescent-shaped ice and stores up to 12 lbs |
| Drain-free design | Convenient design allows more flexibility in positioning the unit |
| Manual defrost | Static cooling system helps to keep ice frozen for longer periods of time compared to other systems |
| Reversible door | User-reversible door swing for flexible placement |
| Sealed back | Space-saving design with easier cleanability |
| Standard water hookup | Operates with a standard 1/4" OD water supply line |
| Modern handle | Horizontally mounted towel bar style handle in stainless steel |


 \checkmark



SUMMIT

BIM26 Specifications:

| Overview | |
|--|---|
| Height of Cabinet | 25.0" (64 cm) |
| Height to Hinge Cap | 25.5" (65 cm) |
| Width | 14.88" (38 cm) |
| Width with Door Open | 15.13" (38 cm) |
| Depth | 16.75" (43 cm) |
| Depth with door at 90° | 32.25" (82 cm) |
| Defrost Type | Manual |
| Door | Stainless Steel |
| Cabinet | Black |
| US Electrical Safety | ETL |
| Canadian Electrical Safety | ETL-C |
| Amps | 1.2 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 50.0 lbs. (23 kg) |
| Shipping Weight | 61.0 lbs. (28 kg) |
| Parts & Labor Warranty | 1 Year |
| Compressor Warranty | 5 Years |
| UPC | 761101106601 |
| Icemaker | |
| Door Swing | RHD |
| Reversible | Yes |
| Height Adjustable | No |
| | |
| Drain Required | Yes |
| Drain Required Daily Ice Production | Yes 15.0 lbs. (7 kg) |
| · | |
| Daily Ice Production | 15.0 lbs. (7 kg) |
| Daily Ice Production Ice Storage Capacity | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) |
| Daily Ice Production Ice Storage Capacity Ice Shape | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube Sizes | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" 1 |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube Sizes Refrigerant Type | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" 1 R600a |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube Sizes Refrigerant Type Refrigerant Amount | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" 1 R600a 1.69 oz. |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube Sizes Refrigerant Type Refrigerant Amount High Side PSI | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" 1 R600a 1.69 oz. 120.0 |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube Sizes Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" 1 R600a 1.69 oz. 120.0 55.0 |
| Daily Ice Production Ice Storage Capacity Ice Shape Size of Cube Number of Ice Cube Sizes Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Interior Height | 15.0 lbs. (7 kg) 12.0 lbs. (5 kg) Crescent 7/8" x 7/8" x 2- 3/8" 1 R600a 1.69 oz. 120.0 55.0 12.25" (31 cm) |

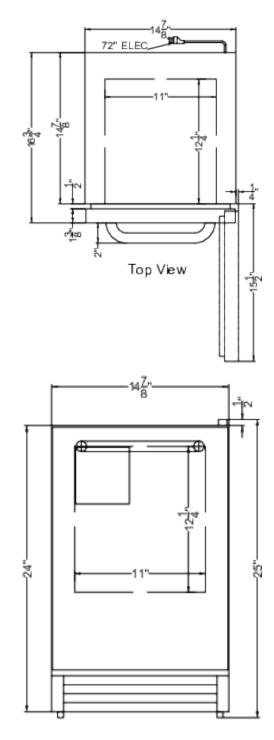

Front View

