




Unique Products • Innovative Solutions

# Flexbar Smartphone Borescope Adapter

## Direct Mount- No Expensive Coupler Needed

### Features:

- No need for large monitors
- Reduce Eye fatigue
- Capture Images
- Capture Still shots

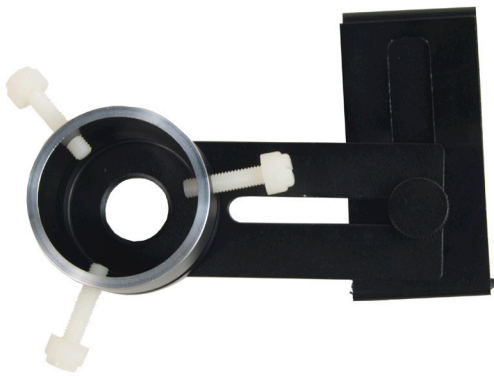

Attaches to most any Smartphone. This innovative solution allows you to utilize all of your hi-tech camera features to display and capture video images from your borescope.

Recommended for use with all 156 Series Flexbar rigid borescopes and works with many B-Style eyepiece borescopes. (*See back page*)

Allows choice of illumination handles (sold separately)

**Model No. 15686, Flexbar Smartphone Borescope Adapter.**



*Distributed By:*

FLEXBAR MACHINE CORPORATION  
250 GIBBS ROAD • ISLANDIA, NY 11749  
800-879-7575 • 631-582-8440  
www.flexbar.com • sales@flexbar.com  
© 2015 Flexbar Machine Corporation, Islandia, NY USA





# FLEXBAR SHARP-VIEW™ RIGID BORESCOPIES & MICROBORESCOPIES

Featuring Superb Quality Optics Which Provide Clear, Bright Images For Any Standard Industrial Application.


## IDEAL FOR USE WITH FLEXBAR SMARTPHONE BORESCOPE ADAPTER



Shown Above: No. 15673 with  
Portable LED Light Handle  
No. 15680(not included)



Model No. 15670



Shown Above: No. 15678, 17" Long Model with Snap-on rotatable  
90° viewing mirror tube included.

Standard scopes available in diameters from 1.5mm (.060") up to 5.5mm (.220"), lengths up to 17".

### MAIN FEATURES:

- Probe tubing is stainless steel for extra durability.
- Eyepiece is standard 32mm...accepts Flexbar C-mount coupler No. 13285 for video system usage.
- Integral cool fiberoptic lighting provides bright and even lighting.
- Wide angle field of view for direct and lateral viewing.
- Light guide post connects with Flexbar light guide (No. 13283) for use with Flexbar Lightsource or optional Flexbar portable light handles

### ORDERING:

Model No.	Diameter	Shaft Length	Viewing Angle	Field of View
15670	1.2mm (.047")	4.75" (120mm)	0°	Standard (45°)
15671	2.7mm (.106")	7" (175mm)	0°	Standard (45°)
15672	3mm (.118")	7" (175mm)	30°	Standard (45°)
15673	4mm (.160")	7" (175mm)	0°	Standard (45°)
15674	4mm (.160")	7" (175mm)	0°	Wide Angle (70°)
15679	4mm (.160")	7" (175mm)	70°	Standard (45°)
15675	4mm (.160")	7" (175mm)	90°	Standard (45°)
15676	4mm (.160")	12" (300mm)	0°	Standard (45°)
15677	4mm (.160")	12" (300mm)	70°	Standard (45°)
*15678	4mm (.160")	17" (425mm)	0° & 90°	Standard (45°)
15683	8mm (.315")	7" (175mm)	70°	Standard (45°)
15684	8mm (.315")	7" (175mm)	90°	Standard (45°)

\* Model No. 15678 includes snap-on rotatable 90° viewing mirror tube accessory.

### LIGHT HANDLES

Model No. 15738,  
Borescope Light  
Handle with Adapter.



Model No. 15680,  
Economy LED Portable  
Light Handle.