



FLEXBAR TRIGA-BORE™

SPECIAL APPLICATION GAGE HEADS

For Use With Flexbar Triga-Bore & True-Bore Gage Handles



Quickly & accurately measure most internal threads, grooves, splines, slots and taper bores. Available in measuring ranges: diameters from 10mm up to 200mm.

SPECIAL APPLICATION MEASURING HEADS PRODUCED BY FLEXBAR PER CUSTOMER'S REQUIREMENTS:






I. Groove /"O" Ring Groove Measurement

Precise groove measurements are made easily and accurately. Application groove requirements for groove width minimum is .060" (1.5mm). Groove depth may not exceed half the travel range of the True-Bore head.

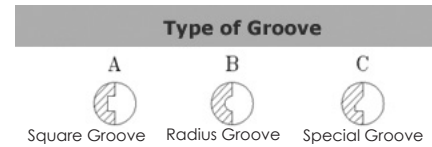




II. Spherical or Deep Bore Measurement

Spherical shaped heads are useful in deep bores where holding the bore gage straight in the bore is difficult, the spherical shape allows only a single contact point per anvil on the bore wall. All special shaped head applications can be reviewed upon request.

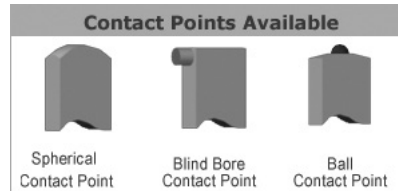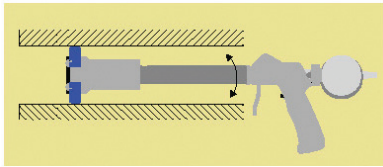

III. Thread & Ball Screw Thread Measurement

Available in two or three point thread measurement heads according to application.

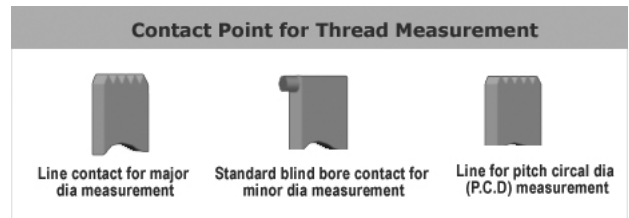




IV. Additional Special Applications include:

Spline Measurement

Slot Measurement

Taper Measurement



Complete information and On-Line Special Applications Quotation Requests available at www.flexbar.com or by phone.