




FLEXBAR SHARP-VIEW™ RIGID BORESCOPIES & MICROBORESCOPIES

Featuring Superb Quality Optics Which Provide Clear, Bright Images For
Any Standard Industrial Application.

IDEAL FOR USE WITH FLEXBAR VIDEO BORESCOPE SYSTEMS

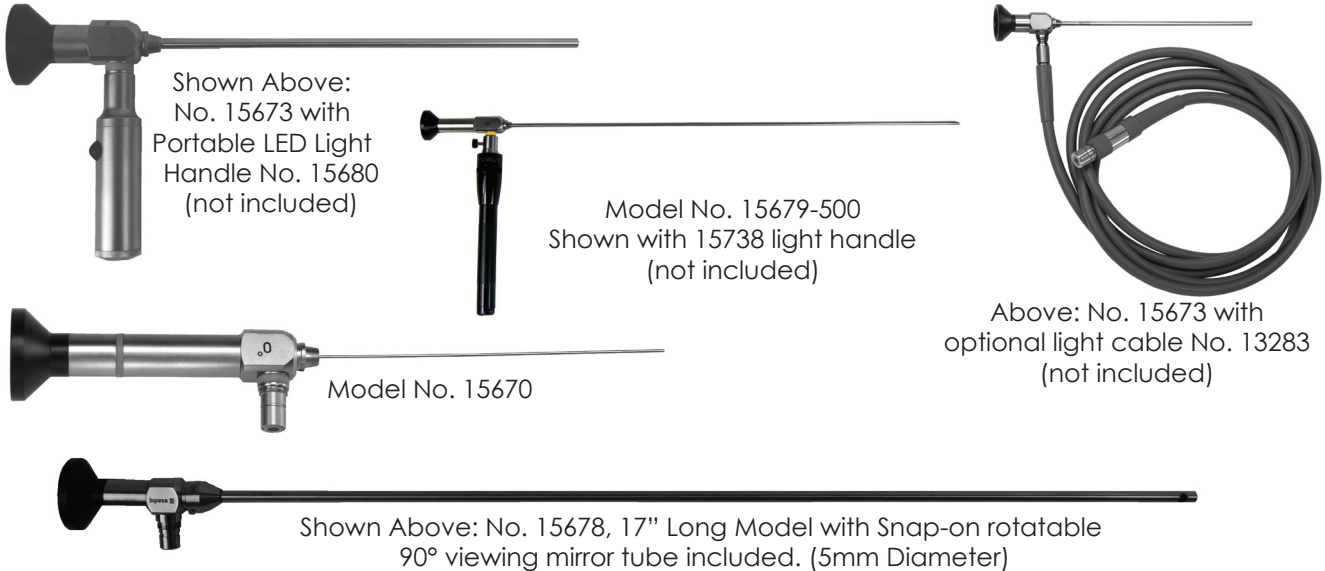

MAIN FEATURES:

- Probe tubing is stainless steel for extra durability.
- Eyepiece is standard 32mm. Use Flexbar C-mount coupler No. 13285 for video system usage.
- Integral cool fiberoptic lighting provides bright and even lighting.

MODEL NO.	DIAMETER	SHAFT LENGTH	VIEWING ANGLE	FIELD OF VIEW
15670	1.2mm (.047")	4.75" (120mm)	0°	Standard (45°)
15671	2.7mm (.106")	7" (175mm)	0°	Standard (45°)
15672	3mm (.118")	7" (175mm)	30°	Standard (45°)
15673	4mm (.160")	7" (175mm)	0°	Standard (45°)
15674	4mm (.160")	7" (175mm)	0°	Wide Angle (70°)
15679	4mm (.160")	7" (175mm)	70°	Standard (45°)
15675	4mm (.160")	7" (175mm)	90°	Standard (45°)
15676	4mm (.160")	12" (300mm)	0°	Standard (45°)
15676-90	4mm (.160")	12" (300mm)	90°	Standard (45°)
15677	4mm (.160")	12" (300mm)	70°	Standard (45°)
*15678	4mm (.160")	17" (425mm)	0° & 90°	Standard (45°)
15679-500	4mm (.160")	19.70" (500mm)	70°	Standard (45°)
15683	8mm (.315")	7" (175mm)	70°	Standard (45°)
15684	8mm (.315")	7" (175mm)	90°	Standard (45°)

* Model No. 15678 includes snap-on rotatable 90° viewing mirror tube accessory (5mm diameter).

See next page for available light handles, light cables, light sources, couplers and video camera systems.