



7" / 9" LED DRIVING LIGHT USER MANUAL



LF-DL7-LED5*2 / LF-DL9-LED5*2

Read and understand the warning and cautionary points and
installation instructions and keep this manual close at hand for reference.

V1.2

WARNING AND CAUTIONARY POINTS


- For your safety, read and understand this manual thoroughly before installing, operating the Lightfox driving light.
- Ensure you have a good understanding of automotive mechanical and electrical procedures and systems, and that you are proficient in installing this product before installation. ALWAYS refer to the vehicle's service manuals when performing equipment installations on your vehicle.
- Remove anything that could be damaged near both sides of the surface before drilling into a vehicle. Make sure to deburr all drilled holes and smooth all sharp edges. Otherwise, it could cause serious injury or death.
- Check if there is any damage before installation. Should there be any, consult Lightfox and DO NOT use this product.
- Installation of this light should NEVER block, impair or blind the driver's vision.
- Make sure the light is installed securely and all screws are tightened securely before driving.
- Please wear protective eyeglasses and insulating gloves when installing this product. Make sure you are not wearing any metallic items such as watches, bracelets, etc.
- Make sure there are no flames or corrosive chemicals nearby during installation or operation.
- Before servicing fuses or electrical systems, disconnect any power sources connected to your vehicle.
- NEVER switch the light on and off in short intervals, otherwise its lifespan will be shortened.
- DO NOT attempt to disassemble the light as this may result in potential damage to your light and will void the warranty.
- DO NOT use the light and its harness for any purpose other than automobile use.
- When the engine is not running, turn off the light. Or it may drain the battery.
- NEVER start work before the engine compartment is adequately cool. Make sure engine parts such as radiator, oil-cooler or turbo part are cool.
- DO NOT drill holes to the main body of the light. DO NOT apply adhesives or stickers to the light parts.
- NEVER modify the harness in any way. Or it may cause the light to overheat or short circuit. It may also cause the vehicle to catch fire.
- Make sure the headlight, wipers and horn are working normally after installation.
- This driving light is designed to operate from 9V-32V ONLY.
- ALWAYS keep the light out of children's reach.
- NEVER use a caustic or petroleum based cleaner to clean the driving light.
- Regularly check condition of the wiring and connections.
- Before connecting electrical wires, disconnect ground connection from battery (-) to avoid accidental short circuits.

WHAT'S INCLUDED


2 PC(s) Lightfox 7"/9" LED Driving Lights	4 PC(s) M8 Screws
2 PC(s) Clear Protective Covers	4 PC(s) M8 Washers
2 PC(s) Blackout Protective Covers	4 PC(s) M8 Spring Washers
6 PC(s) Color Rings (2xGrey; 2xYellow; 2xBlack)	4 PC(s) M8 Nuts
2 PC(s) Rubber Pads	2 PC(s) M12 Screws
3 PC(s) Wrenches	2 PC(s) M12 Washers
1 PC(s) User Manual	2 PC(s) M12 Spring Washers
	2 PC(s) M12 Nuts
	4 PC(s) M3 Screws

INSTALLATION INSTRUCTIONS


1. You'll need to unscrew both sides of the bracket before attaching screws to its bottom.

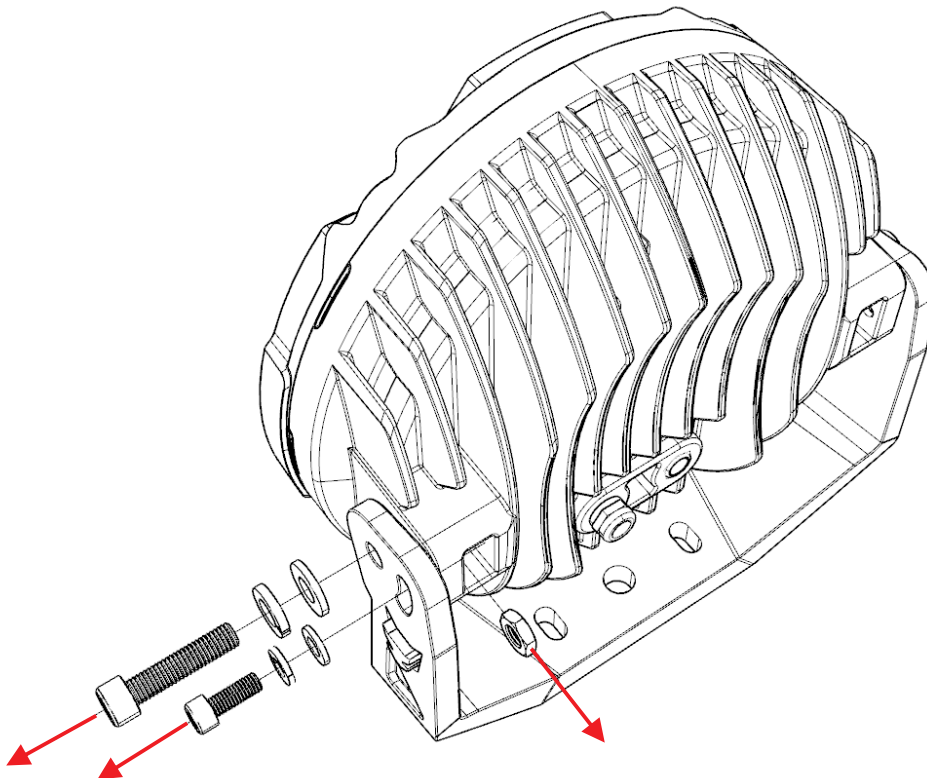


2. When mounting to the desired platform, the order of the hardware is as follows: Screw > Mounting Bracket > Rubber Pad > Mounting Platform > Washer > Spring Washer > Nut.

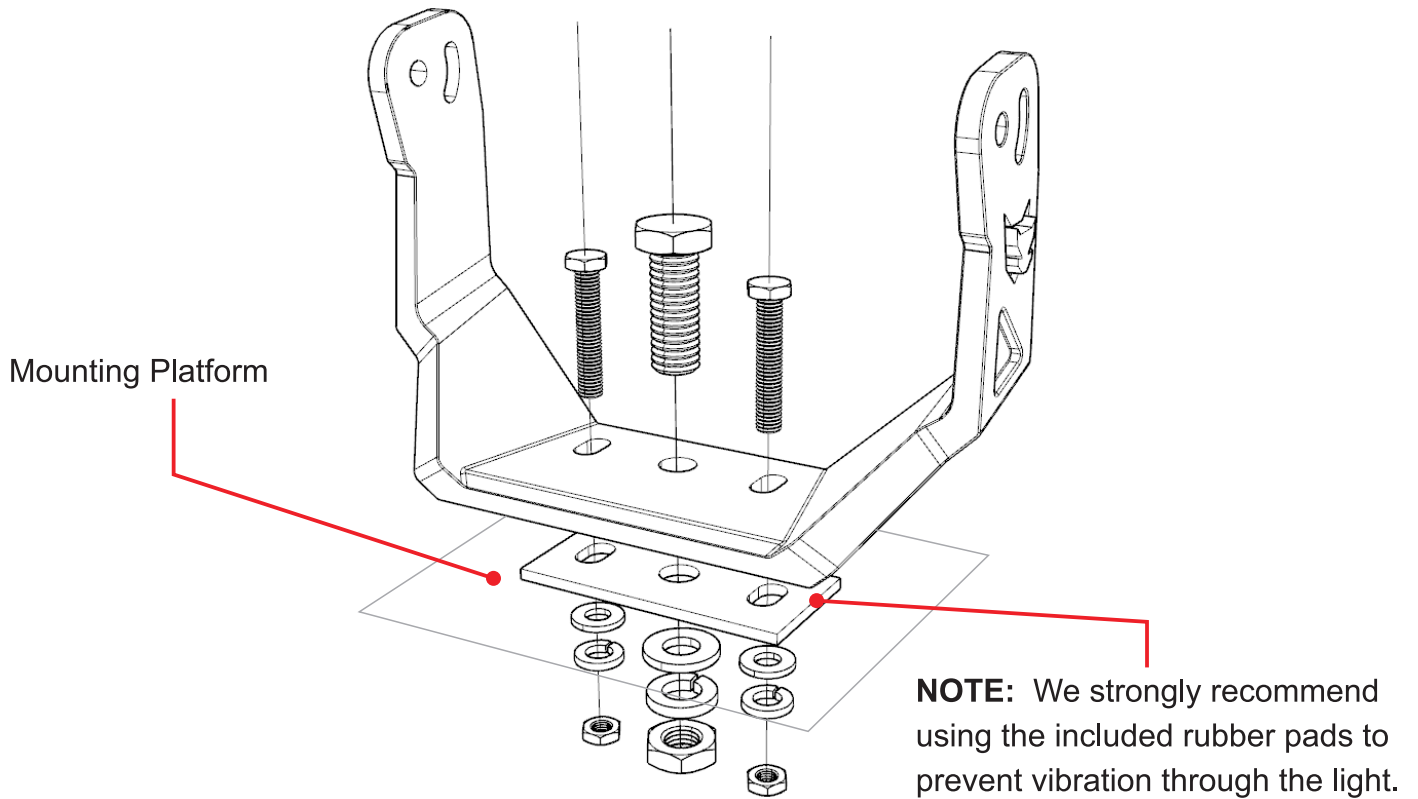

3. Then, screw both sides of the bracket in the order shown in the diagram below:
 M8 Screw > M8 Spring Washer > M8 Washer > Bracket > M8 Nut
 M6 Screw > M6 Spring Washer > M6 Washer > Bracket > Driving Light.

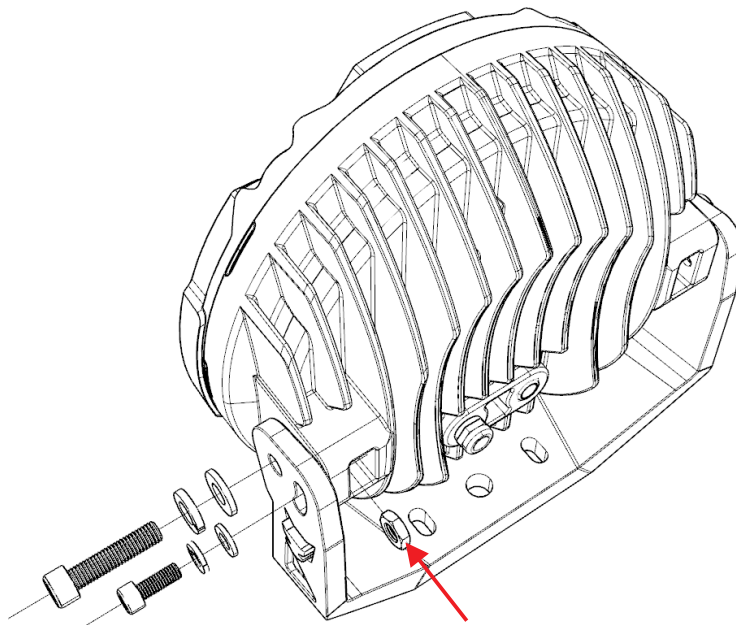

WIRING DIAGRAM

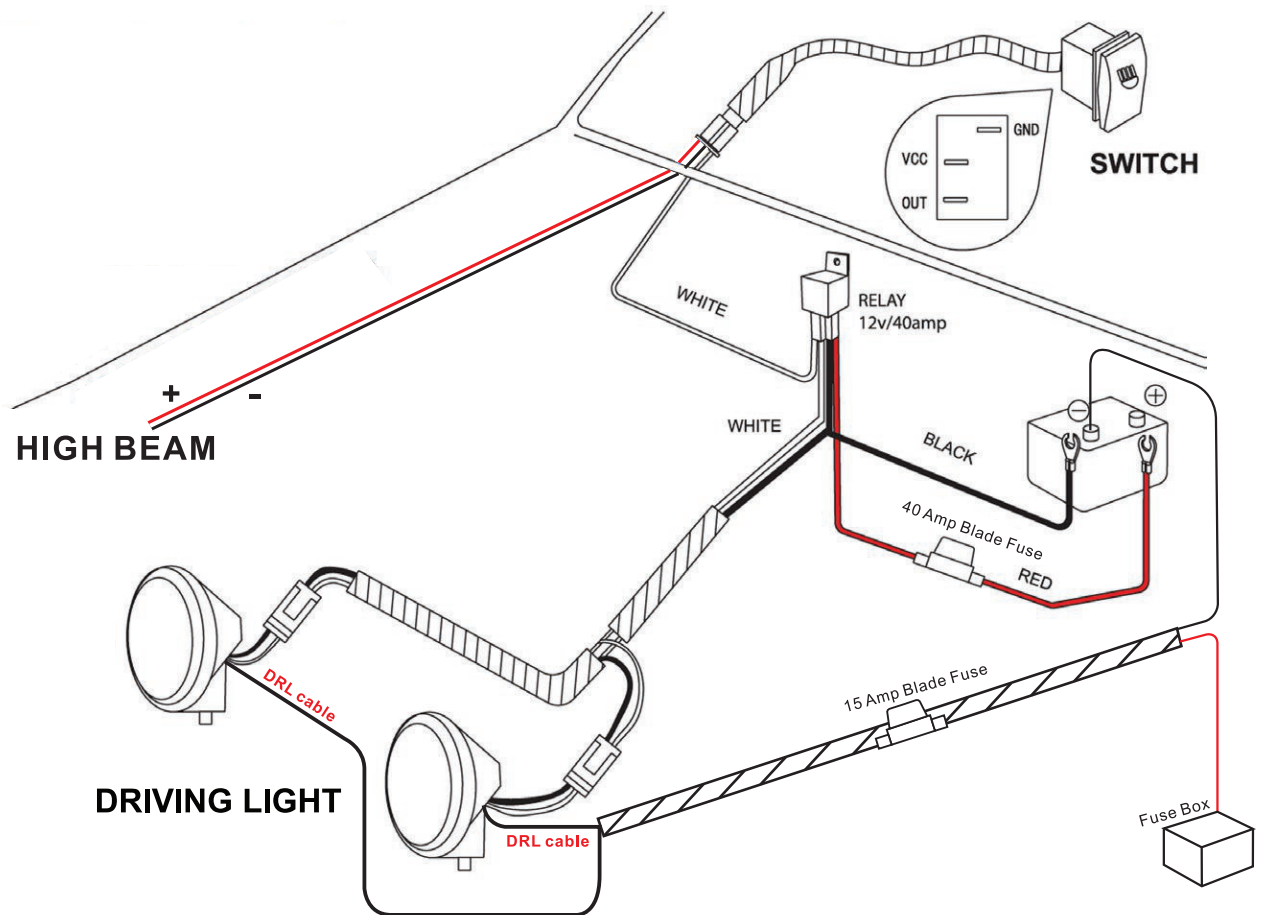

Warning! We recommend contacting your local dealership if you are unable to locate the accessory fuse slot in your car.



LIGHTFOX[®]

WARRANTY

Lightfox ("Manufacturer") warrants to the original buyer ("User") that its LED driving light sold hereunder shall be free from material defects in workmanship or materials and conform to Lightfox's specifications for this product under normal application, installation, use and maintenance conditions from the date sold and for the duration (the "Warranty Period") of 5 YEARS.

If it fails to operate during the limited warranty period due to defects in materials or workmanship, Lightfox will, at its option, replace it with the same or similar product, or issue a refund.

This limited warranty is provided by Lightfox and there are no other warranties, expressed or implied, except as required by law, including warranties of merchantability and fitness for a specific purpose, that are provided for herein, however all such implied warranties, if any, are limited to the duration of this specific limited product warranty. Oral statements or representations about the product do not constitute warranties.

THE WARRANTY DOES NOT COVER:

Defects caused by normal wear and tear, inadequate maintenance, transportation, storage or failure to observe installation or maintenance instructions set forth in the Lightfox's instructions. Damages to parts or products resulting from tampering, accident, abuse, misuse, negligence, unapproved modifications, fire or other hazards; improper operation; unauthorized repairs, submersion, theft or vehicle crash.

Damages whatsoever (including, without limitation, consequential damages, incidental damages, or damages for loss of use, loss of profits, loss of time, inconvenience, or other losses, etc) arising out of the misuse, or inability to use a Lightfox product.

CLAIMS:

No returns will be credited without an authorization. If a Lightfox product is suspected of being defective, you'll need to provide proof of purchase (e. g. a screenshot of the order) and a picture of the damaged goods in their entirety to sales@lightfox.com.au or the seller you purchased from for evaluation. Removal, installation, or reinstallation costs are not covered by this limited warranty.