


# RIM **MAXIMUM** PRESSURE RATING CHART

Tire Width (A)		Clincher rim internal width (B)						Rim maximum pressure rating (C)	
(mm)	(inch)	15 - 17.4mm	17.5 - 19.9mm	20.0 - 22.9mm	23.0 - 26.9mm	27.0 - 34.9mm	35.0-45.0mm	(bar)	(psi)
20	0.80	●						8.6	125
23	0.90	●	●					8.3	120
25	1.00	●	●					7.4	108
28	1.10	●	●	●				6.8	98
30	1.20	●	●	●				6.2	90
32	1.25	●	●	●				6.0	86
35	1.40	●	●	●				5.3	77
37	1.50		●	●	●			5.0	72
42	1.65		●	●	●			4.5	65
45	1.75		●	●	●			4.3	62
48	1.90		●	●	●	●		3.9	57
50	2.00		●	●	●	●		3.7	54
54	2.10		●	●	●	●		3.5	51
57	2.25			●	●	●	●	3.3	48
60	2.35			●	●	●	●	3.2	46
62	2.40			●	●	●	●	3.1	45
65	2.50				●	●	●	3.0	43
66	2.60					●	●	2.8	40
68	2.70					●	●	2.6	37
71	2.80						●	2.3	34
74	2.90						●	2.1	31
76	3.00						●	2.0	29

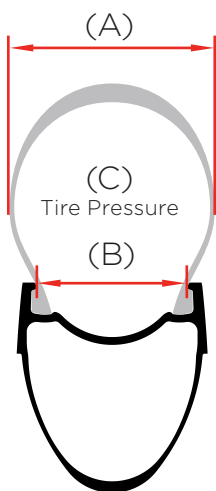

A. Refer to technical information on tires.

**EXAMPLE:** Road: 622 x 25 // MTB: 29 x 2.25

B. Refer to technical information Easton rims.

**EXAMPLE:** 622 x 19.5

B. For conventional tire systems

(tubetype, tubeless ready, Road Tubeless, UST).

The tire pressure must stay within the tire manufacturer's specified pressure, but never exceed the rim maximum pressure rating specified by Easton Cycling.