



POWERTECH
GENERATORS
SOLUTIONS FOR MOBILE APPLICATIONS



CD8000SI



LOW PROFILE DIESEL GENERATOR

- Low Speed Industrial Grade
- Compact and Under 19 inches Tall
- Isolated Cooling Flow
- Single Side Service
- 2 YR /3000 HR Limited Warranty
- Available in 50 or 60Hz
- Dimensions: 34.5"L x 24.63"W x 18.63"H

FEATURES

SPECIFICATIONS

- Prime Power Output: 8,000W
- Liquid-Cooled, 3 Cylinder, Diesel
- CARB and EPA Certified TIER 4
- Indirect Injection Type
- Brush-less Generator with Automatic Voltage Regulator
- ECU Electronic Controller
- Safety Shutdowns for High Temp and Low Oil Pressure
- Output Voltage: 120VAC/240VAC or Dedicated 120VAC
- Amperage: 66A @120VAC (33A @ 240VAC)
- Fuel Consumption: 0.8 GPH at Full Load and 0.4 GPH at Half Load
- Weight: 425 lbs

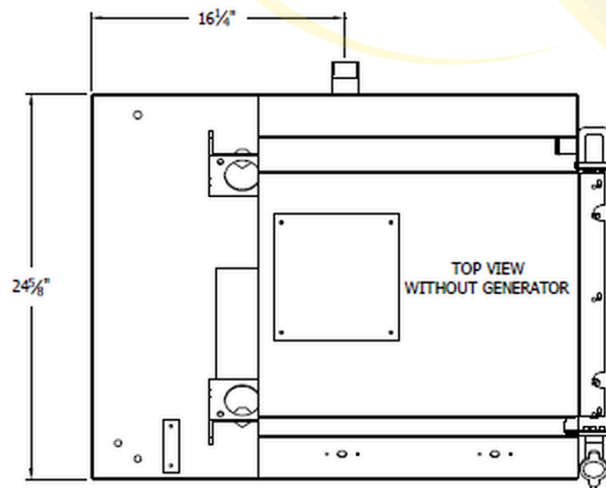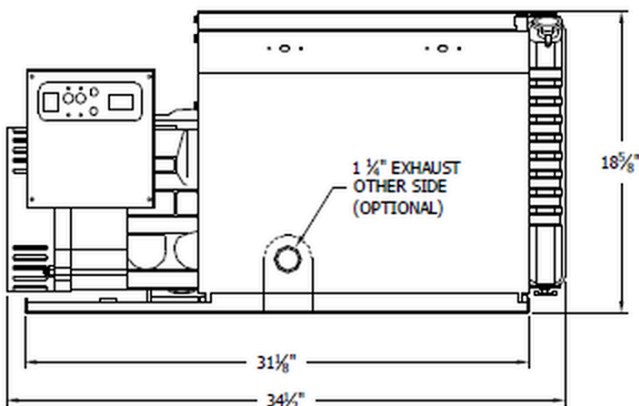

DIMENSIONS





BASE PAN DIMENSIONS

