



ITEM No. 2804-4

PURE LINE

PURE LINE 1000

1000 WATT 24 V (PSW)



APPLIANCES

RoHS
Compliant



Conforms to UL458 & CSA C22.2 #107.1 Standard
Conforms to UL1741 & CSA C22.2 #107.1 Standard

CE



PURE LINE

PURE LINE 1000

1000 WATT 24 V (PSW)



Note: Factory's dimensions are only of the aluminum part.
We need the total width, length, and height. *

SPECIFICATIONS

PURE LINE 1000


Item Number	3804-4
Size *	(L) 13.0 in. (W) 7 in. (H) 3 in.
Net Weight	6.0 lbs
Surface Finish	Painted Cool Grey 11 C/white
Cables Provided	6AWG 36 inches
Accessories	Remote capable, but NOT included
DC Input	22 - 30V
AC Output	127V, 1F-2H
Sine Wave	Pure Sine
Frequency	60Hz +- 0.1
True Rated Power	1000W
Surge Power	2000W
Low Battery (Voltage) Alarm	21.0V ± 0.5V
Low Battery (Voltage) Shutdown	20.0V ± 0.5V
Auto Restart After Low V Shutdown	Yes (24.0V ± 0.5V)
High Voltage Shutdown	33.0V ± 0.5V
Operating Temperature	32°- 104° F ±9° F (0°-40° C ±5° C)
Storage Temperature	-30° - 70° C
Maximun Efficiency	>90%
No Load Current	< 0.4A
Total Harmonic Distortion	< 3%
USB Port	2.1A, 5V ± 0.25V
AC sockets	2 North American (NEMA 5-15)
Reverse Polarity Protection	Yes
Fan Control	Load/temp control
Mounting Hardware	Yes
True Ground	Yes
GFCI	No
Power Factor	>0.85



PURE LINE

PURE LINE 1000

1000 WATT 24 V (PSW)

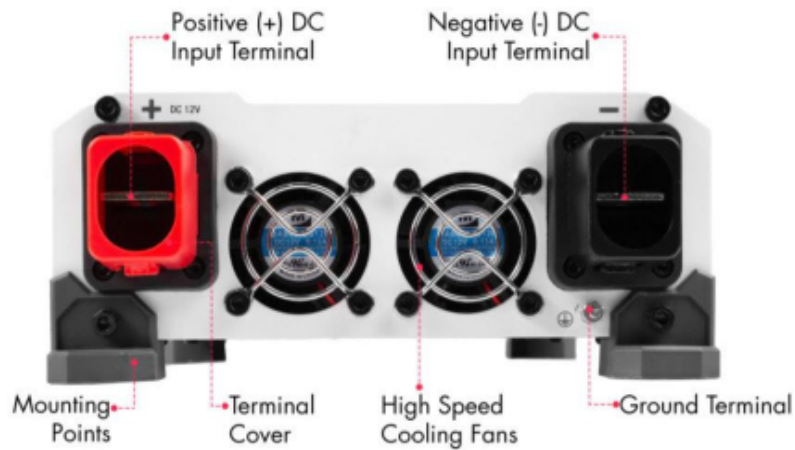

KEY FEATURES

UL certification 1741

Certified to CSA C22.2 No. 107.1

Conformal Coating

NTG bond

Ground Terminal

DC terminal safety covers

Ultra low profile

Leakage current protection

2 years limited warranty