


SIBERIA 437 LARCH WOOD HAMMOCK STAND



Thank you for purchasing the Siberia 437 Larch Wood hammock stand. We hope you will get years of enjoyment and relaxation from your new purchase. We appreciate your business.


Assembly Instructions

Before assembling your HAMMOCK, please familiarize yourself with the components and make sure you have everything listed below:

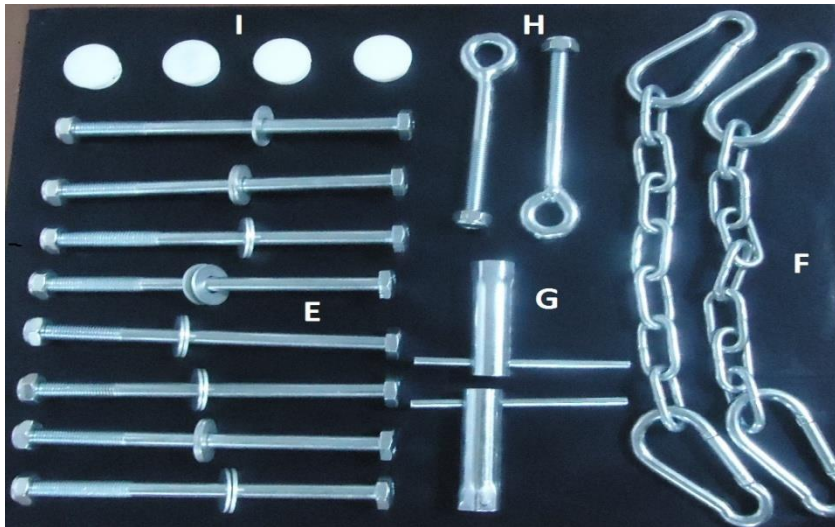

PART LIST:

Item	Description	QTY
A	Bottom Support Arches – with 2 pre-drilled holes on top (that attach to base) and 2 recessed holes on each end.	2
B	Base Stands – to support the entire hammock.	2
C	Top Support Arches – with 2 side holes and 1 top end hole.	2
D	NOT INCLUDED WITH THIS ITEM – ROPE BED FOR ILLUSTRATION ONLY	0
E	7” Hex Head Bolt -with washers and lock nuts. Use to attach top support to bottom support arches and base stroke bottom stands.	8
F	Chain with Spring Loaded Carabineer Type Hooks	2
G	Socket Wrench with Leverage Bar – for assembly. Use to tighten double treaded screws and hex bolts.	2
H	Eye Bolts – used to attach the chain to the frame.	2
I	Plastic Caps - to cover the counter sink	4

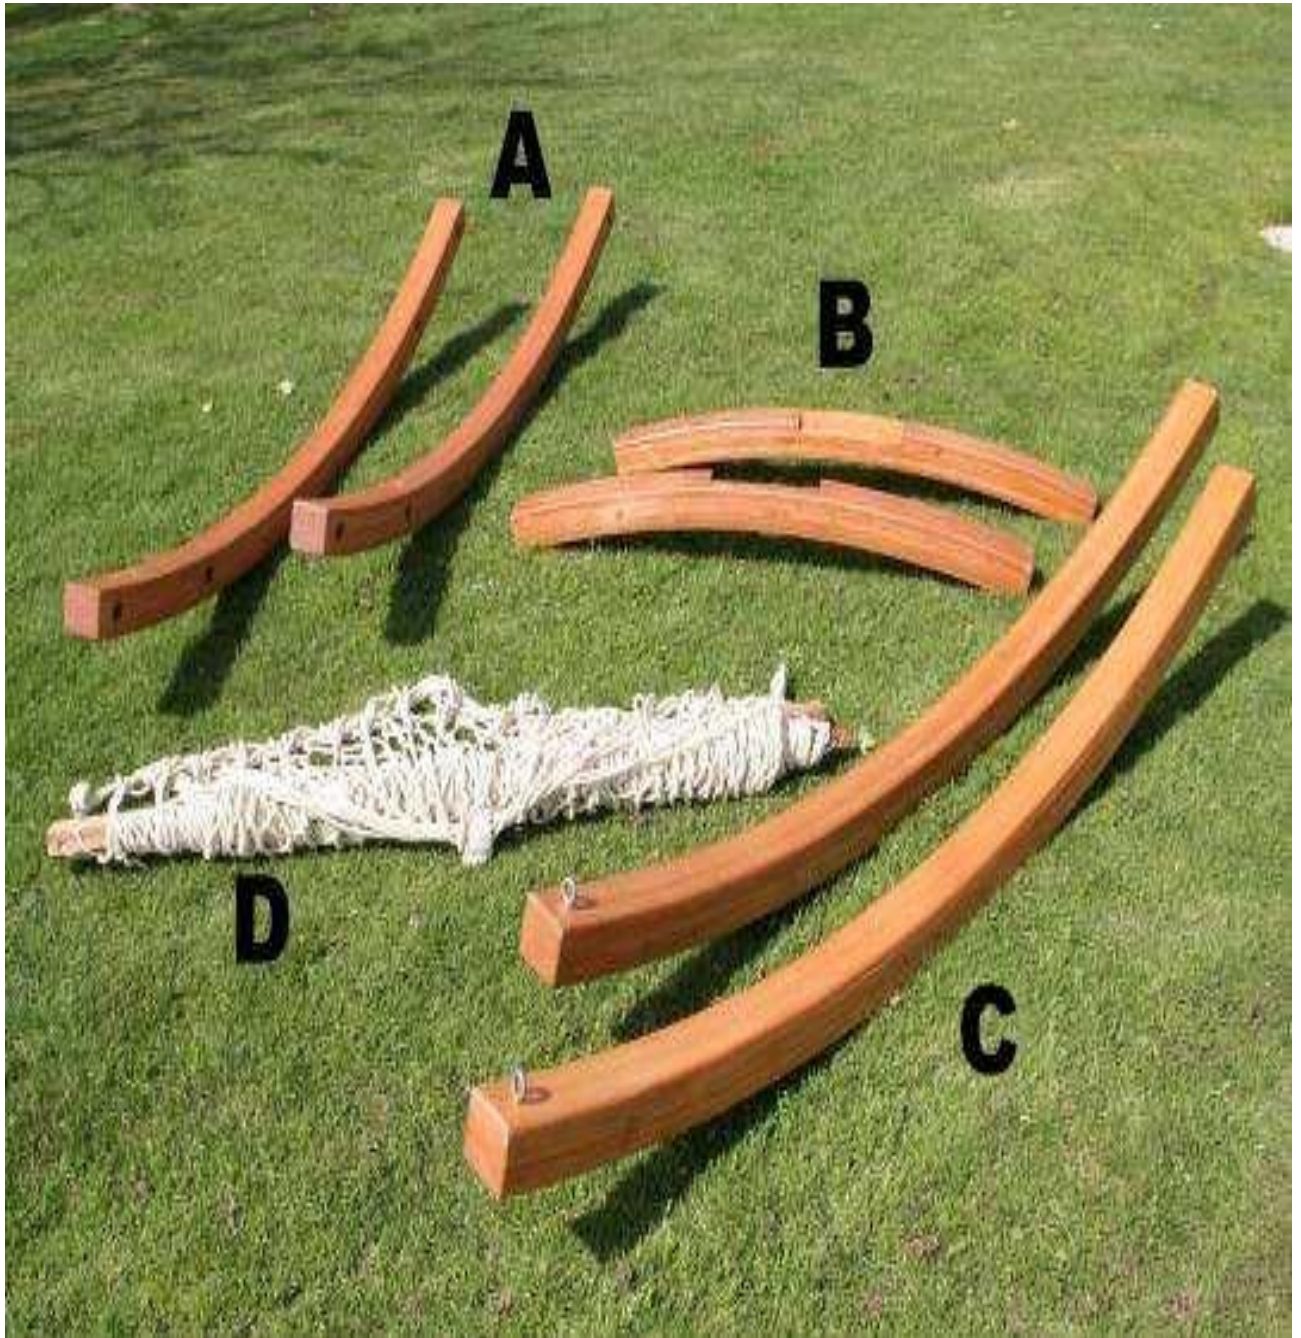

You might find it helpful to get someone to help you assemble your Hammock. Please read and understand all instructions before starting assembly.



Step 1: Place the 2 base stands(B) about 42" inches apart with the notched out sides facing each other. This will provide a stable base for your hammock.



Step 2: Using the 6" hex bolts, attach the base support arch(A) to the base stands(B). Note -Make sure that the recessed holes are facing out. This allows you to recess the locking nuts later.



Step 2b: Repeat Step 2 with the other base support arch. Again, note the recessed holes should face out.



Step 3: Attached the top support arch(C) using the 9.5” hex head bolt(E). Note – 1) It is easier to attach the top holes first, 2) the dilled hole should be on top with the recessed side in the back. Use the provided socket wrench to tighten the locking bolts.



Step 3b: Repeat step 3 on the other side to form the arch. Make sure to securely tighten all nuts and screws before use!



Step 4: Attach the eye bolts(I) using a washer, lock nut and socket wrench. Attach the chain(H) to the assembled frame using the spring loaded carabineer hook . Attach the hammock bed(D) to the chain(H) using the spring loaded carabineer hook. Adjust to desired tension and enjoy. • Note – it may be necessary to increase tension from time to time as your Hammock stretches.

!!!DISCLAIMER | WARNING!!!

**Please do not leave children unattended around this product.
Maximum weight limit, 350lbs. and subject to the weight
limitations of the hammock bed used in conjunction with this
hammock frame.**

**Not to be used by people unwilling or unable to take
responsibility for their actions.**

**This product, when assembled with a hammock bed, requires
good balance and coordination during use. Improper use
may result in serious injury.**

User assumes all risk when using this product.

Do not use under the influence of drugs or alcohol.

!!!USE AT YOUR OWN RISK!!!