




# INSTRUCTION MANUAL

CLOSED EYE BOLT FOR HAMMOCKS AND  
HANGING CHAIRS

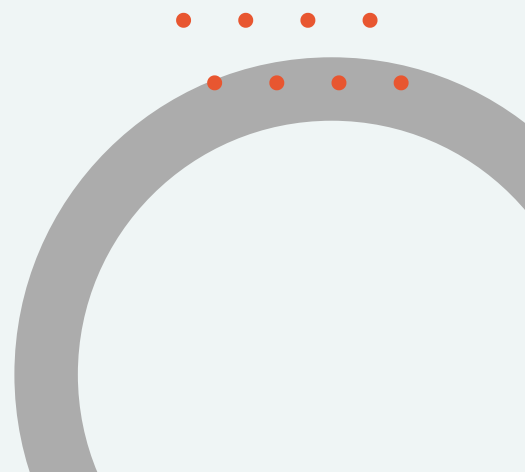

## CHOOSE INSTALLATION LOCATION

Select a suitable location for your eye bolt in the wood. Ensure it's anchored in a strong and structurally sound part of the wood surface. Consider the weight or load you plan to hang from the eye bolt.

## MARK THE INSTALLATION POINT:

Use a tape measure to mark the exact spot where you want to install the eye bolt. Mark it with a pencil or marker. Ensure it's level and in the right position.

## DRILL A PILOT HOLE:

Use a drill with a wood bit that is slightly smaller in diameter than the shank of the eye bolt (around 6mm is a common choice). Drill a pilot hole at the marked spot to a depth of about half the length of the eye bolt.

## SCREW IN THE EYE BOLT:

Insert the threaded end of the eye bolt into the pilot hole and turn it clockwise with a screwdriver or drill until the eye and plate are facing in the direction you want to hang your item. Be careful not to overtighten, as this could damage the wood.





## **ATTACH YOUR ITEM:**

Now, you can attach your hammock, planter, or other object to the eye bolt's eye or plate using the appropriate hardware or connections, such as carabiner clips or chains.

## **TIGHTEN SECURELY:**

Ensure the eye bolt is securely attached. Give it a gentle tug to check its stability.

# FOR MASONRY INSTALLATION:

## CHOOSE INSTALLATION LOCATION

Select a suitable location for your eye bolt on the masonry surface. Ensure it's anchored in a strong and structurally sound part of the masonry. Consider the weight or load you plan to hang from the eye bolt.

## MARK THE INSTALLATION POINT:

Use a tape measure to mark the exact spot where you want to install the eye bolt. Mark it with a pencil or marker. Ensure it's level and in the right position.

## DRILL A PILOT HOLE:

Use a drill with a masonry bit that matches the size of the rawl plug you will use. Drill a hole to the depth of the rawl plug.

## INSERT THE RAWL PLUG:

Insert the rawl plug into the hole.

## ATTACH THE EYE BOLT:

Attach the eye bolt by turning it clockwise into the rawl plug using a screwdriver or drill until the eye and plate are facing in the direction you want to hang your item.

## **TIGHTEN SECURELY:**

Ensure the eye bolt is securely attached but avoid overtightening, as this could weaken the masonry anchor.

## **ATTACH YOUR ITEM:**

Now, you can attach your hammock, planter, or other object to the eye bolt's eye or plate using the appropriate hardware or connections.

## **TEST FOR STABILITY:**

Give a gentle tug or test the load-bearing capacity of the installation to ensure it's secure.