5845 E. Terrace Ave. Fresno, CA - 93727 - PH: 888.352.5225 FAX: 559.348.9063 www.slamspecialties.com








## Features -

- 30% Thicker Sidewall than RE Models
- Over 1" More Stroke than RE Models
- Up to 40% Lighter than RE Models
- Lightest Bag in its Class
- Air ride assist for Trucks, SUVs & Trailers
- Load Leveling for Hauling or Towing.
- Adjustable ride control for Slammed or Skyed Vehicles
- Fast Response and control through
  (1) 1/2" NPT port.
- Vibration Isolation

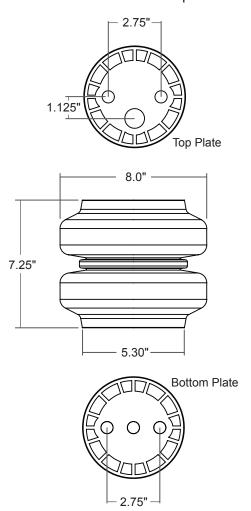

Model	SS-8
Diameter "0" PSI	8"
Diameter Max PSI	8"
Max PSI	250
Plate Material	Composite
Min Height	2.7"
Max Height	13"
Mounting (Top)	(2) 3/8" - 16
Mounting (Bottom)	(3) 3/8" - 16
Air Port NPT	(1) 1/2"
Internal Bump Stops	Integrated
Force to Collapse	30 lbs
Shipping Weight ea.	3.9 lbs
Replaces -	
Firestone	26
Goodyear	2B8