

# Programming a Fob Instructions

## Step 1:

Remove the 4 screws from the receiver's cover and unplug the antenna. (see pic Step 6)




## Step 2:

Remove receiver's cover.




## Step 3:

Power up the receiver (cat 5 cable must be plugged in)

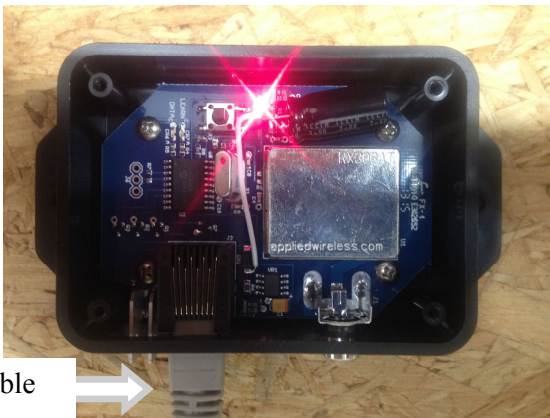

## Step 4:

Press the button inside the receiver until light comes on & release

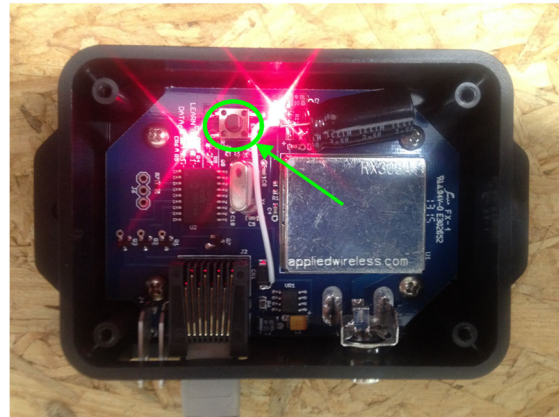

## Step 5:

Press and hold any button on the fob until the unit responds.

Repeat Step 4 & 5 for **new key fob 3 times** & repeat Step 4 & 5 for **each existing key fob once**.

\*\*\* Before proceeding to Step 6,  
Test all fobs and make sure they all work.



\* Instructional video also on web site

## Step 6:

Replace the cover on the receiver with the 4 screws you removed in step 1. Remount the receiver to the dock post with the cable and arrows pointing down and plug in the antenna.

