


LEVEL

RAMSEY CARD CASE KIT

1

KIT CONTAINS

Pre-Cut Leather
Instructions & Pattern

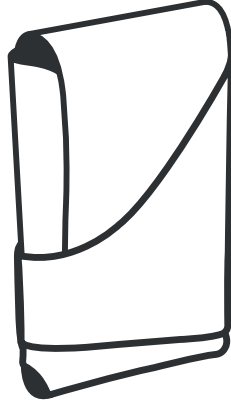

CAUTION

CHOKING HAZARD: Small parts. Keep out of reach of children.


PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING PROJECT.

NOTE: ALL STAINING, DYEING, AND TOOLING SHOULD
BE DONE PRIOR TO ASSEMBLY.

WHAT'S INCLUDED?

Main Body (A)

Not Shown:
Instructions & Pattern

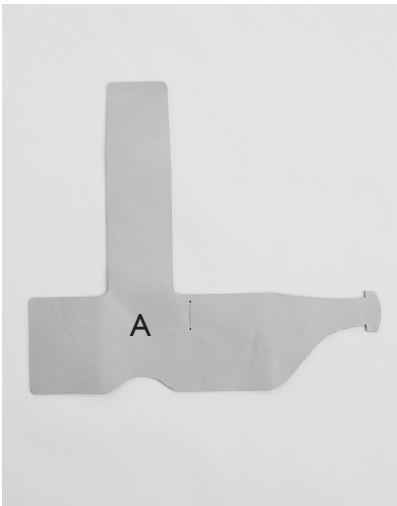

GLOSSARY:

FLESH SIDE: The underside of an animal's hide. On veg-tanned tooling leather, this is the rough side.

GRAIN SIDE: The hide's surface that had the hair of the animal. Typically used for carving and stamping.

OPTIONAL: FINISHING HANDLES

1. Before assembling, burnish Main Body (A) to desired finish. **See *Level Up Your Skills* starting on page 4 for detailed instructions on *How to Burnish Edges*.**

ASSEMBLING MAIN BODY

2. Place Main Body (A) on work surface flesh side facing up as shown. (Figure 1)

3. Take the long flap on the bottom and fold it up. Match it with the horizontal edge of the pattern piece. Crease well. (Figure 2)

4. Take the flap on the left and fold it over the long flap piece. Crease along the edge. (Figure 3)

5. Take the flap on the right side and fold it over the left flap. Crease along the edge. (Figure 4)

Figure 1




Figure 2




Figure 3




Figure 4



6. Wrap the remaining flap around the Main Body (A).
(Figures 5-6)
7. Take the rounded end and place it through the slit.
(Figure 7)
8. Close the top flap.

Figure 5




Figure 6





Figure 7



**CONGRATULATIONS, YOU'VE MADE A
RAMSEY CARD CASE!**



* Images are for construction purposes only.
Colors may vary.

LEVEL UP YOUR SKILLS WITH TANDY!

BURNISHING EDGES

NOTE: Burnish all individual pieces before assembling. Then burnish final product to desired results.

1. Rub emery board gently across the edges so that the leather is even and smooth. Dust off. (Figure 1)
2. Use a cotton swab to gently seal the edges with Eco-Flo® Gum Tragacanth Burnishing Agent. Let air dry. (Figure 2)
3. Burnish edges with a wood slicker. (Figure 3)
4. Repeat steps 2 and 3 until you reach desired outcome.

Figure 1



Figure 2



Figure 3



EST **tandy**[®] 1919
LEATHER

FOR MORE PATTERNS, PROJECTS, AND TIPS, VISIT [TANDYLEATHER.COM/BLOG](https://www.tandy-leather.com/blog).

Distributed by Tandy Leather 1900 SE Loop 820, Fort Worth, TX 76140
Made in the USA with global components.
©2022 Tandy Leather. All rights reserved.