

BURLINGTON BELT BAG PAPER PATTERN

NOTE: Paper Patterns are intended for experienced leathercrafters.

SUGGESTED SPECS

3/16" Seam Allowance

RECOMMENDED MATERIALS

4 to 5 oz Semi-Firm to Firm Tempered Leather (3.5 sq. ft.)

8 to 9 oz Firm Tempered Leather (Straps)

1" Center Bar Buckle

1" Ribbon Spring Swivel Snap

1/2" Button Stud

1" D-Rings (2)

REQUIRED TOOLS

Knife

Straight Edge

Mallet

Scratch Awl

Bell Skiver, Skiving Knife, or Wide Edger

Wing Divider

Pricking Irons or Stitching Chisels

Binder Clips or Similar

Harness Needle & Thread

Round Drive Punch

Buttonhole Punch

RECOMMENDED TOOLS

Edge Finishing Materials


Preferred Adhesive

Stitching Horse


LABEL	PATTERN PIECE	PIECES REQUIRED	RECOMMENDED LEATHER WEIGHT
A	Main Body	1	4 to 5 oz
B	Flap	1	4 to 5 oz
C	Card Pocket	1	4 to 5 oz
D	D-Ring Keeper	2	4 to 5 oz
E	Buckle Strap	1	8 to 9 oz
F	Adjustable Strap	1	8 to 9 oz
G	Keeper	1	4 to 5 oz

Please note the type of leather and tools you use will affect the outcome. Please use your best judgment when assembling your project. We recommend outlining the order of operations, measure and count twice before making any permanent alterations to your pattern.

PROJECT OVERVIEW

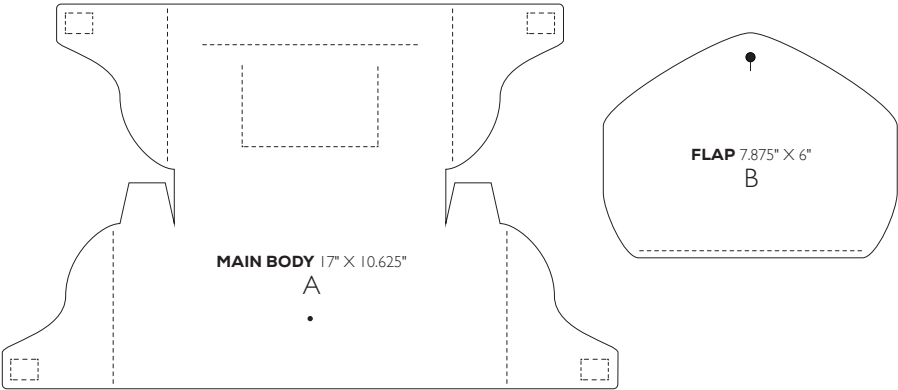

CARD POCKET 4.125" X 2.4" C




D-RING KEEPER 3.25" X 1" x2 D




BUCKLE STRAP 11.2" X 1" E



ADJUSTABLE STRAP 24" X 1" F



KEEPER 3" X .375" G



- PUNCH
- CUT
- - - - - STITCH
- ▨ SKIVE

PAPER PATTERN CARE INSTRUCTIONS

OPTION 1: Before cutting out pattern pieces, adhere a stiffer paper (cardstock or similar) with preferred adhesive.

OPTION 2: After cutting out pattern pieces, laminate individual pieces.

These are just suggestions to prolong the lifespan of the paper pattern. With proper care, these patterns can be used again and again!

ASSEMBLY INSTRUCTIONS

1. Cut required pieces. Before assembly, take the necessary steps to prepare leather and edges. Stitch the short ends of the Keeper (G) together.
2. Stitch Card Pocket (C) to Main Body (A) flesh sides together.
3. Attach Flap (B) to Main Body (A) just above Card Pocket (C), grain sides facing up.
4. Secure button stud onto Main Body (A).
5. Fold Main Body (A) in half with bottom gusset tabs folded inward. Align vertical stitch lines on each side and stitch together.
6. Slide a D-Ring onto the D-Ring Keeper (D). Fold D-Ring Keeper (D) closed around the corresponding holes on the left side of the Main Body (A), and saddle stitch around.
7. Repeat step 6 on the right side with other D-Ring and D-Ring Keeper (D).
8. Attach the Center Bar Buckle to the Buckle Strap (E). Fold the end around the center bar, align stitch holes and saddle stitch closed.
9. Slide the assembled Keeper (G) onto the Buckle Strap (E). Fold the opposing end of Buckle Strap (E) around the D-Ring attached to Main Body (A). Stitch together.
10. Slide Swivel Snap onto Adjustable Strap (F) end with stitch holes. Fold end over, and stitch together.
11. Feed Adjustable Strap (F) through Buckle and Keeper to secure.

COMPLETED PROJECT



EST **tandy**[®] 1919
LEATHER

FOR MORE PATTERNS, PROJECTS, AND TIPS,
VISIT [TANDYLEATHER.COM/BLOG](https://tandy-leather.com/blog).

Distributed by Tandy Leather 1900 SE Loop 820, Fort Worth, TX 76140
Made in the USA.

©2023 Tandy Leather. All rights reserved