


748 JUMBO BIN DATA SHEET:


SA packers now have the opportunity to compete with world-wide competitors who have already switched to plastic bulk bins. The "Packing for Profit" Jumbo bin improves pack-out quality and carries with it measurable financial benefits.




TOP VIEW

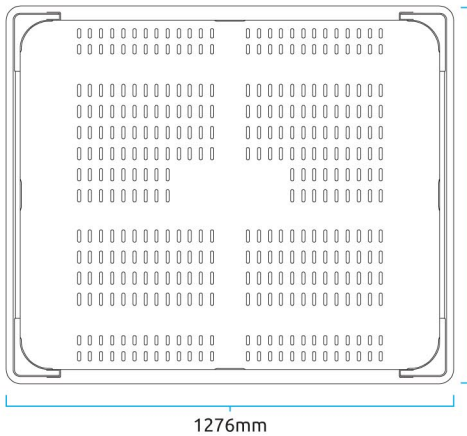

FRONT VIEW

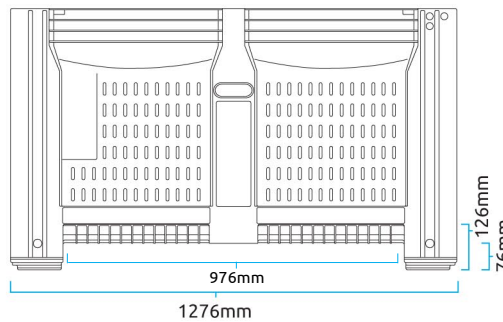

SIDE VIEW

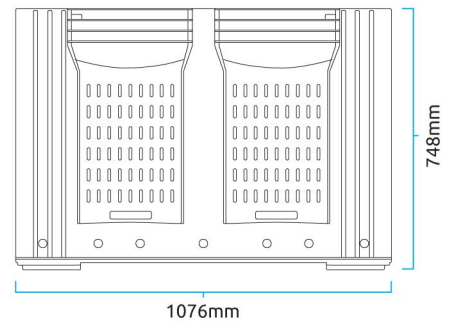

FEATURES AND BENEFITS

- Rounded corners and smoother interior surfaces results in less bruising and damage to your produce.
- Multiple vents in sides and base provide superior air flow so products cool faster adding valuable shelf-life to your produce.
- Unique design with rounded entry has a larger forklift entry height than wooden bins.
- Smooth, non-absorbent surface is not affected by dipping operations.
- The design is compatible with most bin handling equipment.
- Unique moulded label holders for cards and tags. Small, exterior pads reduce scratches.
- Easy, clear ownership identification with hot foil stamping.
- Comfortable handholds are built in for easy lifting and handling of bins.
- The positive interlocking foot design permits fast and safe stacking.

CAPACITY

- Up to 500 kg
- 803 Litres
- Tare Weight
- Vented 37 kg Solid 39kg

MOULDING PROCESS

High pressure injection moulding.

Materials

UV-stabilised impact modified polypropylene. Fully recyclable.

Container Construction

Double walled corner and centre posts. Two label holders and two hand holds for lifting.

Foot design

Positive interlocking with two feet.

Fork lift entry

76 mm opening with patented slide entry.

Ventilation slots

804 air vents located in side panels and floor facilitate air flow. All air vents have rounded surfaces on the inside.

STACKING

- 4700 kg on level ground in cold storage.
- 3800 kg on level ground in temperatures less than 35° C for less than 1 month.
- 3400 kg on level ground at temperatures less than 35° C for more than 1 month.

DIMENSIONS

Overall external size:
1276mm x 1076mm
Height: 748 mm Internal size:
Maximum: 1267mm x 1067 mm
(at externalised panels) Minimum:
1196 mm x 996 mm (at top rim)
Depth: 617 mm

VARIATIONS

- Available with solid, 3 or 8 mm vented walls and base.
- Vent opening: 5mm instead of 8mm.

OPTIONS

- Easy identification with hot foil stamping, or moulded logo.
- Bar coding.
- RF tagging.

Neil Hare Road, Atlantis, 7349 • PO Box 1551, Dassenberg, 7349

T: 021 577 1205 • F: 021 577 3399

Contact: SalesForce@mpcsa.co.za • www.mpcsa.co.za



plastic containers