WEB STRAP HOISTS







NO COMPROMISES

Our priority is to provide superior and reliable Manual Web Strap Hoists with quality services that you can depend on. Lug-All Manual Web Strap Hoists are lighter, faster to use, more precise, and more maneuverable than comparable chain hoists.

нож то виу 層

Lug-All is proud to have a vast network of dealers that are all experts on our products and can assist with any questions you may have. Visit the <u>Locate a Sales Rep</u> webpage at Lug-All.com to get in contact with our best-in-class dealers to find exactly what you need. Want to become a dealer?

- Our Sales Rep can start you on the path to joining our Dealer Network
- Visit our online store at Lug-All.com to buy both hoists and replacement parts
- You can call us toll-free at 877-658-4255 or email us at sales@lug-all.com

LUG-ALL QUALITY


- Cast aluminum frames provide superior durability
- Open hoist design lets you inspect the Web Strap at any time
- Threaded nut connections are now welded to be stronger than before

SAFETY

Interlocking Double Pawl System: Our interlocking double-pawl ratchet system ensures that one pawl always secures the load no matter what.

Overload Protection: Lug-All web strap hoists feature our breakable stress link. The stress link will snap when the hoist is overloaded, warning the operator of the overloaded pull. The stress link must then be replaced.

One Handed Operation: Lug-All Winch Hoists can be operated safely and easily with one hand regardless of Lug-All orientation.

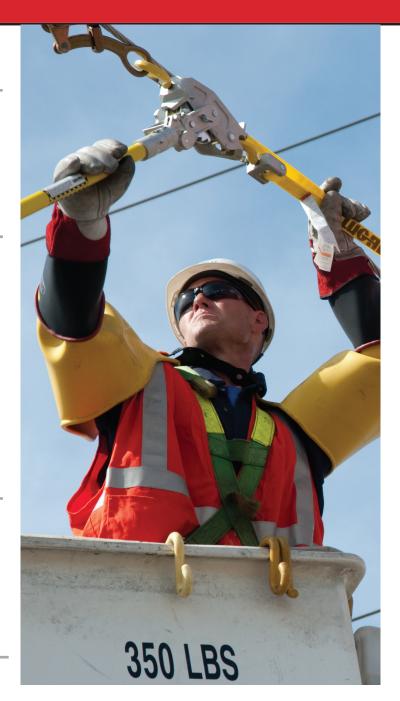



With our modern manufacturing facilities we can customize our Manual Web Strap Hoists to your specific needs.

- 1. Handle Lengths
- 2. Web Strap Lengths
- 3. Oversized Wind-up Wheel
- 4. Main Frame Eye Bolt for Small Frame Models
- Optional levers for faster operation on the U-frame and main frame pawl.
- 6. Removable and non-removable pulley blocks
- 7. Thumb Screw for removable handle
- 8. Removable Web End
- 9. Captive Wing Nut on handle

Contact us for additional personalized custom options.

The Right To Repair 🔀

Lug-All supports American's Right to Repair.

Replacement parts for all Lug-All Manual Web Strap Hoist are available through our authorized dealers for purchase or online. If your Lug-All hoist becomes severely damaged, you can send it to us, and we can return the hoist to its original condition for a fraction of the cost of a new hoist. Visit our Contact Us page online, email us at sales@Lug-All.com, or call us at 877-658-4255 to ask about our repair services.

Want to do repairs yourself? Visit our YouTube channel to get step-by-step instructions to any number of repairs.



All hooks are 360° easy-swiveling designs with a minimum of a 5:1 safety factor.

- (A) Spring Safety Latch Shank Hook
- (U) Swivel Gate Hook
 The hook latch revolves on the hook shank and is lockable once ready for use.
- **(B)** Hot Stick Ring with Standard Latching Hook - A welded 1-inch diameter ring approved for hot stick tools.
- (UB) Swivel Gate Hook with Hot Stick Ring
 Standard swivel gate and has a 1-inch diameter welded hot stick ring.
- (HB) Hot Stick Ring with Hot Stick Hook Latch
 Rings on the hook and latch for use on energized lines. Using holding sticks, the latch and hook can be maneuvered.
- (EB) Eye Bolt
 - Use an eye bolt to secure a connection directly to the hoist.
- (SLH) Self Locking Hook
 - Once under tension the gate automatically closes.

HOOK OPTIONS

WEB STRAP HOISTS

Small Frame

LIGHTWEIGHT SMALL FRAME HOISTS

MODEL NUMBER	CAPACITY	SINGLE PULL DISTANCE		HOOK STYLE	STRAP LENGTH	HANDLE LENGTH	NET WEIGHT
		Min	Max				(LBS.)
500-A	1/4 Ton	14-1/2″	16′	Standard Latching Hooks	17′	15″	6.75
500-i	1/4 Ton	14-1/2"	16'	Eye Bolt Hooks	17′	15″	6.5
500-A-FH	1/4 Ton	14-1/2"	16'	Standard Latching Hooks	17'	13"	7.25
1000-A	1/2 Ton	16"	9' 6"	Standard Latching Hooks	10'	17-1/2"	6.75
1500-A	3/4 Ton	16"	7' 5"	Standard Latching Hooks	8'	20"	7

Lightweight Small Frame



Model 500-i

Model 1000-A Model 1500-A

Model 2-A Model 25-A Model 25-iHB

The eyebolt makes the set-up for double-line pulls easier and faster!

SMALL FRAME HOISTS

MODEL NUMBER	DOUBLE LINE CAPACITY	DOUBLE PULL DISTANCE		SINGLE LINE CAPACITY	SINGLE PULL DISTANCE		STRAP LENGTH	HANDLE LENGTH	NET WEIGHT
		Min	Max		Min	Мах			(LBS.)
2-A	1 Ton	21″	4'-5"	1/2 Ton	16″	9'-6"	10′	30″	10.25
2-B	1 Ton	21″	4'-5"	1/2 Ton	16″	9'-6"	10′	32″	10.5
2-U	1 Ton	24″	4'-4"	1/2 Ton	18″	9'-6"	10′	30″	10.75
2-UB	1 Ton	24″	4'-4"	1/2 Ton	18″	9'-6"	10′	32″	11
2-HB	1 Ton	24″	4'-4"	1/2 Ton	18″	9'-6"	10′	32″	11
25-A	1-1/2 Ton	21″	3'-5"	3/4 Ton	16″	7′-6″	8′	20″	10
25-B	1-1/2 Ton	21″	3′-5″	3/4 Ton	16″	7′-6″	8′	22″	10.5
25-U	1-1/2 Ton	24″	3'-4"	3/4 Ton	18″	7'-6″	8′	20″	10.5
25-UB	1-1/2 Ton	24″	3'-4"	3/4 Ton	18″	7′-6″	8′	22″	10.75
25-HB	1-1/2 Ton	24″	3'-4"	3/4 Ton	18″	7'-6"	8′	22″	11

WEB STRAP HOISTS

LIGHTWEIGHT MEDIUM FRAME HOISTS


MODEL NUMBER	DOUBLE LINE CAPACITY	DOUBLE PULL DISTANCE		SINGLE LINE CAPACITY	SINGLE PULL DISTANCE		STRAP LENGTH	HANDLE LENGTH	NET WEIGHT
		Min	Мах		Min	Max			(LBS.)
35-A	1-1/2 Ton	27"	7'-2"	3/4 Ton	19"	15'-4"	16'	30"	12.75
35-B	1-1/2 Ton	27"	7'-2"	3/4 Ton	19"	15'-4"	16'	32"	13
35-U	1-1/2 Ton	30"	7'-1"	3/4 Ton	21"	15'-4"	16'	30"	13.25
35-UB	1-1/2 Ton	30"	7'-1"	3/4 Ton	21"	15'-4"	16'	32"	13.25
35-HB	1-1/2 Ton	29"	7'-1"	3/4 Ton	20"	15'-4"	16'	32"	13.25
40-A	2 Ton	25"	4'-1"	1 Ton	19"	9'-4"	10'	36"	13.25
40-B	2 Ton	25"	4'-1"	1 Ton	19"	9'-4"	10'	38"	13.5
40-U	2 Ton	29"	4'-0"	1 Ton	21"	9'-4"	10'	36"	13.75
40-UB	2 Ton	29"	4'-0"	1 Ton	21"	9'-4"	10'	38"	13.75
40-HB	2 Ton	27"	4'-0"	1 Ton	20"	9'-4"	10'	38"	13.75

Model 40-A

Model 35-A

Lightweight Medium

Frame






RAISE YOUR EXPECTATIONS

Lug-All® customers are looking for a level of quality unmatched by the competition. We design and build premium hoists used in critical industrial jobs. Our Hoists are proven to be the most safe, reliable, and durable on the market.

WARRANTIES

We guarantee that your Lug-All hoist is free from any defects and any material or workmanship related warranty is covered for one year from purchase date.

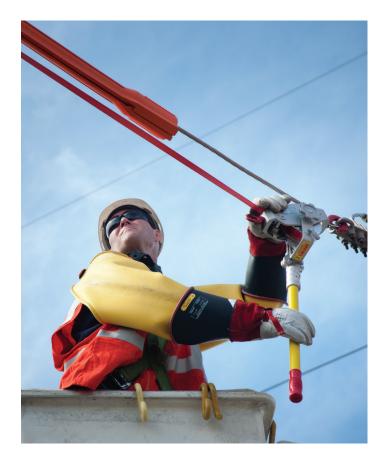



LUG-ALL WINCH-HOISTS ARE INTENDED FOR INDUSTRIAL USE ONLY AND NOT FOR LIFTING OR SUPPORTING HUMAN OR ANIMAL CARGO. OVERLOADING AND IMPROPER USE CAN RESULT IN INJURY OR DEATH.

LUG-ALL Manual Web Strap Hoists are NOT intended for lifting or supporting human or animal cargo. Overloading and improper use can result in injury or death.

Do not attempt to operate any Lug-All hoist until you fully read and understand its instructions and warnings as detailed in its Instruction Manual. Failure to operate or maintain your Lug-All hoist properly can result in property damage, bodily injury, or death.

TO AVOID PERSONAL INJURY OR EQUIPMENT DAMAGE

- Do not use if web strap is twisted, kinked, frayed, or damaged.
- Do not use to lift people or loads over people.
- Do not leave an unattended load suspended in the air.
- Do not lengthen or make any substitution for the Lug-All reversible handle.
- Do not remove or obscure warning labels.
- Do not use hoist as a load binder.
- Do not snag or pull the strap over edges, as serious weakening may result.
- Do not use a Lug-All hoist as a tow line.
- Close latches on hook before using.
- Use only genuine Lug-All replacement parts.

The use of the web strap winch hoist in an unsafe manner may result in serious injury or death.



650 Lincoln Road | Birdsboro, PA 19508 610-286-9884 | Fax: 610-286-9661 Lug-All.com | mail: sales@lug-all.com



©2023, Promise to Perform Industries Inc. All rights reserved. All specifications and product designs subject to change without notice. All trademarks are the sole property of their respective owners. LAWS-BR-0923