


Adapter QF/Smooth

Ø mm	O/D mm	I/D mm	Rolled Edge (nom. mm.)	Length (nom. mm)	Weight kg	Galvanised Steel
80	79	78	6	58	0.10	0.7
100	98	97	6			
125	124	123	6			
140	139	138	6			
150	148	147	6			
160	159	158	6			
180	179	178	8			
200	200	199	8			
224	224	223	8			
250	250	249	8			
280	279	278	8			
315	313	312	10			
350	348	347	10			
400	400	398	10			
450	449	447	10			
500	499	497	10			
560	559	557	10			
630	629	627	10			
710	709	707	10			
						0.9

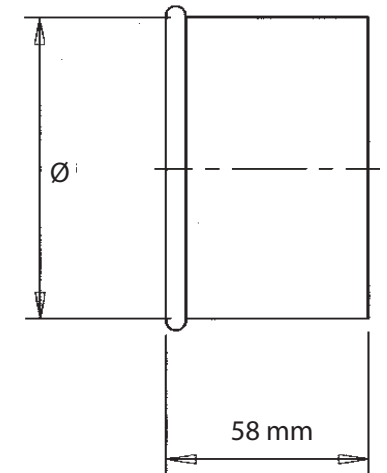

Construction
Longitudinal seam type: spot welded.

Ends
QF (Quick-Fit rolled edge).

Temperature Rating of Product Components		
° C	Straight Duct	Sealants
-20°	Galvanised Steel	3M Metal Sealant 2084
121°		
260°		

Additional Notes
Galvanised steel provides little or no breakdown of zinc (zinc melting point 393°C)

Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Smooth Adapter	Galvanised	DX51D with Z275 Coating
3M Metal Sealant 2084	Acetone blend	AAMA Specification 801.1