


VZ Four-Shaft-Shredder

Bulky and very long
timber waste
Timber cuts
Long boards
and pallets
Types of packaging
and cartons

VOTECS



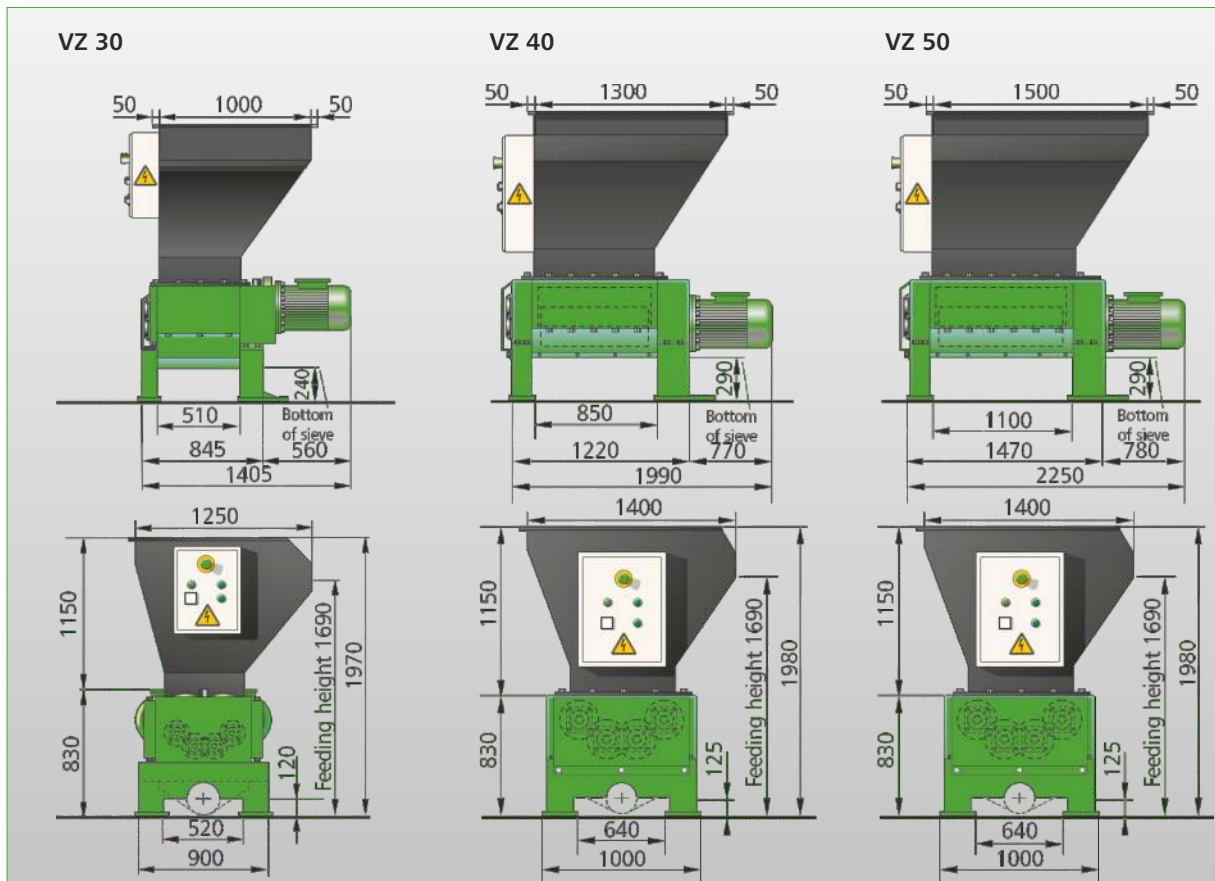

Technical Data	VZ 30	VZ 40	VZ 50
Hopper opening:			
Width (mm):	1.000	1.300	1.500
Length (mm):	1.250	1.400	1.400
Cutting chamber :			
Working width (mm):	462	760	990
Length (mm):	562	700	700
Disk diameter (mm):	235	280	280
Motor performance (kW):	2 x 7,5; 2 x 11	2 x 15; 2 x 18,5; 2 x 22	2 x 15; 2 x 18,5; 2 x 22; 2 x 30
Throughput:	*This may vary according to equipment and drive performance of the machine.		
Screen-Ø 20 mm (kg/h):	300 - 500	600 - 1.200	800 - 1.500
Screen-Ø 40 mm (kg/h):	500 - 800	800 - 1.500	1.000 - 2.000
Connection-Ø (mm):	200	200	200
Weight ca. (kg):	1.300	2.500	3.000



Standard equipment

- ✓ Cutting chamber with 2 cutter shafts and 2 spacer shafts
- ✓ Twin drive with sealed oilbath gearbox
- ✓ Automatic reverse and automatic overload protection
- ✓ Breaker guide system to prevent long granulates
- ✓ Special designs on request

Options

- ✓ Cutting chamber with four cutting shafts
- ✓ Specialised hoppers for individual applications
- ✓ Hydraulic press-down device
- ✓ Discharge worm screw or suction system
- ✓ Material discharge