

100 Series Fire Extinguisher Mount

- Read these instructions completely before purchasing and installing to ensure you are comfortable with the process.
- Install at your own risk.
- To ensure success, always wear the appropriate safety equipment and chose the right tool for the job.



Step 1

- Using a plastic prybar, remove the (4) seat bolt plastic covers



Step 2

- Using a 14mm socket, remove the (4) bolts holding the seat to the floor.




Step 3

- Tilt the seat backwards to make working under the front easier. You may need a counter weight or prop to keep the seat in this position.



Step 4

- Using a #2 phillps head screwdriver to remove the plastic trim screw located at the front of the seat closest to the door.

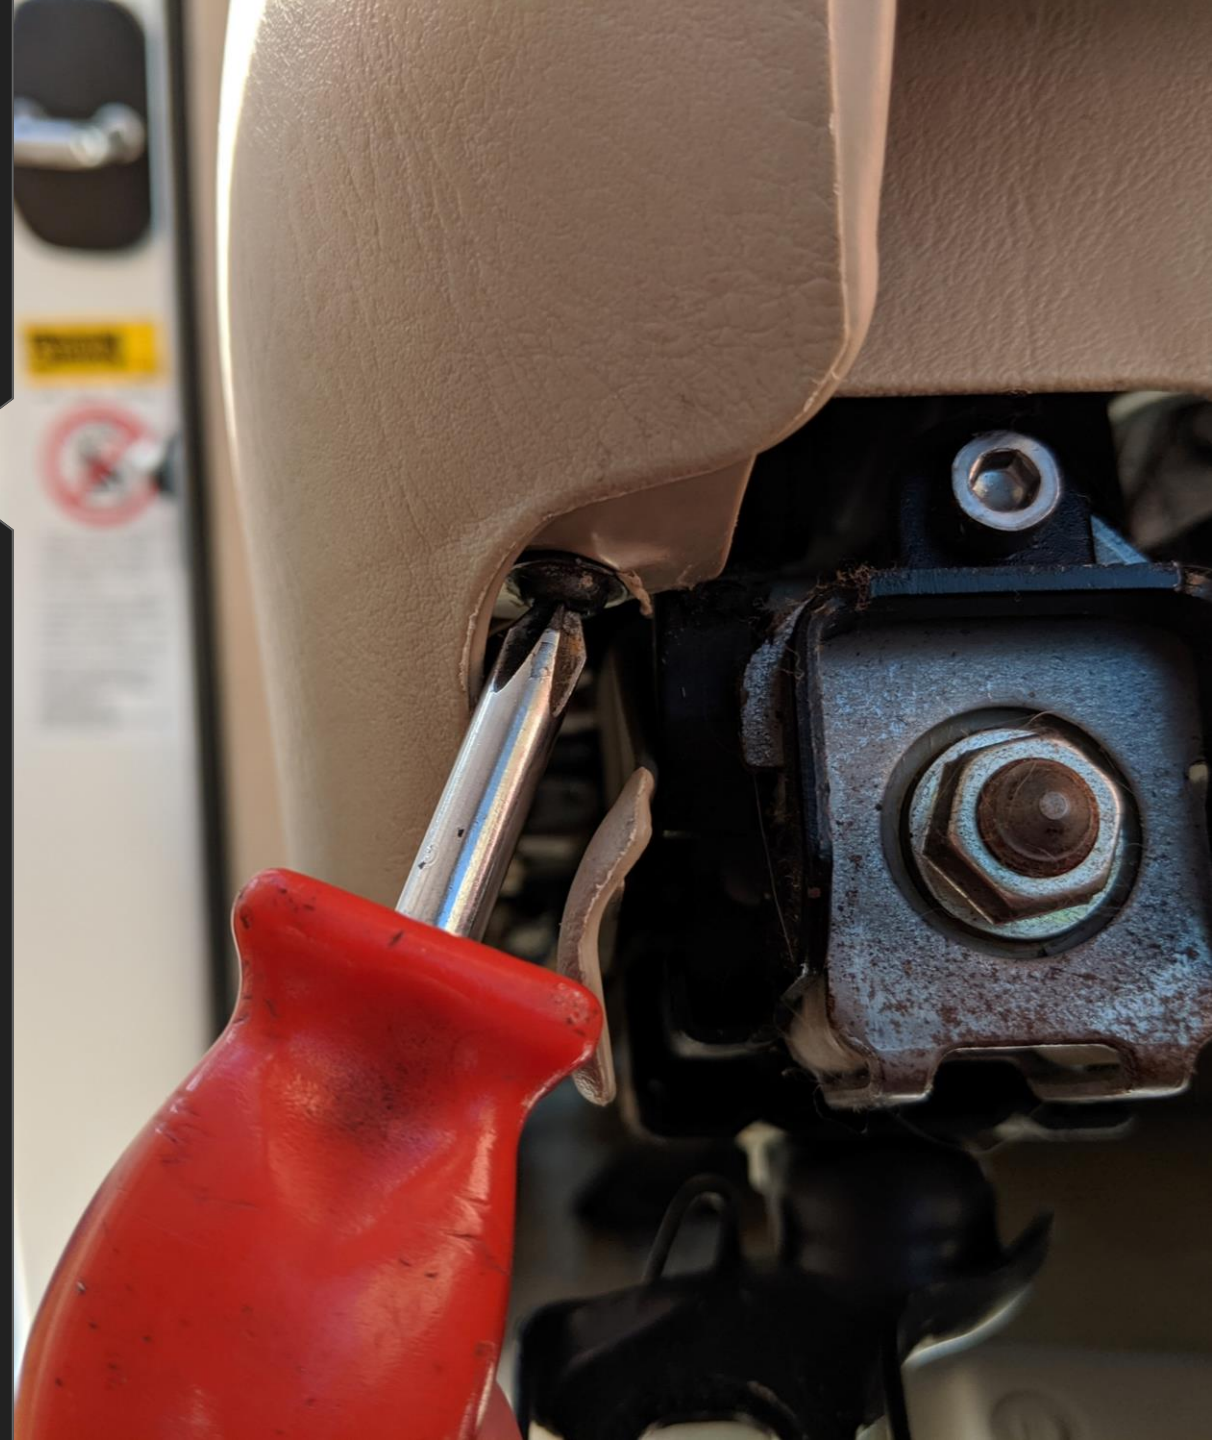


Step 5

- Loosen, do not remove, the screw just below the seat adjustment controls.



Step 6

- Using a stubby phillips head #2 screwdriver, gently pull back the outside trim enough to remove the screw holding the lower front trim on.

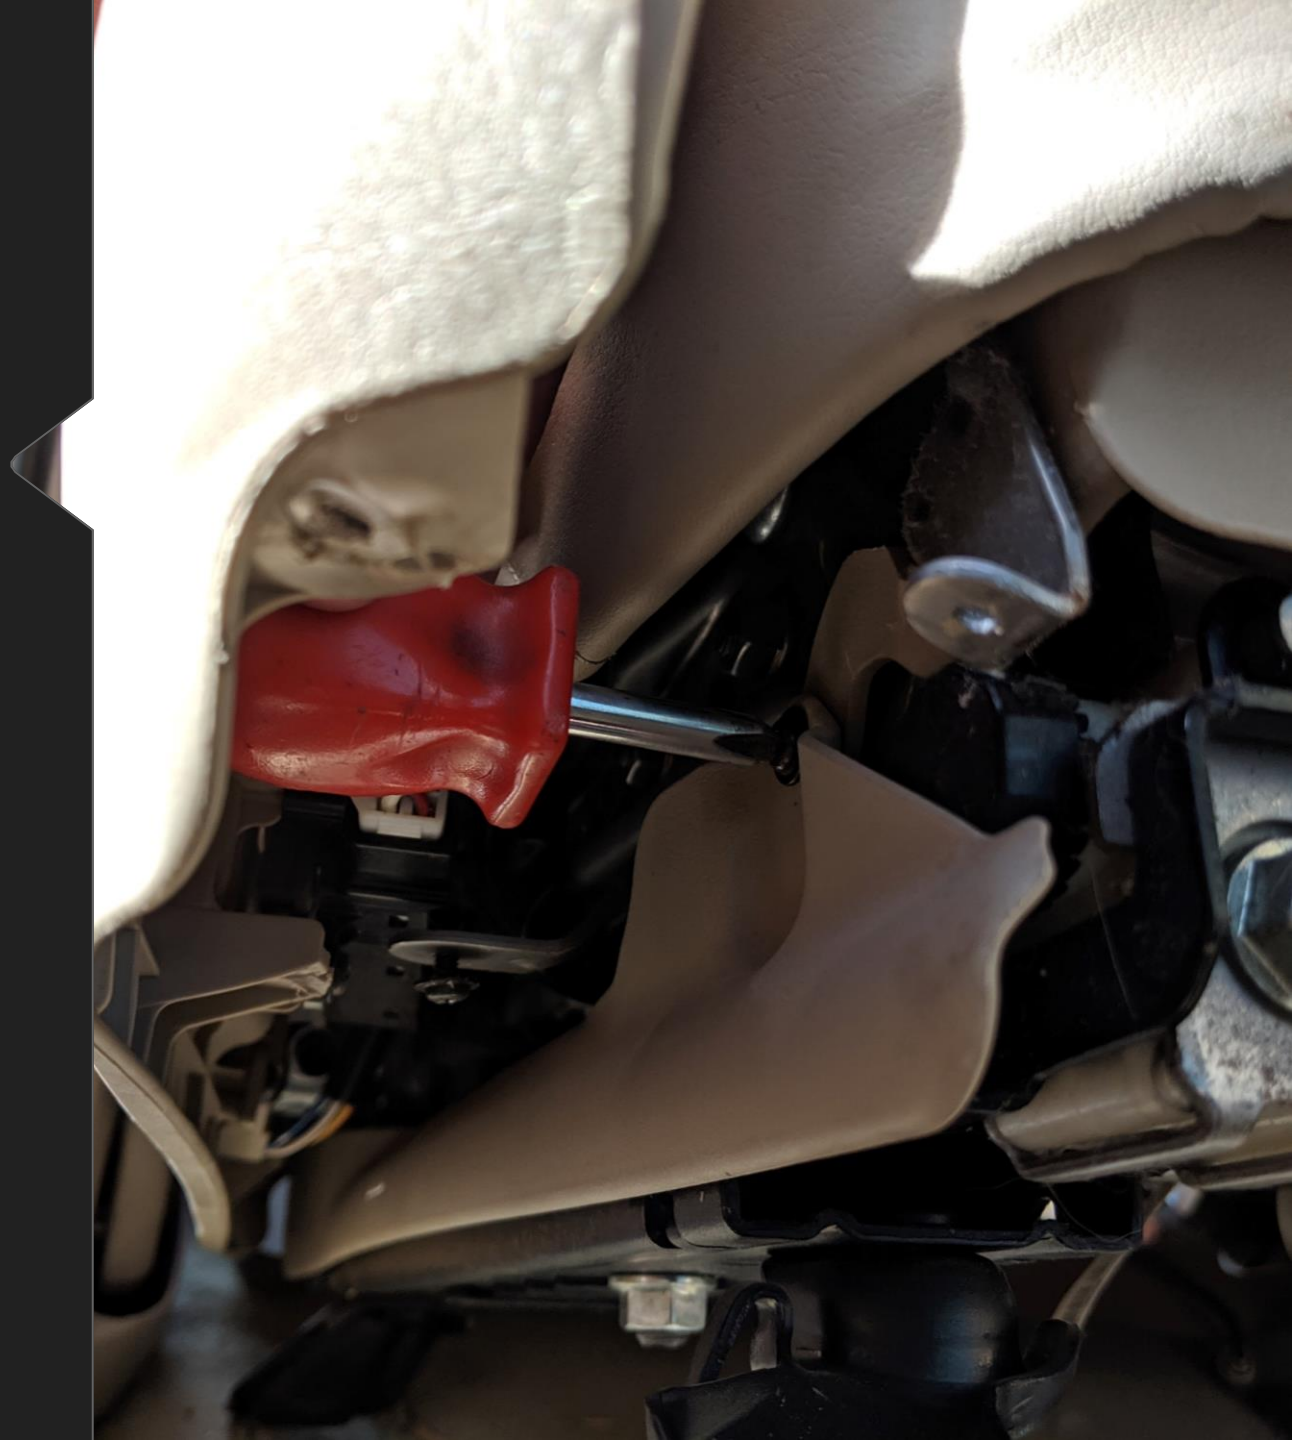

Step 7

- Gently pull forward the front lower trim piece. You do not have to completely remove this for installation. If you feel more comfortable removing it, repeat the previous steps for the opposite side of the seat.



Step 8

- Locate the (2) bolts located underneath the front of the edge of the seat. Using a 12mm socket with an extension, remove these bolts. Do not adjust the seat after removing these or lining the holes up will be more difficult.



Step 9

- Being very gentle of the front plastic trim, bolt your new mount using the (2) 12mm bolts removed in the last step. The bent tabs on the bracket point towards the rear of the seat.



Step 10

- Reattach the plastic trim and seat in the reverse order.



Enjoy your new Fire Extinguisher Mount!

Thank you for your support!



For technical help, please contact us at Questions@OwlExpedition.com or (304)-276-6523.