

DS-LEDIER-3X3, 4X4, 5X5



IE015A / IE015R / IF015R  
IE020A / IE020R / IF020R  
IE025A / IE025R / IF025R  
IE040A / IE040R / IF040R

# SEAMLESS **KITTED** Flat dvLED Mounting System


FOR SAMSUNG IEA, IER AND IFR SERIES DIRECT VIEW LED DISPLAYS

Peerless-AV's SEAMLESS Kitted Series Flat dvLED Mounting System is designed exclusively for the Samsung IEA, IER and IFR Series Direct View LED Displays, offering slim, space-saving, and aesthetically appealing designs for multiple configurations. With integrated cable management, easy-hang hardware, and a lightweight aluminium frame, integrators can quickly and easily build the perfect video wall. Peerless-AV® also offers start to finish support through the SEAMLESS dvLED Video Wall Integration Program. The Peerless-AV dvLED Solutions Team is there every step of the way to ensure every customer receives SEAMLESS product support and service.

## SAMSUNG

- Lightweight aluminium frame is easy to install and minimises the wall load
- Modular design offers unlimited video wall display configurations
- Tight tolerances and wall plate spacers ensure the cabinets are properly positioned

DS-LEDIER-5X5 shown

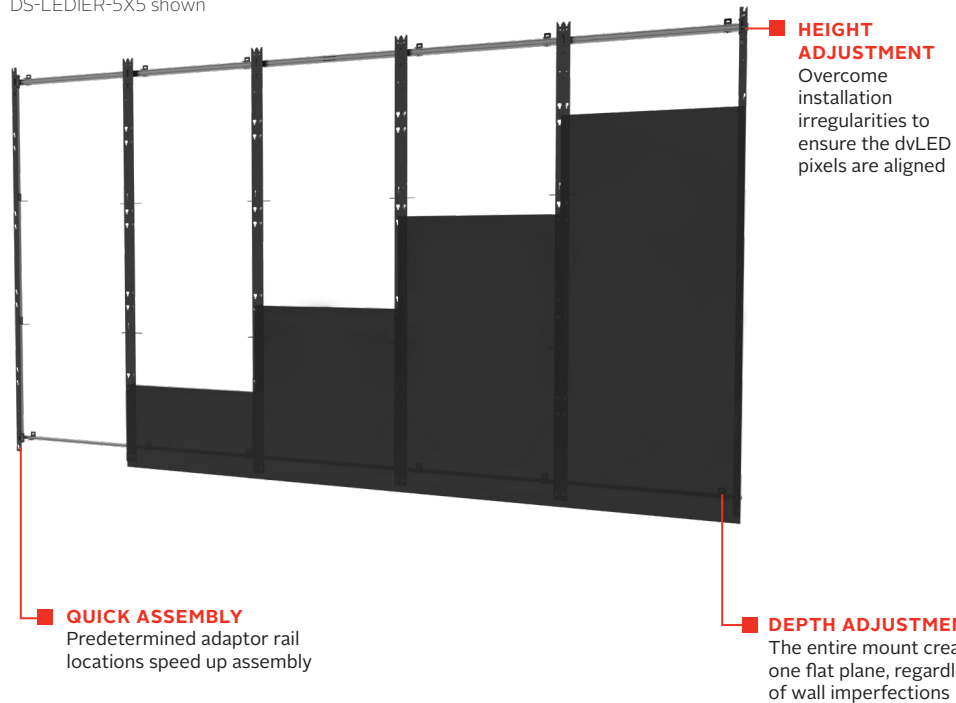

**SEAMLESS by Peerless-AV® - dvLED Video Wall Integration Program offers:**

 EXPERT TEAM	 MARKETING SUPPORT	 CUSTOM CAPABILITY	 DEDICATED LED MOUNTING SOLUTIONS
 PRECISION ENGINEERING	 LIGHTWEIGHT DESIGN	 INSTALLER FRIENDLY	 CERTIFIED TRAINING



<b>DS-LEDIER-3x3</b>	SEAMLESS Kitted Series Flat dvLED Mounting System for 3x3 Samsung IEA, IER and IFR Series Direct View LED Displays
<b>DS-LEDIER-4x4</b>	SEAMLESS Kitted Series Flat dvLED Mounting System for 4x4 Samsung IEA, IER and IFR Series Direct View LED Displays
<b>DS-LEDIER-5x5</b>	SEAMLESS Kitted Series Flat dvLED Mounting System for 5x5 Samsung IEA, IER and IFR Series Direct View LED Displays

**Product Specifications**

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	COLOUR
<b>DS-LEDIER-3x3</b>	113.31" x 61.69" x 2.16"-2.91" (2878 x 1567 x 55-74mm)	47lb (21.4kg)	246lb (111.6kg)	Powder Coat & Clear Anodized Finish	Black & Silver
<b>DS-LEDIER-4x4</b>	151.10" x 82.95" x 2.16"-2.91" (3838 x 2107 x 55-74mm)	65.5lb (29.8kg)	437lb (198.4kg)		
<b>DS-LEDIER-5x5</b>	188.90" x 104.21" x 2.16"-2.91" (4798 x 2647 x 55-74mm)	86lb (39.1kg)	682lb (310kg)		

**Package Specifications**


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
<b>DS-LEDIER-3x3</b>	66.50" x 29.00" x 8.00" (1,689 x 737 x 203mm)	112lb (50.9kg)	735029339243	Wall Plate, Mounting Bracket, Spacer & Hardware	1
<b>DS-LEDIER-4x4</b>	116.50" x 29.00" x 8.00" (2,959 x 737 x 203mm)	183lb (83.2kg)	735029339250		
<b>DS-LEDIER-5x5</b>	116.50" x 29.00" x 8.00" (2,959 x 737 x 203mm)	201lb (91.4kg)	735029339267		

**Accessories**

**DS-LEDTK Models:** Universal Trim Kit for dvLED Video Walls 89mm to 150mm deep

MODEL NO.	DIMENSION "A"	DIMENSION "B"
<b>DS-LEDIER 3x3</b>	61.69" (1567mm)	113.31" (2878mm)
<b>DS-LEDIER 4x4</b>	82.95" (2107mm)	151.10" (3838mm)
<b>DS-LEDIER 5x5</b>	104.21" (2647mm)	188.90" (4798mm)

All dimensions = **inch** (mm)

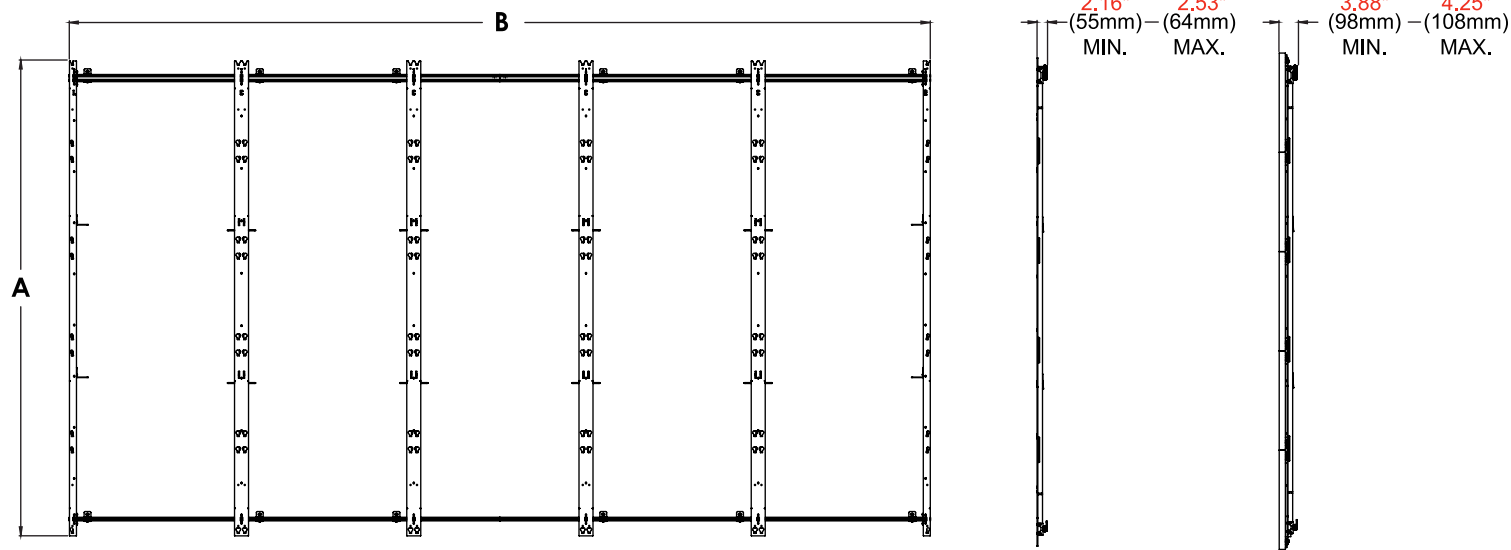

**Architect Specifications**

The SEAMLESS Kitted Series Flat dvLED Mounting System shall be a Peerless-AV model DS-LEDIER-3x3, 4x4, 5x5 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit [peerless-av.com](http://peerless-av.com) to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

**Peerless-AV**  
2300 White Oak Circle  
Aurora, IL 60502  
USA  
**(800) 865-2112**  
**(630) 375-5100**

**Peerless-AV EMEA**  
Unit 2 Curo Park  
Frogmore, St. Albans  
Hertfordshire, AL2 2DD  
United Kingdom  
**+44 (0) 1923 200 100**

**Peerless-AV B.V.**  
Papendorpseweg 75  
3528 BJ Utrecht  
The Netherlands  
**+31 (0) 70 770 8037**

**Peerless-AV Latin America**  
Av. de las Industrias 413  
Parque Industrial Escobedo  
General Escobedo, N.L.,  
México, 66062  
**+52 (81) 8384-8300**

