

DS-LEDIWP-5X5, 6X6, 8X8




SEAMLESS **KITTED** Flat dvLED Mounting System FOR INFILED WP SERIES DIRECT VIEW LED DISPLAYS

Peerless-AV's SEAMLESS Kitted Series Flat dvLED Mounting System is designed exclusively for the INFILED WP Series Direct View LED Displays, offering slim, space-saving, and aesthetically appealing designs for multiple configurations. With integrated cable management, easy-hang hardware, and a lightweight aluminium frame, integrators can quickly and easily build the perfect video wall. Peerless-AV® also offers start to finish support through the SEAMLESS dvLED Video Wall Integration Program. The Peerless-AV dvLED Solutions Team is there every step of the way to ensure every customer receives SEAMLESS product support and service.

INFILED


DS-LEDIWP-5X5 shown

- Lightweight aluminium frame is easy to install and minimises the wall load
- Modular design offers unlimited video wall display configurations
- Tight tolerances and wall plate spacers assure the cabinets are properly positioned

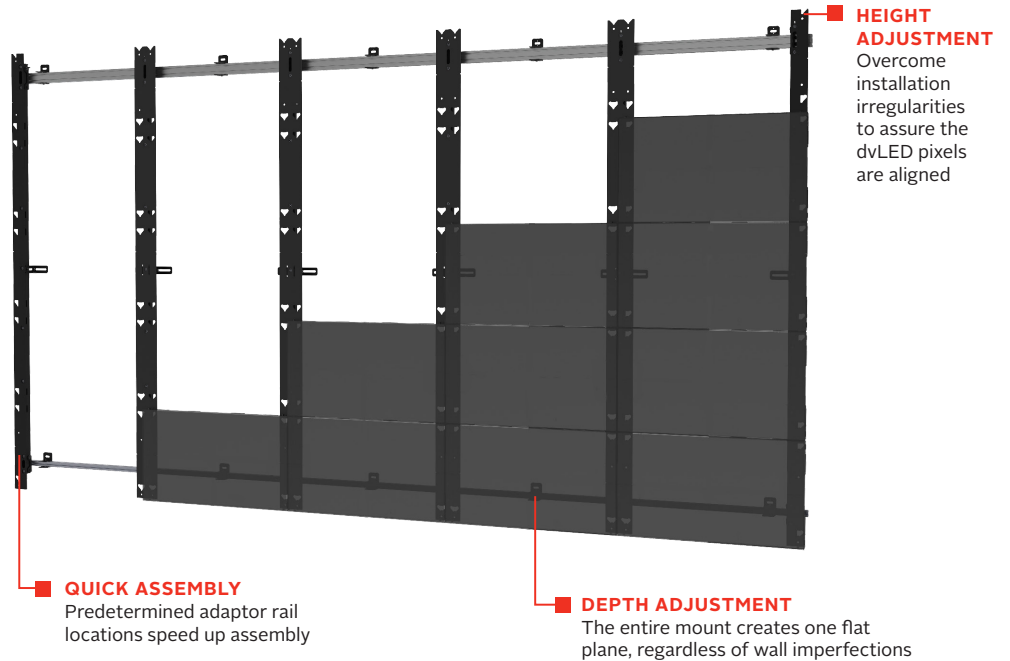

SEAMLESS by Peerless-AV® - LED Video Wall Integration Program offers:

 EXPERT TEAM	 MARKETING SUPPORT	 CUSTOM CAPABILITY	 DEDICATED LED MOUNTING SOLUTIONS
 PRECISION ENGINEERING	 LIGHTWEIGHT DESIGN	 INSTALLER FRIENDLY	 CERTIFIED TRAINING

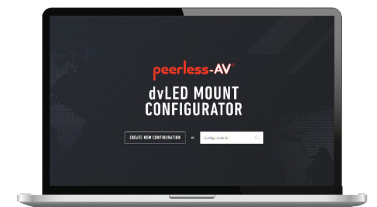

Visit Peerless-AV.com/SEAMLESS to get your project started!

DS-LEDIWP-5X5	SEAMLESS Kitted Series Flat dvLED Mounting System for 5x5 INFiLED WP Series Direct View LED Displays
DS-LEDIWP-6X6	SEAMLESS Kitted Series Flat dvLED Mounting System for 6x6 INFiLED WP Series Direct View LED Displays
DS-LEDIWP-8X8	SEAMLESS Kitted Series Flat dvLED Mounting System for 8x8 INFiLED WP Series Direct View LED Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	COLOUR
DS-LEDIWP-5X5	118.11" x 65.50" x 2.16"-2.91" (3000 x 1664 x 55-74mm)	83lb (38kg)	286lb (130kg)	Powder Coat & Clear Anodised Finish	Black & Silver
DS-LEDIWP-6X6	141.73" x 78.79" x 2.16"-2.91" (3600 x 2001 x 55-74mm)	102lb (46kg)	412lb (187.2kg)		
DS-LEDIWP-8X8	188.98" x 105.36" x 2.16"-2.91" (4800 x 2676 x 55-74mm)	165lb (75kg)	733lb (332.8kg)		

Package Specifications


	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
DS-LEDIWP-5X5	116.50" x 29.00" x 8.00" (2959 x 737 x 203mm)	200lb (91kg)	735029342465	Wall Plate, Mounting Bracket, Spacer & Hardware	1
DS-LEDIWP-6X6	116.50" x 29.00" x 8.00" (2959 x 737 x 203mm)	223lb (101kg)	735029342472		
DS-LEDIWP-8X8	116.50" x 29.00" x 8.00" (2959 x 737 x 203mm)	284lb (129kg)	735029342489		

Accessories

DS-LEDTK Models: Universal Trim Kit for dvLED Video Walls 89mm to 150mm deep

All dimensions = **inch** (mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"	Video Wall Width	Video Wall Height
DS-LEDIWP-5x5	65.50" (1664mm)	118.11" (3000mm)	108.61" (2759mm)	30.68" (779mm)	58.42" (1484mm)	118.11" (3000mm)	66.44" (1688mm)
DS-LEDIWP-6x6	78.79" (2001mm)	141.73" (3600mm)	132.23" (3359mm)	30.68" (779mm)	71.71" (1821mm)	141.73" (3600mm)	79.72" (2025mm)
DS-LEDIWP-8x8	105.36" (2676mm)	188.98" (4800mm)	179.48" (4559mm)	30.68" (779mm)	98.28" (2496mm)	188.98" (4800mm)	106.30" (2700mm)

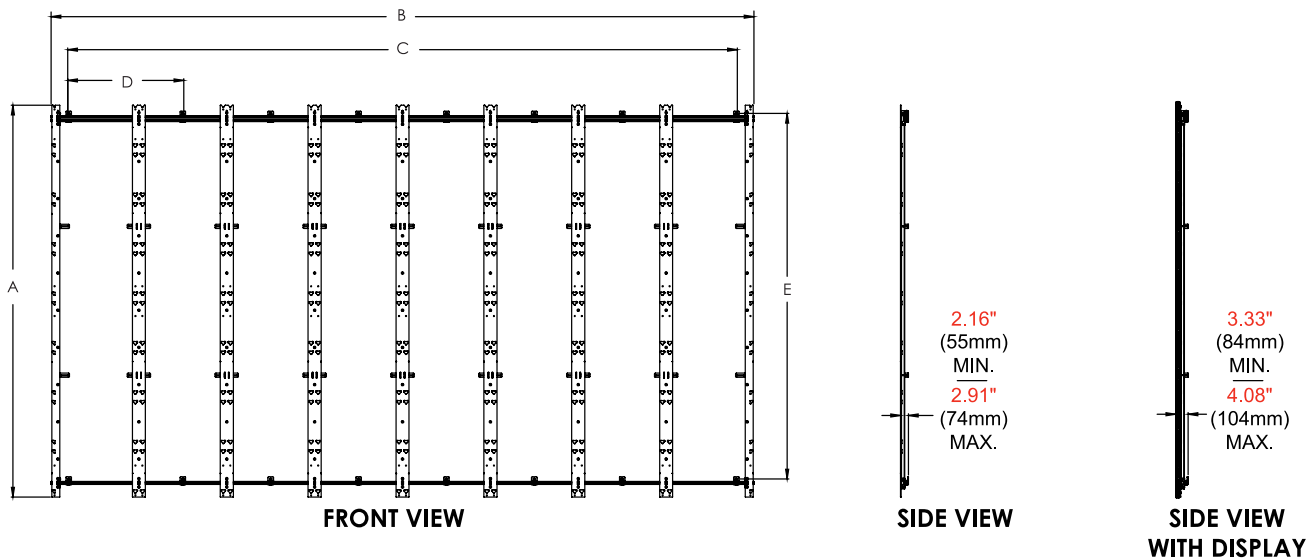

Architect Specifications

The SEAMLESS Kitted Series Flat dvLED Mounting System shall be a Peerless-AV model DS-LEDIWP-4X4, 5X5, 6X6, 8X8 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, kiosks, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV EMEA
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV Latin America
Av. de las Industrias 413
Parque Industrial Escobedo
General Escobedo, N.L.,
México, 66062
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

