

SKU: AC-10100E

AC10100H

10,000 BTU Portable Air Conditioner



OWNER'S MANUAL

Read and save these instructions.



READ AND SAVE THESE INSTRUCTIONS.

TABLE OF CONTENTS

Register Your Product Online	3
Safety Information & Warnings	4
Product Features	
Assembly & Installation	8
Operation	
Cleaning & Maintenance	15
Limited Manufacturer's Warranty	

SPECIFICATIONS

Model No.	AC-10100E/AC-10100H	
Voltage:	115V~	
FREQUENCY:	60Hz	
POWER CONSUMPTION /	1070W / 10A	
AMPERE (COOLING):		
Power Consumption /	890W / 8.4A	
AMPERE (HEATING):		
AIR VOLUME (MAX. SPEED):	210 CFM	
DEHUMIDIFICATION CAPACITY:	4.6 pints/hour	
COMPRESSOR TYPE:	Rotary	
Refrigerant:	R-410A	
FAN SPEEDS:	2	
TIMER:	1-12 hours	
NET WEIGHT:	50 lbs	
DIMENSIONS:	15.50"D x 12.00"W x 29.50"H (w/wheels)	

REGISTER YOUR PRODUCT ONLINE

Register Your NewAir Product Online Today!

Take advantage of all the benefits product registration has to offer:



Service and Support

Troubleshoot, diagnose, and service issues faster and more accurately



Recall Notifications

Stay up to date on safety, system updates, and recall notifications



Special Promotions

Opt-in for NewAir promotions and offers

Registering your product information online is safe & secure and takes less than 2 minutes to complete:


newair.com/register

record the following information, which is located on the manufacturer's nameplate on the rear of the unit. You will need this information if it becomes
necessary to contact the manufacturer for service inquiries.
Date of Purchase:
Serial Number:
Model Number:

SAFETY INFORMATION & WARNINGS

SAFETY PRECAUTIONS

For safety reasons, please read this manual carefully before operating. We strongly recommend keeping this manual in a safe place for future reference.

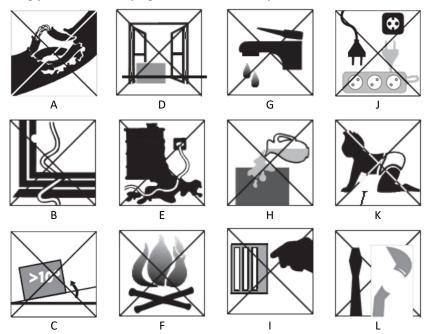

GENERAL SAFETY

- A. Do not use a damaged power cord.
- B. Do not clamp or bend the power cord.
- C. Always operate the unit in an upright position and place it on a flat, level surface at least 14 inches away from any other object.
- D. Do not place in front of an open window.
- E. Do not bring in contact with chemicals.
- F. Do not place near a heat source.
- G. Do not immerse in water.

- H. Avoid areas where liquid can spill onto the unit.
- I. Do not place objects on or in the unit, and do not cover or obstruct the inlet or outlet grills.
- J. Do not use an extension cord.
- K. Keep out of the reach of children.
- L. Never try to repair or dismantle the unit yourself. Unauthorized repairs can void your warranty and endanger the user.

ELECTRICAL SAFETY

- This appliance is for indoor use only.
- Always turn off the unit and unplug it when not in use.
- Do not use this unit in excessively humid or wet environments.
- Do not pull or place strain on the power cord when moving the appliance.
- IF THE POWER CORD IS DAMAGED, IT MUST BE REPLACED BY AN ELECTRICIAN OR SPECIALIZED TECHNICIAN AUTHORIZED BY THE MANUFACTURER IN ORDER TO PREVENT FIRE.

FOR MAXIMUM EFFICIENCY


- Do not exceed the recommended room size.
- Make sure doors and windows are closed while the portable air conditioner is in use. Also keep curtains and blinds closed during the sunniest parts of the day while the air conditioner is in operation.
- Frequently clean the portable air conditioner's filters.
- Once the room or area has reached the desired temperature, be sure to adjust
- unit's temperature and fan settings.


PRODUCT FEATURES


- 1. Control panel
- 2. Air outlet
- 3. Carrying handle
- 4. Caster
- 5. Cord storage
- 6. Air filter
- 7. Air inlet
- 8. Exhaust air outlet

- 9. Air inlet
- 10. Rubber plug/ drainage point
- 11. Hose adaptor (goes over the hose and into the window kit)
- 12. Exhaust hose
- 13. Extendable window kit
- 14. Active carbon filter
- 15. Drain tube for continuous drainage
- 16. Remote control












Notes:

- 1. The heating function is only available in the AC-10100H model.
- 2. The data marked with '*' may vary for technical reasons; for more accurate data, please refer to the rating label found on the back of the unit.


3. Measuring condition for the above specifications:

- * D.B. = dry bulb temperature= room temperature
- * W.B. = wet bulb temperature= relative humidity
- * If you plug In the Air Conditioner, and there is no green light on the plug, press the reset button on the LCDI plug. The green light should be lit, indicating that the air conditioner is getting power from the electrical outlet

If the plug continues to trip (which is a USA national safety standard future) and the green light goes off, the cord may be damaged preventing you from resetting the unit. For your safety, contact a licensed electrician.




ASSEMBLY & INSTALLATION

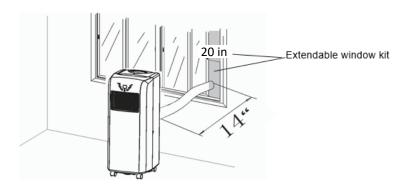

- 1. Open the window and insert the window kit into the open gap.
- 2. Close the window until the window kit is held securely. You may need to adjust the size of the window kit and secure it with screws. This technique may also be used for sash windows.
- Fit the exhaust hose into the exhaust air outlet located on the back of the air conditioner.
- 4. Attach one end of the hose adapter onto the exhaust hose.
- 5. Attach the other end of the hose adapter to the window kit.

Mounting of the Exhaust Pipe


- Only use the hose provided and clip exhaust hose to the back of the air conditioner.
- Avoid kinks and bends in the exhaust hose. This can cause humid air to accumulate, causing the unit to overheat and shut down.
- The exhaust hose may be extended from 12 inches (300mm) to 59 inches (1500mm), but for maximum cooling efficiency use the shortest length possible.



newair.com


WARNING!

The included exhaust hose is specifically designed to fit the specifications of this unit. Do not extend it with your own hose, as this can cause the air conditioner to malfunction.



Installation of the Carbon Filter


1.	Remove the filter frame from the unit.
2.	Separate the filter fixer from the filter frame.
3.	Remove the activated carbon filter from its plastic bag.

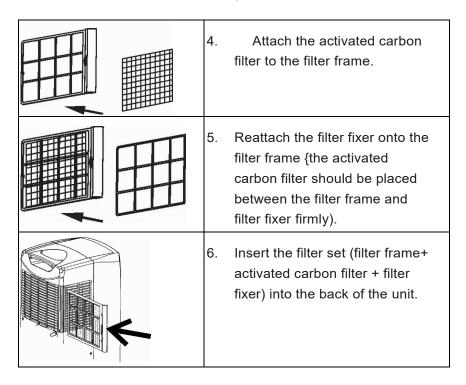

OPERATION

CONTROL PANEL

Control panel

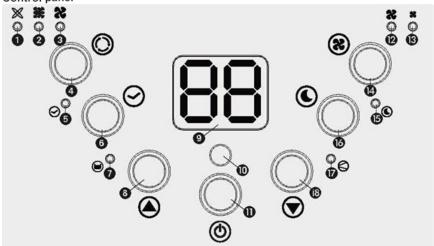

- 1. Automatic mode indicator
- 2. Cooling mode indicator
- 3. Fan (ventilation) mode indicator
- 4. Mode selection button indicator
- 5. Timer operation
- 6. Timer button
- 7. Full water tank indicator
- 8. Temperature increase button
- 9. Display window

- 10. Remote control receiver
- 11. ON/OFF (POWER) BUTTON
- 12. High fan speed indicator
- 13. Low fan speed indicator
- 14. Fan speed (ventilation) button
- 15. Sleep mode indicator
- 16. Sleep button
- 17. Compressor indicator
- 18. Temperature decrease button

Turning the Unit On and Off:

1. Press the ON/OFF button. The unit will start automatically:

For cooling only model: AC-10100E

- R.T. (room temperature) $\geq 75^{\circ}F \rightarrow$ the unit will work in cooling mode
- R.T. $< 75^{\circ}$ F \rightarrow the unit will work in fan mode

For cooling & heating model: AC-10100H

- R.T. (room temperature) $\geq 75^{\circ} \text{ F} \rightarrow \text{ the unit will work in cooling mode}$
- 68 °F < R.T. < 75° F \rightarrow the unit will work in fan mode
- R.T. $< 68^{\circ} \text{ F} \rightarrow \text{ the unit will work in heating mode}$
- 2. At this time, the indicator lights will show any functions that are in progress. Please note that the display window will only show ambient room temperatures ranging from 32°F TO 122°F (0°C to 50°C).
- 3. To turn the unit off, press ON/OFF button again.

Setting the Model/Function:

Press the MODE button to select the desired mode (cooling, fan or heating).

Setting Temperature

- 1. Press 'Temperature up' or 'Temperature down' button to change the set temperature.
- 2. The display window will indicate the set temperature. If not, the temperature displayed will show the ambient room temperature.
- 3. Please note that the preset temperatures are as follows:

Cooling: 75°F (24°C) Heating: 68°F (20°C)

Setting Fan Speed:

- 1. Press the SPEED button to select the desired fan speed (high or low). The indicator light will display the fan speed selected.
- If the unit is in the AUTO mode, it will choose the fan speed automatically according to the ambient temperature (the related indicators will light on).
 In the AUTO mode the fan speed cannot be changed manually.

Setting Timer

- Press the TIMER button to set the desired number of operating hours (from 1 to 12 hours). When the set time has been reached, the machine will turn off automatically. The display window will show the hour(s) you set as you press the TIMER button. If the TIMER is not set, the unit will work continuously.
- By pressing the timer without turning on the other functions, you can PRE-SET the number of hours to be delayed before the unit turns on. For example, if you set the timer to "2", the unit will automatically turn on after 2 hours.

Sleep Function


- When in cooling mode, press the SLEEP button. The set temperature will increase 1°F on the 1st hour; another 1°F on the second hour, and then maintain that temperature.
- 2. When in heating mode, press the SLEEP button. The set temperature will decrease 1°F on the 1st hour; another 1°F on the second hour, and then maintain that temperature.
- In the sleep mode, the fan will automatically be set to low. By pressing the SLEEP button again, the set temperature and fan speed will revert back to the previous setting.
- 4. The unit will shut down automatically after it has been in sleep mode for 12 hours.
- Please note the sleep function is not available while the machine is working in AUTO or FAN (ventilation) mode. It will only work in cooling or heating mode.

Heating Function (For AC-10100H Only)

- When the air conditioner is in heating mode, ambient warm air is recycled and used to heat your immediate area. The exhaust pipe will still need to be fitted onto the unit in order for the cold air to be removed.
- 2. Continuous drain is compulsory while the unit is in heat mode. Working range for heating function is 45 to 77°F (7 ~ 25°C). If the ambient temperature is lower than this range, the unit may not work properly.

All the functions can also be performed with the supplied remote control. The remote control requires 2 AAA batteries to operate.

Regulating air flow direction



Move the air vent directly to adjust the air flow direction of the louvers.

Please Note:

- 1. To prolong the life of the compressor, after turning off the unit, please wait at least 3 minutes before turning it back on.
- The cooling system will turn off if the ambient temperature is lower than
 the set temperature. However, the fan will continue operating at the set
 level. Once the ambient temperature rises above the set temperature,
 cooling will resume.
- The heating system will turn off if the ambient temperature is higher than
 the set temperature. The ventilation fan will continue operating at the set
 level. Once the ambient temperature drops below the set temperature,
 heating will resume.
- 4. This machine is equipped with ANTI-FROST function. When using the heating function in low temperature the heater will occasionally stop heating in order to melt any frost that has accumulated within the air conditioner. Normal operation will resume in a few moments.

CLEANING & MAINTENANCE


DRAINING THE UNIT

During the cooling process, some water will be extracted from the air and stored within the unit's water reservoir.

If the reservoir is full, both the compressor and motor will stop and the unit will beep (press any button to stop the beeping sound). The full water tank indicator light will also start flashing.


To resume cooling, empty the reservoir by following these steps:

- 1. Turn off the air conditioner and unplug it from the wall socket. To prevent water leakage, avoid moving the unit when full.
- 2. Place a container (such as a small pan) underneath the drain hole.
- 3. Remove the drain knob & rubber plug from the drain hole and allow the water to drain out.
- 4. When the container is almost full, replace the rubber plug in the drain hole and empty the water tray.
- 5. Repeat until the unit is emptied.
- 6. Replace the rubber plug and make sure it is firmly in place.
- 7. Turn the unit back on. The full tank indicator light should turn off.




For Continuous Drainage:

- Remove the drain knob and rubber plug from the drainage port and hold on to them for future use.
- Connect the drain tube to the water outlet as shown. Place the other end
 of drain tube into a drain.




 The drain tube may be extended by adding an extension tube with a suitable connector.



Please Note:

- 1. The drain must be at or below the level of the drainage port.
- 2. The full water tank indicator light will not work when the unit is being continuously drained.
- 3. To extend the drain tube, you can connect it with another hose with an overall diameter of approximately 0.7" (18mm).



newair.com

MAINTENANCE

Always unplug the air conditioner from the power supply before cleaning. To maximize the efficiency of the air conditioner, regularly clean the unit.

Cleaning the Housing:


- Use a soft, damp cloth to wipe the body clean.
- Never use aggressive chemicals, gasoline, detergents, chemically treated cloths, or other cleansing solutions. These all could possibly damage the cabinet.

Cleaning the Filter:

- Use a vacuum cleaner or tap the filter lightly to remove loose dust and dirt from the filters. Rinse thoroughly under running water (no hotter than 104°F or 40°C).
- Thoroughly dry the filter before replacing it back into the unit.
- PLEASE NOTE: NEVER USE THE UNIT WITHOUT THE AIR FILTER.

End of Season Storage:

- Completely drain any condensed water from the unit.
- Set the air conditioner on fan mode (ventilation only) for a few hours to dry the inside of the unit.
- Clean or change the filter.
- Unplug and store the power cord as shown.
- Place the unit back in its original carton and store it in a clean, dry area.



TROUBLESHOOTING

ISSUE	CAUSE & SOLUTION		
The air conditioner	Is the air conditioner plugged in?		
does not run.	Is the power outlet functioning correctly?		
	Is the full water tank indicator light flashing?		
	Is the ambient room temperature lower than the		
	set temperature?		
The unit does not	Is the unit placed in direct sunlight? If so, close any		
produce enough	curtains or move the unit to a more shaded area.		
cooling.	Are too many windows or doors open?		
	Are there too many people in the room?		
	Are there additional heat sources in the room?		
The unit does not cool	Is the filter dusty or dirty?		
at all.	Is the air inlet or air outlet blocked?		
	Is the ambient room temperature lower than the		
	set temperature?		
The unit is noisy.	Is the machine positioned unevenly? Make sure		
	the air conditioner is positioned on an even, solid		
	surface.		
The compressor does	It is possible the overheat protection of the		
not work.	compressor is on. If so, wait for the temperature to		
	drop and then turn on the unit again.		

^{*} NEVER TRY TO REPAIR OR DISMANTLE THE UNIT YOURSELF. UNAUTHORIZED REPAIRS CAN VOID YOUR WARRANTY AND ENDANGER THE UNIT.

LIMITED MANUFACTURER'S WARRANTY

This appliance is covered by a limited manufacturer's warranty. For one year from the original date of purchase, the manufacturer will repair or replace any parts of this appliance that prove to be defective in materials and workmanship, provided the appliance has been used under normal operating conditions as intended by the manufacturer.

Warranty Terms:

During the first year, any components of this appliance found to be defective due to materials or workmanship will be repaired or replaced, at the manufacturer's discretion, at no charge to the original purchaser. The purchaser will be responsible for any removal or transportation costs.

Warranty Exclusions:

The warranty will not apply if the damage is caused by any of the following:

- Power failure
- Damage in transit or when moving the appliance
- Improper power supply such as low voltage, defective household wiring or inadequate fuses
- Accident, alteration, misuse, or abuse of the appliance such as using non-approved accessories, inadequate air circulation in the room or abnormal operating conditions (extreme temperatures)
- Use in commercial or industrial applications
- Fire, water damage, theft, war, riot, hostility or acts of God such as hurricanes, floods, etc.
- Use of force or damage caused by external influences
- Partially or completely dismantled appliances
- Excess wear and tear by the user

Obtaining Service:

When making a warranty claim, please have the original bill of purchase with the purchase date available. Once confirmed that your appliance is eligible for warranty service, all repairs will be performed by a NewAir™ authorized repair facility. The purchaser will be responsible for any removal or transportation costs. Replacement parts and/or units will be new, remanufactured or refurbished and is subject to the manufacturer's discretion. For technical support and warranty service, please email support@newair.com