



## INSTALLATION INSTRUCTIONS

# DRAIN-THRU FLOOR TILE

## LIFE ORGANIZED

Montezuma is committed to helping you succeed in both your work and personal life by being organized, prepared and equipped with the right tools, gear and home supplies at your finger tips.

We are here to ensure that your life is organized.

Thank you for your purchase of this Montezuma Garage Flooring.

## INSTALLATION INSTRUCTIONS

GO TO [WWW.MONTEZUMASTORAGE.COM](http://WWW.MONTEZUMASTORAGE.COM) TO WATCH OUR HOW-TO VIDEOS EXPLAINING HOW TO INSTALL AND CLEAN OUR GARAGE FLOORING.

### PREPARATION

Clear the subfloor of any removable objects and or items. Sweep or vacuum any excess dirt and debris.

**WARNING: DO NOT WALK ON TILES THAT ARE NOT INTERLOCKED AS THEY CAN BE A SLIPPING HAZARD. WHEN INSTALLING YOUR FLOOR, BE CAUTIOUS OF TILES PLACED ON TOP OF ONE ANOTHER.**

### INSTALLATION OF FIRST TILE

Facing your garage door opening, place the first tile in the top left corner with the pegged "male" sides facing the left and top.


NOTE: A minimum expansion gap of 1/4" (6.35 mm) should be left at the walls and/or any other immovable objects such as cabinets, vehicle lifts or support beams.

### INSTALLATION OF ROWS 1-3

Working left to right, interlock the second tile into the first tile, making sure that loops and pegs are facing the same direction.

Continue interlocking tiles until the desired width of first row is complete.

Begin your second row and continue interlocking tiles until the end of the third row has been reached.

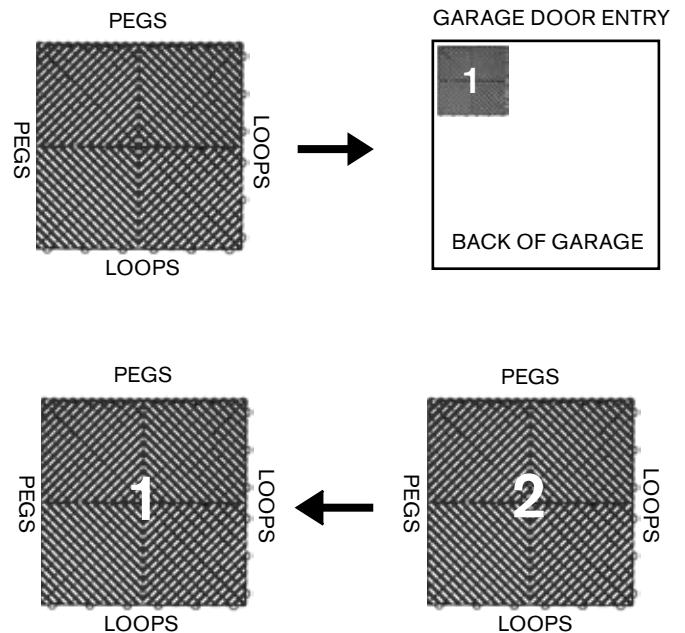

# ATTACHMENT OF EDGES


NOTE: Edges are only needed between the garage door rails.

Complete the first three rows, then connect edges to the first installed row nearest to the garage door entry. Then position the first three rows of interlocked tiles and edges against the closed garage door for a precise fit.

**LOOPED EDGE:** Lift up tile and align the looped edge with the pegs of the tile and snap into place.

**PEGGED EDGE:** Align the pegged edge over the looped side of the tile and snap into place.

NOTE: If you have an elevated garage lip, please allow 2" (50.8 mm) of space between lip and edges. This will ensure even pressure and a secure floor every time you enter or exit your garage.

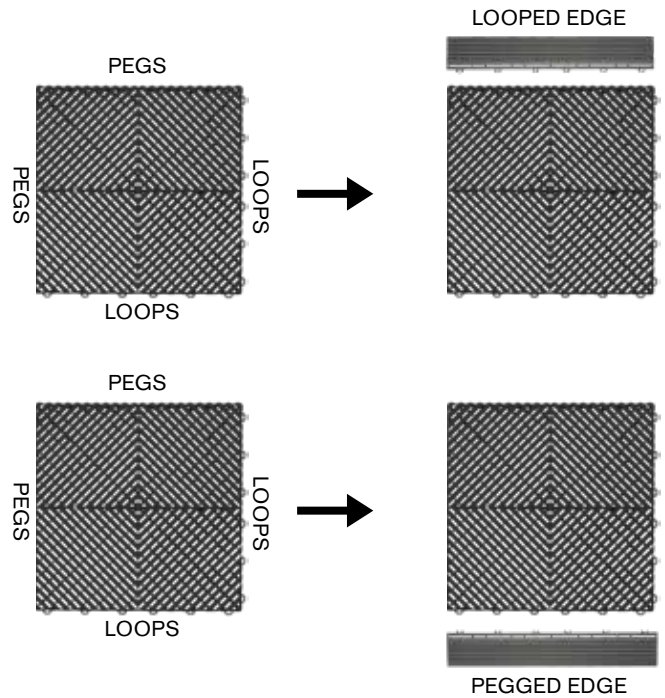


# COMPLETION OF FLOOR

Continue on with the remaining rows until the desired length is reached.

NOTE: Cutting may be necessary along the back wall to complete install! Use an electrical saw such as a circular saw, jig saw or table saw. A fine toothed blade with more than 80 teeth is recommended.

NOTE: When cutting tiles, position tiles accordingly to ensure they interlock with the rest of your installed flooring.

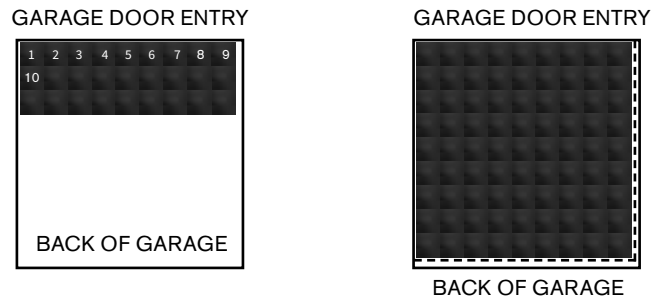

This product is warranted to be free from defects in materials and workmanship for a period of three (3) years from the date of original purchase.

If this product is defective, email [service@montezumastorage.com](mailto:service@montezumastorage.com) or call 1-800-459-4409 (Monday–Friday, 8:00 am–4:30 pm, CST). If the product is defective, we will replace the defective part at no cost to you. Please do not ship your product back to the store or to us unless we send you written instructions for return.

In the event it becomes necessary for your product to be returned, we will notify you how to proceed. A copy of your original purchase receipt must accompany the returned product.

Distributed by:

**QUALITY CRAFT** Surrey, BC, Canada V3S 5N4

[service@montezumastorage.com](mailto:service@montezumastorage.com) | 1-800-459-4409 (Monday to Friday, 8:00 am–4:30 pm, CST)

MZRS-11/18