

Part no. ANT-LTE-02-06



(I) Product Overview

Frequency (MHz) : 698-960/1710-2170/2500-2700

VSWR \leq 2.0

Gain (dBi) : 5

Max Input power (W) : 50

Input Impedance (Ω) : 50

Polarization : Vertical

Antenna Length (mm) : 171

Connector : SMA Rotation male

Storage Temperature : -30°C to+85°C


Operating Temperature : -30°C to+85°C




Contact us:

Email: info@elecomes.com


Tel: +61 468 468 128


(II) Mechanical

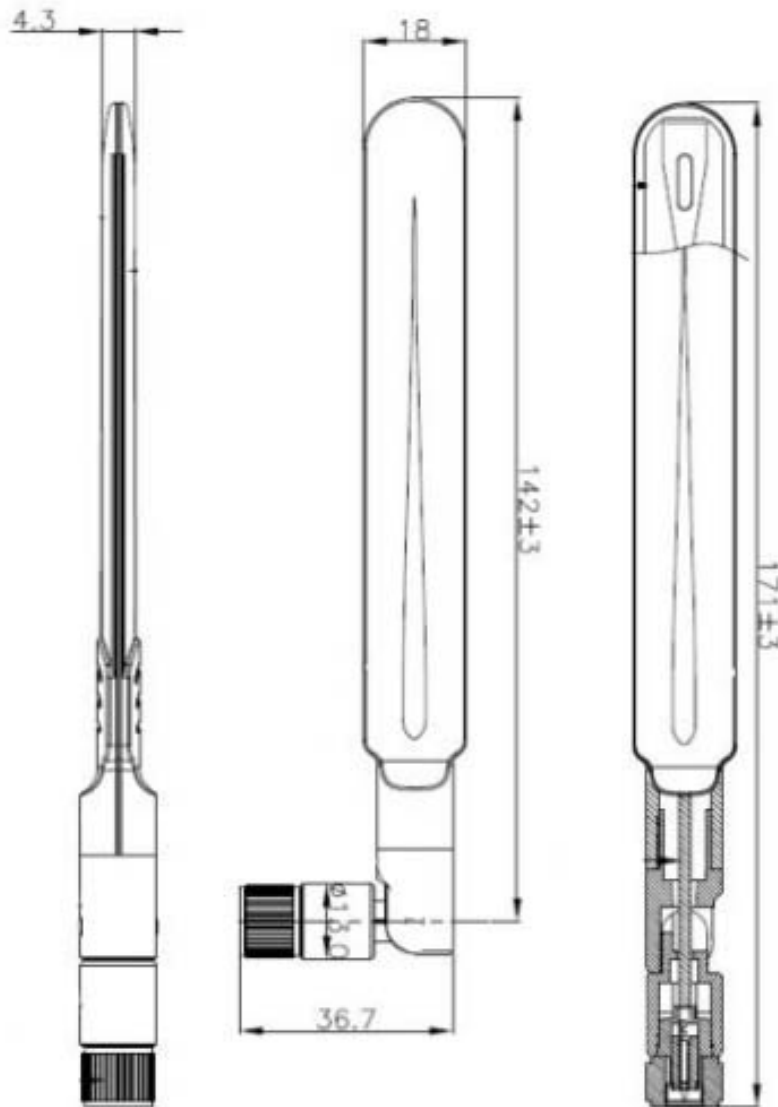

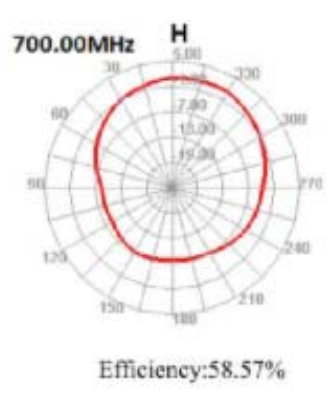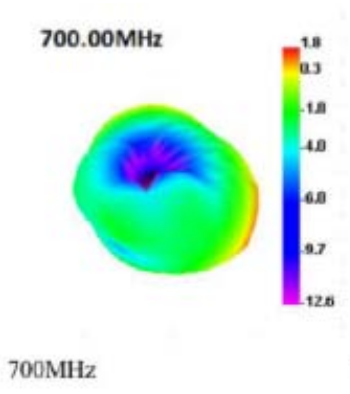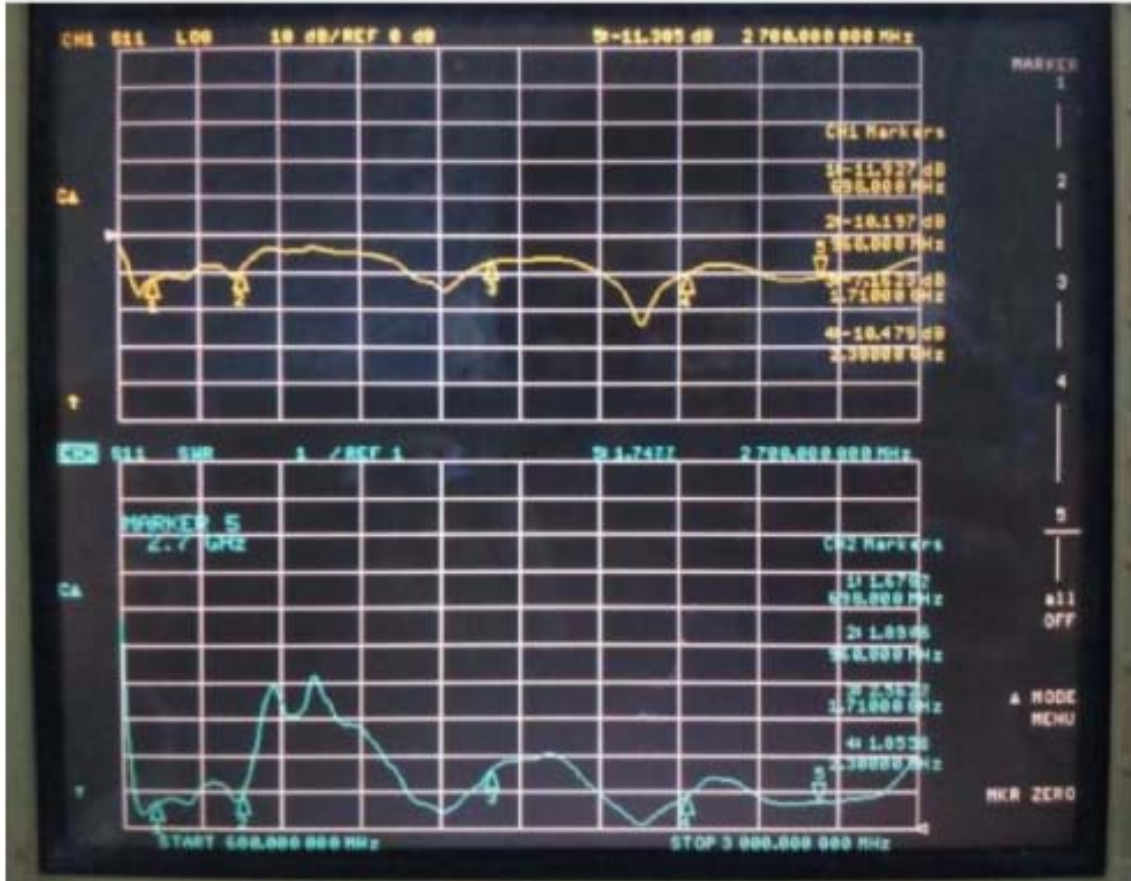


Contact us:
Email: info@elecomes.com
Tel: +61 468 468 128

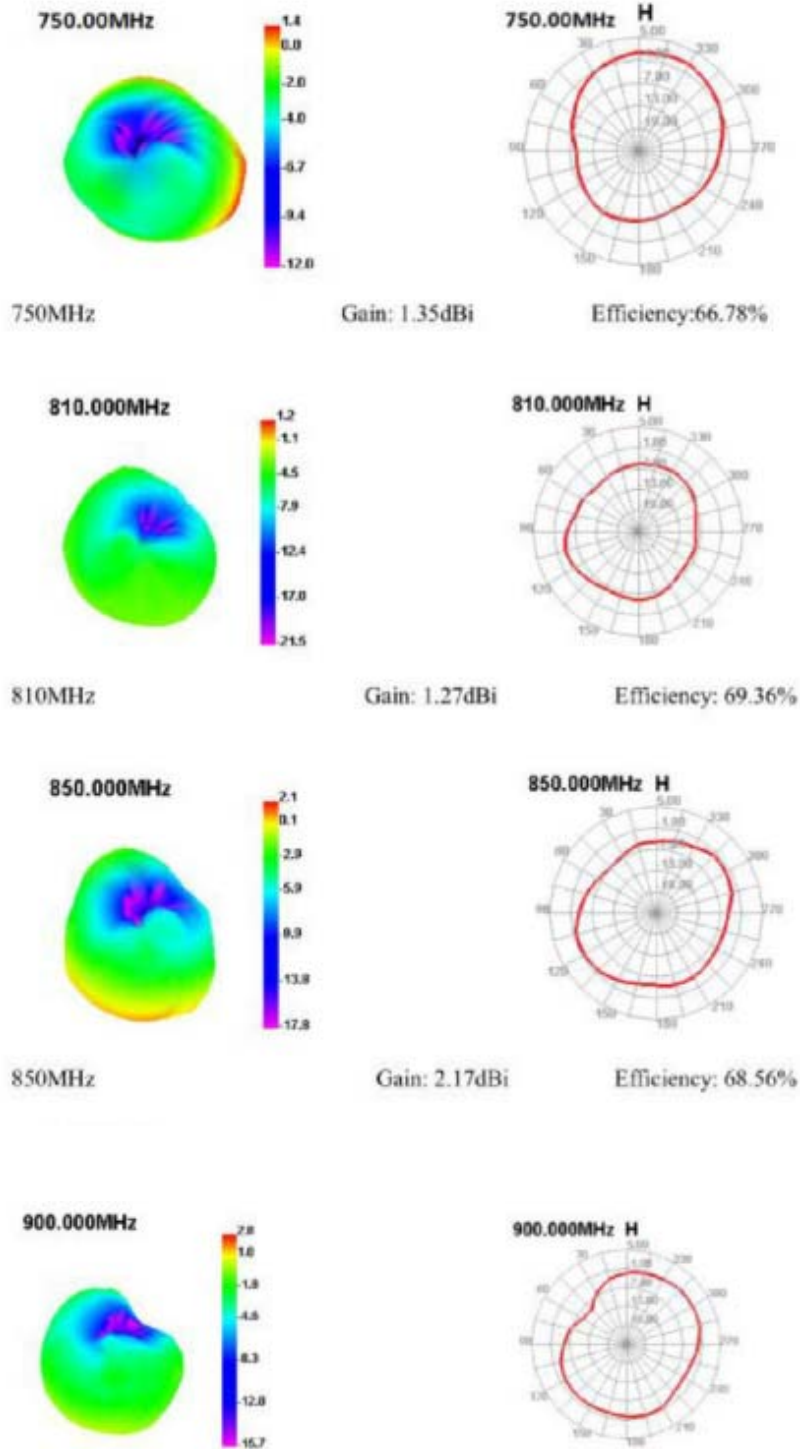




930MHz

Gain: 2.35dBi

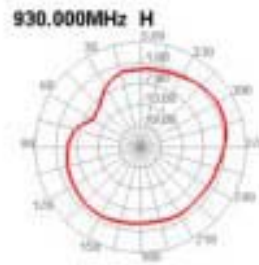


Efficiency: 68.23%




960MHz

Gain: 1.69dBi



Efficiency: 67.65%




1710MHz

Gain: 2.67dBi




Efficiency: 66.46%




1750MHz

Gain: 2.78dBi




Efficiency: 65.87%




1880MHz

Gain:2.97dBi




Efficiency: 67.53%




1920MHz

Gain:2.46dBi




Efficiency: 63.25%




2100MHz

Gain:3.13dBi




Efficiency: 64.28%




2170MHz


Gain:3.37dBi



Efficiency: 67.44%

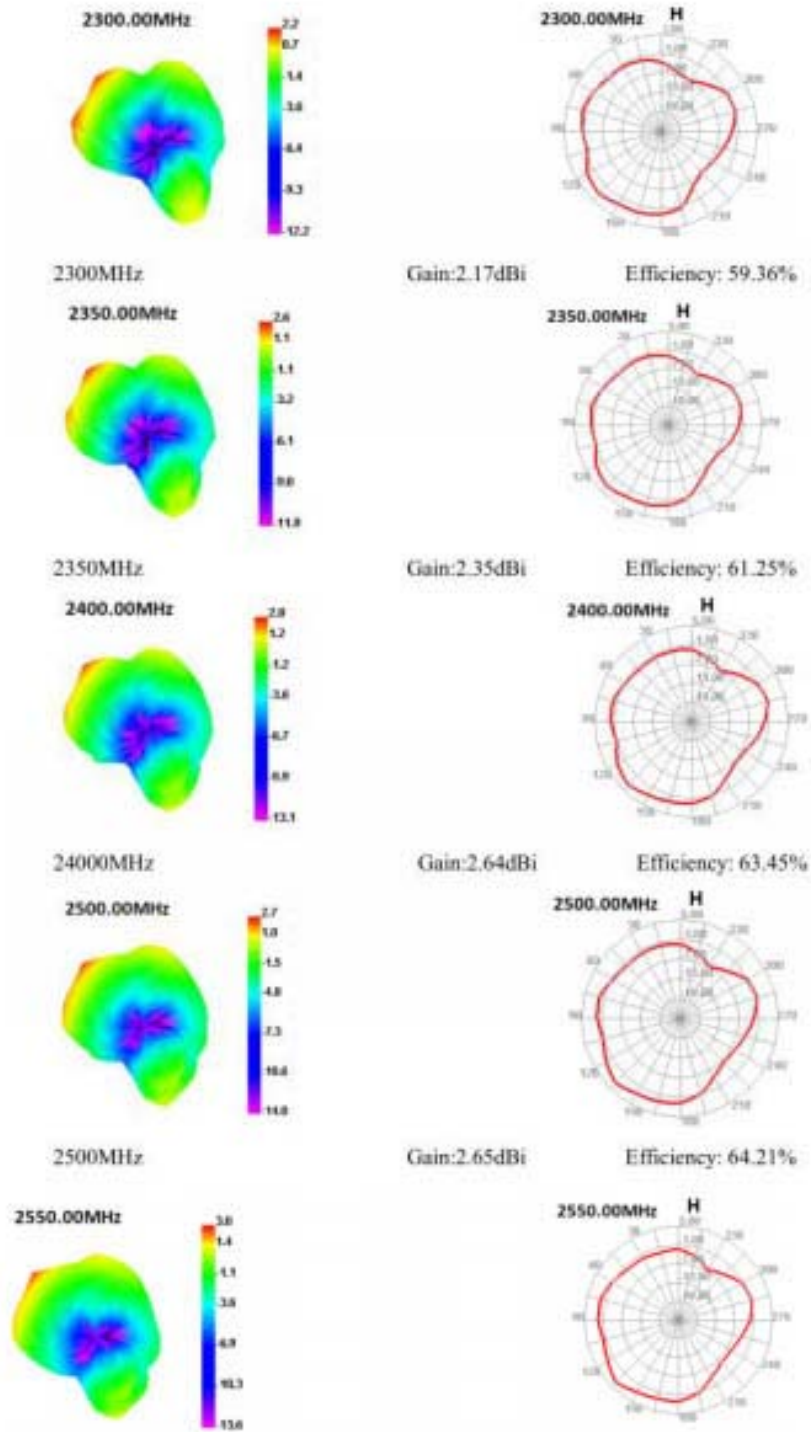


2550MHz




Gain:2.87dBi

Efficiency: 65.43%




2600MHz




Gain:2.68dBi

Efficiency: 64.56%

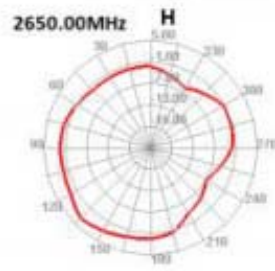


2650MHz




Gain:2.82dBi

Efficiency: 65.56%




2700MHz



Gain:2.51dBi

Efficiency: 64.79%



2750MHz

Gain:2.97dBi

Efficiency: 67.68%