RoHS

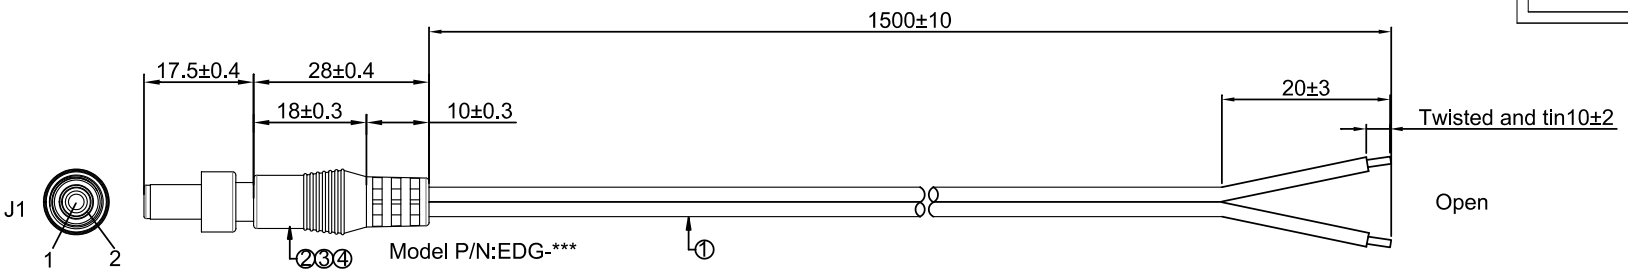



1.5M绕线

Pin-out diagram

From	Pin#		To
J1	1	Black W/Stripe	Open
J1	2	Black	Open

No	Material	Description	Qty	MNF.Name
1	Cable	UL2468 18AWG/2C(Black, Black W/Stripe) OD:2.2*4.4mm	1Pc	WenChang
2	Connector	DC Plug, 5.5*2.5*BL7.5*L30mm Locking style, brass minkel plated,threaded nut 5/16-32, P/N:5525C300-3T00-R7-7.5	1Pc	HuangJi
3	Pre-mold	Transparent PE material	10g	BoLing
4	Over-mold	Shore A 90 Black PVC	30g	BoLing
5	Cable Tie	Cable Tie; Color:Black	1Pc	XinBao

Electrical Properties:
1.It should have no open connections,
Miswiring, or intermittent failures;
2.The cable shall be 100% electrically tested;

REV	DATE	REVISE CONTENT
1	2016/06/07	New drawing
2	2016/08/11	The tail cut change bifurcate twist plating

1:UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN UNITS TOLERANCE ARE AS DWG

2:ALL DIMENSIONS ARE "mm"

PAGE	1:1	P/N	ELE-MT-DC150-CN	DWG	Y.Li	DATE	2016/08/11
		DWG NO	YZT-06061600592	CHK	Y.Zhou	DATE	2016/08/11
				APP	Lee	DATE	2016/08/11