

Sunmoon Battery

ER17505

Lithium Thionyl Chloride Battery [Bobbin Type]
Li/SOCI₂ 3.6V



• Electrical Specification

Nominal Capacity[1mA~2V]	3.6Ah
<i>The discharge capacity of battery depends on the environment temperature and the terminated voltage of the battery.</i>	
Nominal Voltage	3.6V
Maximum Continuous Current	70mA
Maximum Pulse Current	150mA
<i>Under temperature of 23±2°C, the battery starts to discharge with 10µA base current. The battery releases one pulse 150mA/0.1secs every 2 minutes during its discharging and the battery voltage shall not be less than 2.7V. The voltage value depends on pulse characteristics, temperature and the usage of the batteries.</i>	
Weight	24g
Operating Temperature	-55°C ~ +85°C

• Advantages

- High energy density over 620wh/kg [highest among all the chemical batteries]
- Open circuit voltage ≥ 3.65V, and operating voltage ranging from 3.3~3.6V
- Wide operating temperature range: -55°C ~ +85°C
- Long storage life over 10 years [under normal room temperature]
- Suitable to operate under long-term tiny current with stable voltage

• Main Applications



Wuhan Sunmoon Battery Co., Ltd.

Tel: +86-27-84732116 84730089

Add: No.231, Xingsan Road, Hannan District, Wuhan, Hubei Province, China

Post: 430090

Web: www.sunmoonbat.com


Email: info@sunmoonbat.com

Sunmoon Battery ER17505


**Lithium Thionyl Chloride Battery [Bobbin Type]
Li/SOCI₂ 3.6V**




Typical Discharge Profiles at +23±2°C

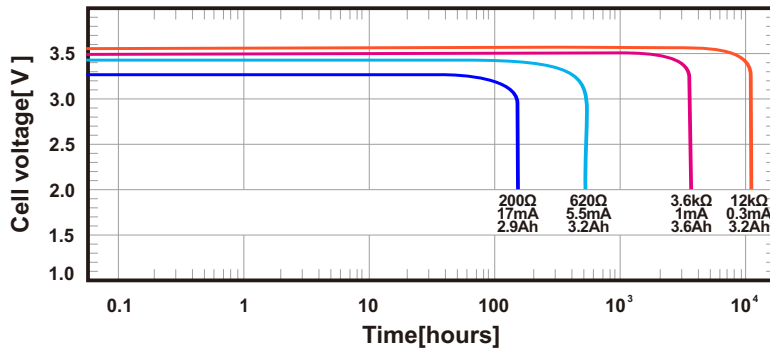


Restored Capacity Versus
Current and Temperature [2.0V cut-off]

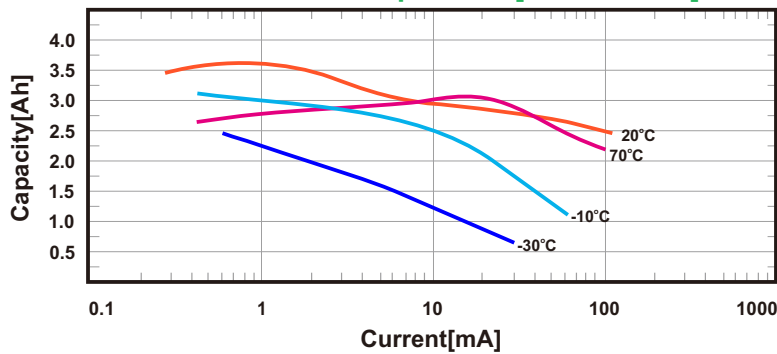

Voltage Plateau Versus
Current and Temperature

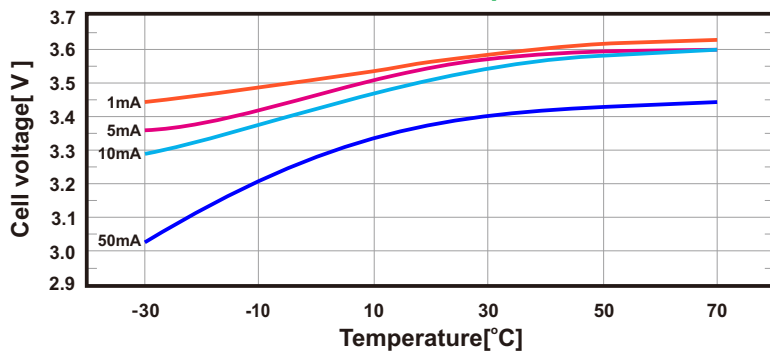

4.5Max

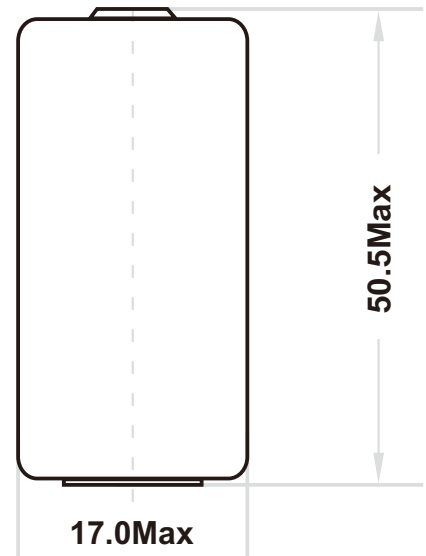

17.0Max


Available Terminations

- S: Standard Termination
- T: Solder Tabs
- P: Axial Pins
- Customized terminations are available

Warning

- Do not expose the battery to open flame, inflammable and explosive articles.
- Do not recharge, short-circuit, disassemble, incinerate the battery or heat the battery to more than 100°C.
- Do not use the battery beyond the permitted temperature range.

Distributed by:



Elecom Electronics Supply

Design. Come True.

Email: info@elecomes.com

Notes:

Brochure concerning performance are for information purposes only for fresh batteries. Information in this document is subject to change without notice. Sunmoon's statement in its sales contract or order confirmation form is the only warranty offered by Sunmoon.