


## CHAUCER Horizontal Fitting Instructions


Steel Radiator in White RAL 9016  
25mm Round Tube, 35mm Round Collectors

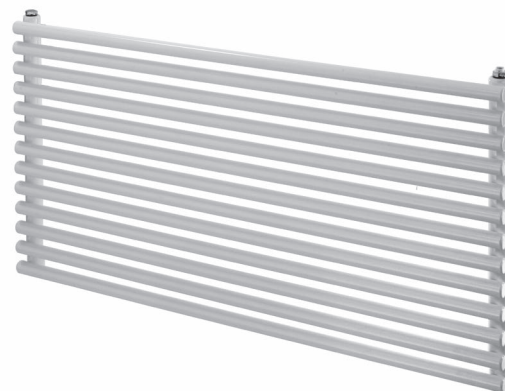


Please read these instructions and terms and conditions carefully prior to installation. Failure to do so may invalidate the warranty.

### Drawings

Drawing 1 - Brackets

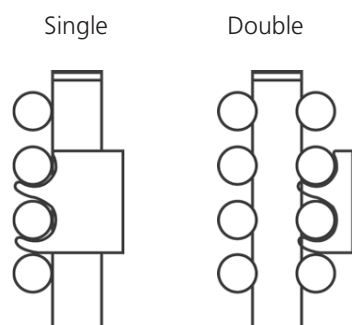

Drawing 2 - Bracket Positions

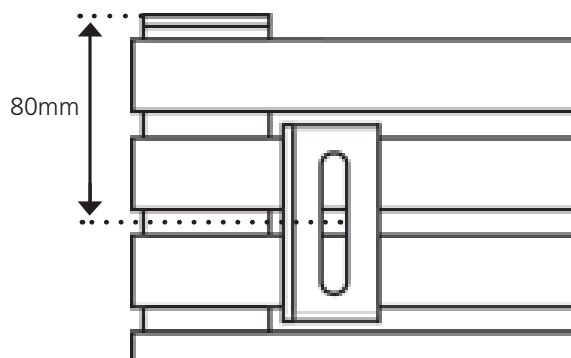

### Pipe Centres

		Single	Double
Pipe centres left to right	=	width minus 40mm	width minus 40mm
Pipe centres from wall	=	54mm	54mm
Depth from wall	=	94mm	94mm

### 1. Unpack & Inspect

This product should have reached you in perfect condition. Please carefully unpack and inspect this radiator and all fittings. Your point of purchase must be notified of any shortages or damage within 28 days of delivery. For further information please see terms and conditions on reverse.

## 2. Contents

You should have:

- 1 Radiator
- 4 Wall Brackets
- 1 Manual Airvent
- 1 Blanking Plug

You will need:

- Tape measure
- Electric drill and bits
- Spirit level

## 3. Mark Bracket Positions

The fixing positions for the two top brackets are measured down 80mm and spaced left to right as required along the cross tubes within the collectors (please see drawing 2 on other page).

In order to accurately mark the bottom bracket fixing positions mark, fix and level the two top brackets first. Then hang the radiator, ensuring it is level and manually hold the bottom brackets in position while marking.

## 4. Fix Brackets

Using a suitable drill bit, screws and plugs, fix the brackets and level with a spirit level.

**PLEASE NOTE:**

It is essential that all brackets are level and square prior to hanging the radiator to ensure a vertical alignment for connecting the pipework.

## 5. Identify & Remove Diverter

The factory fitted diverter can be identified by a sticker that says 'Diaframma' which can be found on the underside of one collector. This Diverter must be removed prior to installing the radiator by inserting a long handled screw driver or similar implement and breaking out the perforated disc. To prevent damage to the heating system this disc must be completely removed from the radiator.

## 6. Hang & Commission Radiator

With the brackets firmly fixed and level, the radiator is lowered directly onto the brackets.

When commissioning your radiator on an indirect/closed system we recommend using a suitable mixed metal inhibitor to protect against scale & corrosion.

**Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.**

**PLEASE NOTE:** Systems using micro bore pipe work must have adequate pressure and flow rates for the number and style of radiators on the system.

---

## Technical Specifications

<b>Materials</b>	Steel.
<b>Connections</b>	½" flow and return.
<b>Test pressure</b>	13 Bar
<b>Testing authority</b>	EN442
<b>Maximum operating pressure</b>	10 Bar
<b>Maximum working temperature</b>	As to EN442 Δt 80°C
<b>Packaging</b>	Polystyrene protection within cardboard box.

## Guarantees & Liabilities

This product is guaranteed for 5 years. As we are not the manufacturers of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturer.

The guarantees in all cases are subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to us.

## Terms & Conditions

All products must be inspected once removed from the packaging and your point of purchase notified within 28 days of delivery of any scratches, blemishes or other damage. Your point of purchase will then agree appropriate action. Imperfect radiators should therefore not be fitted and we will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If we are not notified within 28 days of the date on the signed delivery note then it will be deemed that we have fully complied with our obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims. We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation, we cannot accept responsibility for items damaged after delivery.

For full details of our Terms and Conditions please visit [www.supplies4heat.co.uk](http://www.supplies4heat.co.uk) or call us on 01342 306880.