


Small, No Back, Adjustable Shelf





Adult assembly only 2 Adults required for assembly Assemble completely before use

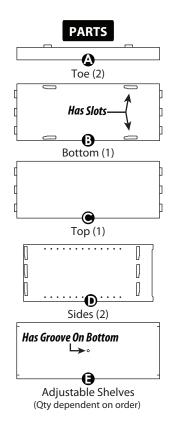



BEFORE YOU START

Glue helps make this shelving unit rigid and it's drying also makes this assembly time-sensitive. To help the process go smoothly, **read all instructions before proceeding.**



2 people required for assembly. Assemble on a hard floor.




REQUIRED: Wood glue is used to permanently attach the shelving pieces together.
This adds additional rigidity to the unit.
Using other glue types may affect curing and workablity time.








When inserting tabs into slots make sure the side with the wider lip on the tab faces the same direction as the notch in the slot.






Tab will 'pop' into slot when force is applied.





REQUIRED: For steps using glue, apply a pea-sized amount to the thin end of slots. With the tabs orented vertically, apply a pea-sized amount at the top of each tab (inside its groove). The glue will run down and coat the rest of the tab during assembly.

Apply glue just before connecting pieces.








Talk to our customer service agent at: +1 (833) 530-0033

Or email us at:


support@sprout-kids.com Watch our assembly video at: sprout-kids.com/bmsa

ASSEMBLY INSTRUCTIONS

Push tabs on Toes **(A)** into slots on bottom **(B)**. Tabs and slots must be lined up correctly or they will not properly tighten. See **(A)** for tab orientation.




Turning the part upright, push down on Toes **(A)** until the ends are flush with the ends of Bottom Shelf **(B)**. Repeat with second toe.




A second adult is needed to hold shelves in place.

Refer to for tab orientation. Apply glue to slots on Side and tabs on Shelves and Bottom. Refer to . Pop tabs into corresponding slots.




Press or hammer down Shelves and Bottom to tighten until they make contact with the ground. They will be flush with the underside of Side Parts will be snug.


Remove excess glue from joints with a damp cloth. If unable to get parts to be flush with each other dissassemble immediately. Remove glue with a damp cloth and contact Customer Service.



One adult holds steady Side **①**, Shelves **②** and Bottom **③**. Apply glue to the tabs on **③** and **⑤** and the slots of the other Side **①**. Pop tabs into corresponding slots.




To tighten, press or hammer down the second Side **1** until it makes contact with the floor. Parts will be snug. Remove excess glue from joints with a damp cloth.




BRACKET INSTALLATION

Adult assembly only


▲ Drill/power screwdriver required for assembly




Tilt the assembled unit, minus the adjustable shelves, on its back.




Place one of the brackets into the corner on the underside of the shelf like so. The triangular face of the bracket should be against the toe piece.




Using a drill or power screwdriver, install 2 screws into the holes on the triangular face. There are no pre-drilled holes in the wood, so try to make the screws as straight as possible.



Install 2 more screws into the holes on one of the small sides of the bracket, then the other.

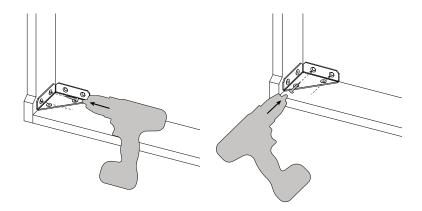

Repeat for the other 3 corners.
Allow glue to set for 1 hour before use.



SHELF INSTALLATION

Carefully set shelving unit upright. Remove excess glue with damp cloth. Check that everything is fully tightened.

Insert Pins (a) into holes at desired height. Place Adjustable shelf (b) on pins.



DOCUMENT: AI-B.2-NoBack WWW.SPROUT-KIDS.COM COPYRIGHT QUARK ENTERPRISES 2022 PAGE 7 OF 8

