



Tall, Narrow Back, Adjustable Shelf





Adult assembly only 2 Adults required for assembly Assemble completely before use

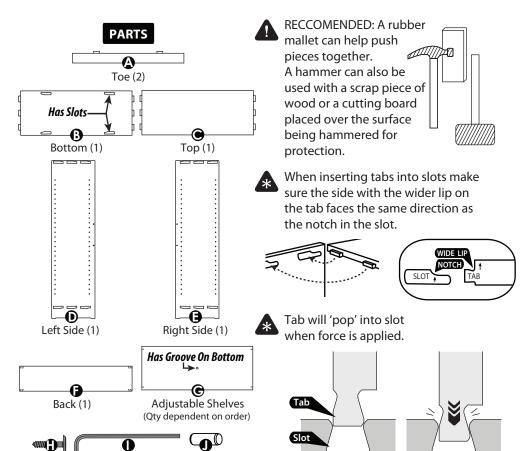

BEFORE YOU START

Allen Wrench

Glue helps make this shelving unit rigid and it's drying also makes this assembly time-sensitive. To help the process go smoothly, read all instructions before proceeding.



2 people required for assembly. Assemble on a hard floor.



REQUIRED: Wood glue is used to permanently attach the shelving pieces together.
This adds additional rigidity to the unit.
Using other glue types may affect curing and workablity time.





Λ

Shelf Pins

REQUIRED: For steps using glue, apply a pea-sized amount to the thin end of slots. With the tabs orented vertically, apply a pea-sized amount at the top of each tab (inside its groove). The glue will run down and coat the rest of the tab during assembly.

Apply glue just before connecting pieces.







Talk to our customer service agent at:


+1 (833) 530-0033

Or email us at:


support@sprout-kids.com Watch our assembly video at: sprout-kids.com/bmsa

ASSEMBLY INSTRUCTIONS


Push tabs on Toes **(a)** into slots on Bottom **(b)**. Tabs and slots must be lined up correctly or they will not properly tighten. See **(a)** for tab orientation.



Turning the part upright, push down on Toes **(A)** until the ends are flush with the ends of Bottom **(B)**. Repeat with second Toe.




A second adult is needed to hold parts in place. Refer to for tab orientation. Apply glue to slots on Left Side and tabs on Top and Bottom . Refer to for glue. Pop tabs into corresponding slots.

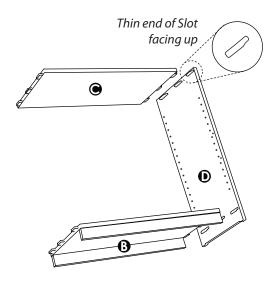


Press or hammer down Left Side **①** to tighten until it makes contact with the ground. It will be flush with the underside of Top **②** and Bottom **③**. Parts will be snug. Remove excess glue from joints with a damp cloth.


If unable to get parts to be flush with each other dissassemble immediately. Remove glue with a damp cloth and contact Customer Service.

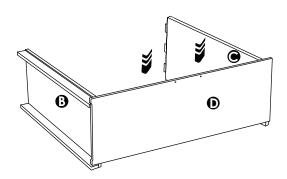


Have one adult hold Side ①, Top ② and Bottom ③ steady. Apply glue to the tabs on ② and ③ and the slots of Right Side ⑤. Pop tabs into corresponding slots.

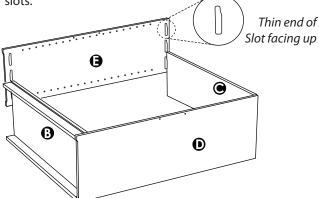

To tighten, press or hammer down Right Side (a) until it makes contact with the floor. Parts will be snug. Remove excess glue from joints with a damp cloth.



Carefully tilt unit up on Bottom 3. Install Back by aligning with pilot holes on Sides. Thread Screw through pilot holes with provided Allen Wrench 1.




DOCUMENT: AI-B.2-NoBack WWW.SPROUT-KIDS.COM COPYRIGHT QUARK ENTERPRISES 2022 PAGE 5 OF 8

BRACKET INSTALLATION

▲ Adult assembly only


▲ Drill/power screwdriver required for assembly




Bracket (4)

Screw (24)


Tilt the assembled unit, minus the adjustable shelves, on its back.




2 Place one of the brackets into the corner on the underside of the shelf like so. The triangular face of the bracket should be against the toe piece.




3 Using a drill or power screwdriver, install 2 screws into the holes on the triangular face. Make the screws as straight as possible.



Install 2 more screws into the holes on one of the small sides of the bracket, then the other.

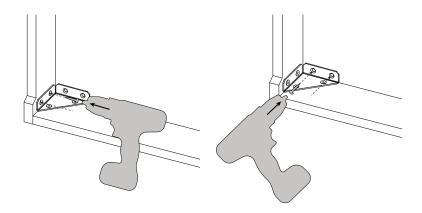

Repeat for the other 3 corners.
Allow glue to set for 1 hour before use.



SHELF INSTALLATION

Carefully set shelving unit upright. Remove excess glue with damp cloth. Check that everything is fully tightened.

Insert Pins into holes at desired height. Place Adjustable Shelf on pins.



DOCUMENT: AI-B.2-NoBack WWW.SPROUT-KIDS.COM COPYRIGHT QUARK ENTERPRISES 2022 PAGE 7 OF 8

