





Parts

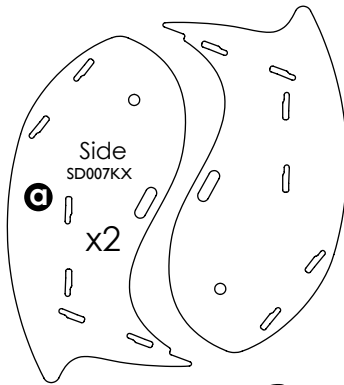


Instructions


1 Place Side **C** on ground or table. Put tabs of Tail **b** into corresponding slots on side **C**, grooves **W** facing outward. Press downward fully, then lock by pushing side **a** sideways until joint is tight.

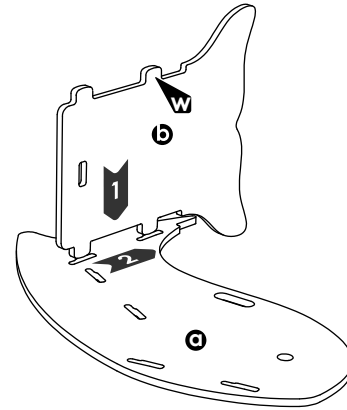


Note: Every tab has a groove on one side. Every slot has an indent. The groove in the tab needs to line up with the indent in the slot to work correctly.

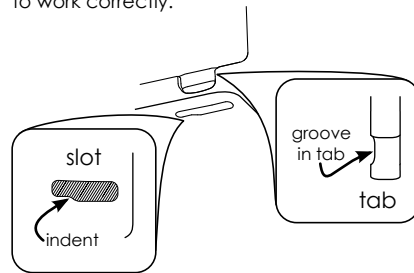

Note: Pressing the tabs together is what creates the Tension Lock. This will require some effort. **STAND UP, POSITION YOURSELF ABOVE THE JOINT AND USE YOUR WEIGHT TO PRESS DOWN.** Lock your arms if you need to for extra force.




Unlocked




Locked

The tabs need to be pressed almost to the end, as shown below.



2 Place seat **C** and footrest **C** into corresponding slots, with grooves **W** facing inward, but **do not lock**.

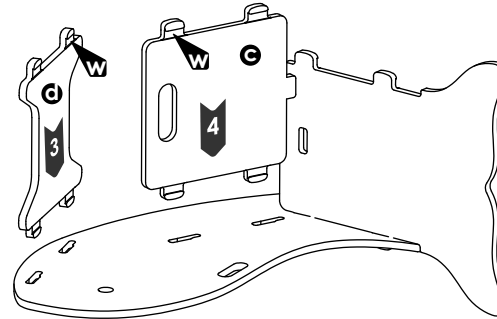

3 Place side **a** onto opposite tabs of tail **b**, seat **C** and footrest **C**. After every tab is in its corresponding slot, lock the tabs on tail **b** by pushing the tab into the groove.

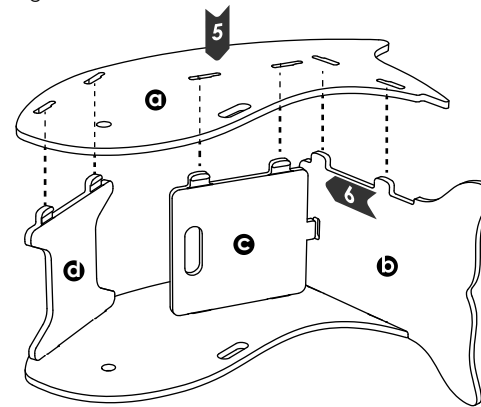

4 After locking the tabs on tail **b**, set the chair upright on its end, and push down on seat **C** and footrest **C** until the joints are locked tight.

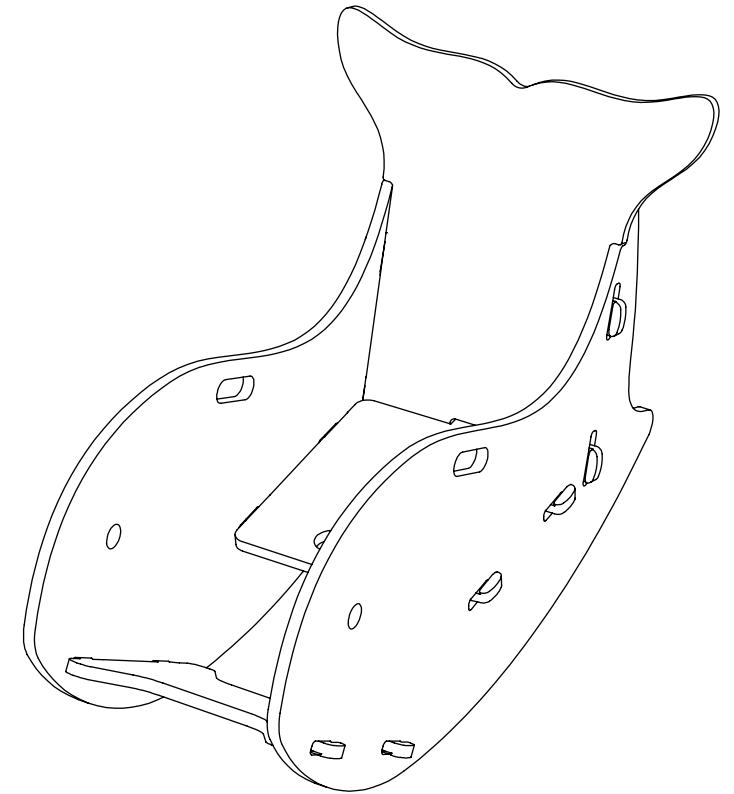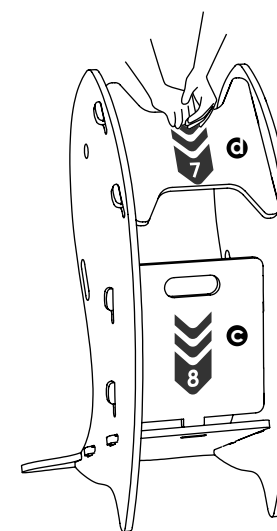


! If the furniture seems unstable, ensure that the Tension Lock tabs are completely pressed into place. If you have any concerns, contact us at: www.sprout-kids.com/contact

X Disassembly

To disassemble, carefully pull apart joints in opposite order as assembly, then take apart.

Need More Help?



Scan the QR Code or visit us online at www.sprout-kids.com for more ideas, assembly instructions, videos, to request replacement parts, and to see what's new at Sprout.

sqo.so/wca