




SURFACE/FLUSH PRESENCE DETECTOR, 360 DEGREES



55-461

Description	Colour	Model
Surface/Flush Presence Detector	White	55-461

- Manual overload
- Adjustable Time, Distance & Lux
- Built-in walk test function
- Dual element sensor
- Cutout diameter: 65mm
- polycarbonate construction
- Minimum load 10W

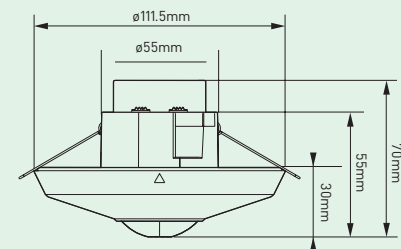

TECHNICAL DATA

Mounting	Surface or Flush
Sensor Type	Passive IR
Detection Range	7m Diameter at a 2.5m Mounting Height
Detection Angle	360° Adjustable with Lens Shield
Time on Adjustment	5 sec to 30 mins
Lux Setting (Lux)	0 to 2000
Load	- 2000W max. for Incandescent Light - 1000W max. for Halogen Light - 1000VA max. for Low Voltage Halogen Light - 900VA/100µ F for Fluorescent Light - 600VA (400W) Max. for Energy Saving Lamp (CFL PL Lamps)
Voltage	240V AC 50Hz
Operating Temperature	0°C to +45°C
Environment Protection	IP44