

Firewire Cables

MODEL CODE	LENGTH	TYPE
C-1394A-2	2M	6 pin to 6 pin
C-1394A-5	4.5M	6 pin to 6 pin
C-1394B-2	2M	4 pin to 6 pin
C-1394B-5	4.5M	4 pin to 6 pin
C-1394C-2	2M	4 pin to 4 pin
C-1394C-5	4.5M	4 pin to 4 pin


Transmission: up to 400Mbps



Firewire 2 Cables

MODEL CODE	LENGTH	TYPE
C-1394D-2	2M	9 pin to 9 pin
C-1394D-5	4.5M	9 pin to 9 pin
C-1394E-2	2M	9 pin to 4 pin
C-1394E-5	4.5M	9 pin to 4 pin
C-1394F-2	2M	9 pin to 6 pin
C-1394F-5	4.5M	9 pin to 6 pin


Transmission: up to 800Mbps

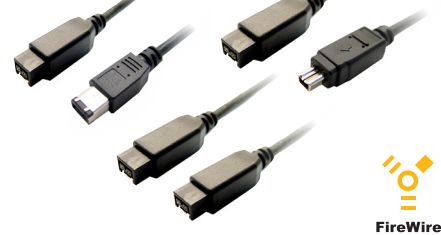

DB9 Cables

MODEL CODE	LENGTH	TYPE
C-MON-M	2M	D9 MF
C-MON-M3	3M	D9 MF
C-MON-M5	5M	D9 MF
C-MON-M10	10M	D9 MF
C-DB9-MM	2M	D9 MM
C-DB9-MM5	5M	D9 MM
C-DB9-FF	2M	D9 FF

A straight through DB9 cable used to connect computer peripherals

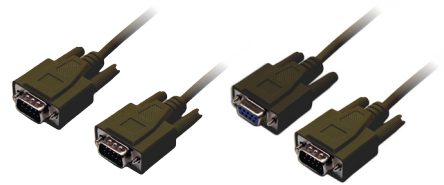

DB25 Male/Male

MODEL CODE	LENGTH
C-D25-MM1	1M
C-D25-MM2	2M
C-D25-MM5	5M
C-D25-MM7	7M
C-D25-MM10	10M
C-D25-MM15	15M

Standard 25 wire DB25 straight through male to male cable. Molded connectors



DB25 Male/Female

MODEL CODE	LENGTH
C-D25-MF1	1M
C-D25-MF	2M
C-D25-MF3	3M
C-D25-MF5	5M
C-D25-MF7	7M
C-D25-MF10	10M

Standard 25 wire DB25 straight through extension cable. Molded connectors



PC AT Serial Printer

MODEL CODE	LENGTH
C-SERAT-M	2M
C-SERAT-M5	5M
C-SERAT-M10	10M

Serial printer cable (DB9 Female / DB25 Male)



Null Modem

MODEL CODE	LENGTH	TYPE
C-NM25-FF	2M	D25 F/F
C-NM25-M	2M	D25 M/F
C-NM9-M	2M	D9F D25M
C-NM9-FF	2M	D9 F/F
C-NM9-FF5	5M	D9 F/F

A crossed cable, used to reverse control signals to allow two DTE devices to communicate



Parallel Printer Cables

MODEL CODE	LENGTH
C-IEEEAB-2	2M
C-IEEEAB-5	5M
C-PAR-M	2M
C-PAR-M3	3M
C-PAR-M5	5M
C-PAR-M10	10M

Bi-directional printer cable suitable for all parallel printers - Centronics 36 male to DB25 male



PS/2 Cables

MODEL CODE	LENGTH	TYPE
C-PKBD-M	2M	Male/Female
C-PKBD-M3	3M	Male/Female
C-PKBD-M5	5M	Male/Female
C-PKBD-M10	10M	Male/Female
C-PKBD-MM	2M	Male/Male
C-PKBD-MM3	3M	Male/Male
C-PKBD-MM5	5M	Male/Male
C-PKBD-MM10	10M	Male/Male

Standard PS/2 Mini Din6 keyboard/mouse extension cable

