



sasmira

The Synthetic & Art Silk Mills' Research Association

(APPROVED BODY BY MINISTRY OF TEXTILES, GOVT. OF INDIA)
SASMIRA MARG, WORLI, MUMBAI - 400 030.

Tel.: 2493 5351 / 52, 2493 2047, 2493 8753 / 54 (FPBX)
E-mail: ed@sasmira.org • testing@sasmira.org

Fax : 91-22-2493 0225
Web : www.sasmira.org

TEST REPORT

Page 1 of 2

Test Report No.	SASMIRA/TR-1337-/21-22	Date:	18.12.2021
Name & Address of customer	ARS Conscious Collective Pvt Ltd Plot No.9, 1st Floor, Hague Building, Ballard Estate, Mumbai-400001		
Particulars of sample given by the customer	One fabric sample		
Date of receipt: 02.12.2021	Date of testing:03.12.2021 to 18.12.2021		

Discipline – Hazardous and restricted chemicals

Product Group– Textile

Name of the Test : AZO Free Content

Name of Test Method: IS 15570:2005 RA 2015

Sample ID Mark : Light Yellow Colour Fabric

Results: Azo free content in given sample are:

Sr. No.	Name of Banned Amine	Results	Method Detection Limit(mg/kg)
1	4-Aminobiphenyl	Not Detected	20.0
2	Benzidine	Not Detected	20.0
3	4-chloro-o-toluidine	Not Detected	20.0
4	2-naphthylamine	Not Detected	20.0
5	o-aminoazotoluene	Not Detected	20.0
6	2-aminonitro-4-toluene	Not Detected	20.0
7	4-chloroaniline	Not Detected	20.0
8	2,4-diaminoanizole	Not Detected	20.0
9	3,3-dimethyl,4,4'-diaminodiphenylmethane	Not Detected	20.0
10	3,3'-dichlorobenzidine	Not Detected	20.0
11	3,3'-dimethoxybenzidine	Not Detected	20.0

NOTE : L / O4 / O5

- The result relate only to the samples submitted
- The test report shall not be reproduced except in full, without written approval of the laboratory and shall not be used for publicity or litigation
- The sample/s tested and reported is / are not drawn by the laboratory, unless otherwise specified

- Sample conditioning and testing : a) For IS, IS/ISO Test Method: Temp. of 27±2°C and Humidity of 65±2%. b) For ASTM & AATCC Test Method: Temp. of 21±2°C and Humidity of 65±5% and c) For ISO/DIN/ISO Test Method: Temp. of 20±2°C and Humidity of 65±2%
- The rating for Pilling test varies from 1 to 5, where 1 is "severe pilling" and /or "Dense surface fuzzing" and 5 is "No change".
- The rating for Change in shade/ Staining varies from 1 to 5 where 1 is poor and 5 is excellent.
- The rating for Light Fastness Test varies from 1 to 8, where 1 is poor and 8 is excellent.

Ashwico



sasmira

The Synthetic & Art Silk Mills' Research Association

(APPROVED BODY BY MINISTRY OF TEXTILES, GOVT. OF INDIA)
SASMIRA MARG, WORLI, MUMBAI - 400 030.

Tel.: 2493 5351 / 52, 2493 2047, 2493 8753 / 54 (EPBX)
E-mail: en@sasmira.org • testing@sasmira.org

Fax : 91-22-2493 0225
Web : www.sasmira.org

TEST REPORT

Page 2 of 2


Sr. No.	Name of Banned Amine	Results	Method Detection Limit(mg/kg)
12	3,3'-dimethylbenzidine	Not Detected	20.0
13	p-cresidine	Not Detected	20.0
14	4,4'-methylene-bis-[2-chloro-aniline]	Not Detected	20.0
15	4,4'-oxydianiline	Not Detected	20.0
16	4,4'-thiodianiline	Not Detected	20.0
17	o-toluidine	Not Detected	20.0
18	2,4-toluenediamine	Not Detected	20.0
19	2,4,5-trimethylaniline	Not Detected	20.0
20	o-anisidine	Not Detected	20.0
21	p-aminoazobenzene	Not Detected	20.0
22	3,3'-diaminodiphenylmethane	Not Detected	20.0

Note

*Small portion of the submitted sample enclosed herewith for reference.

Ashwin
Authorized Signatory
A. A. Sudam
Technical Manager

----End of Test Report-----

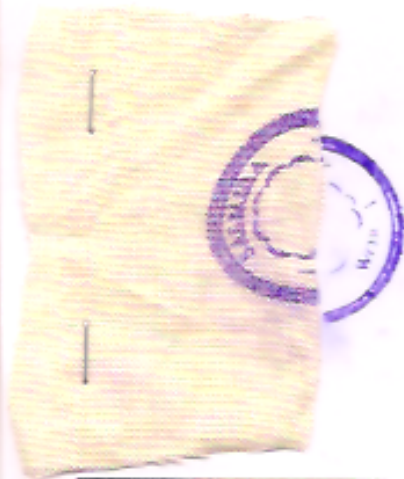

NOTE : L / 04 / 05

- The result relate only to the samples submitted
- The test report shall not be reproduced in full, without written approval of the laboratory and shall not be used for publicity or litigation
- The sample/s tested and reported is / are not drawn by the laboratory, unless otherwise specified

- Sample conditioning and testing : a) For IS, IS/ISO Test Method: Temp. of 21±2°C and Humidity of 65±2%, b) For ASTM & AATCC Test Method: Temp. of 21±2°C and Humidity of 65±5% and c) For ISO/DIN/JISL Test Method: Temp. of 20±2°C and Humidity of 65±2%
- The rating for Pilling test varies from 1 to 5, where 1 is "severe pilling" and/or "dense surface fuzzing" and 5 is "No change".
- The rating for Change in shade/ Staining varies from 1 to 5 where 1 is poor and 5 is excellent.
- The rating for Light Fastness Test varies from 1 to 8, where 1 is poor and 8 is excellent.