




CH_{EL} Chicago Emergency Light



These rugged steel units have been designed for easy installation and maintenance. All parts and wiring are front accessible. The attractive cabinets fit any décor and are ideal for both commercial and industrial use.

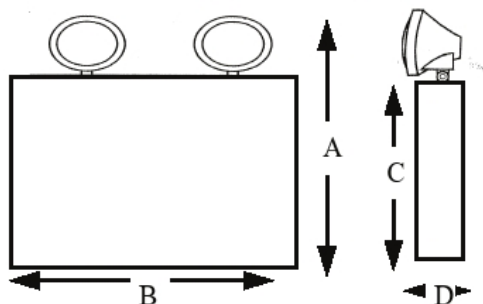

SERIES AC AND ACL

6 Volt

Catalog No	Capacity in Watts (hours) 1½	Watts per Head HSB	Dimensions				Weight (appro x) in lbs
			A	B	C	D	
CHEL 6-24	24	12	12 1/4	9	6 1/2	2 1/2	11
CHEL 6-36	36	12	12 1/4	9	6 1/2	2 1/2	14

12 Volts

CHEL 12-24	24	12	15	10 1/4	9	2 1/2	12
CHEL 12-36	36	12	15	13 3/8	9	2 1/2	16
CHEL 12-54	54	12	15	13 3/8	9	2 1/2	20

STANDARD FEATURES

- Dual 120/277 volt 60 Hz input, other voltages are optional.
- Fully automatic solid state charger returns battery to full charge after return of AC supply.
- Solid state relay supervision features low battery voltage disconnect, AC lockout and brownout protection.
- High charge and AC ready LED indicators.
- Long life valve regulated lead acid maintenance free battery provide a minimum of 90 minutes of emergency illumination.
- Heavy duty steel construction finished in white powder coat paint. Other colors optional.
- Unit comes with two metal heads.
- Remote test is optional and requires an IRT hand held tester.
- **MADE IN THE USA**

OPTIONS Add suffix

- B Black
- G Gray
- E Self-diagnostics
- V Voltmeter¹
- A Ammeter¹
- RT Remote test
- TD Time delay relay
- 0H No heads
- 1H 1 head
- 3H 3 heads
- SM Side mounted heads
- CP 3 foot cord and plug
- NI Nickel cadmium battery

Note: 1 Only one meter may be installed.

AGENCY APPROVALS

ETL Listed to UL924.

Meets or exceeds the requirements of the National Electrical Code and NFPA Life Safety Code 101. Meets or exceeds the Chicago City Code.

WARRANTY

See warranty information at back of catalog for details.